Ground floor plan

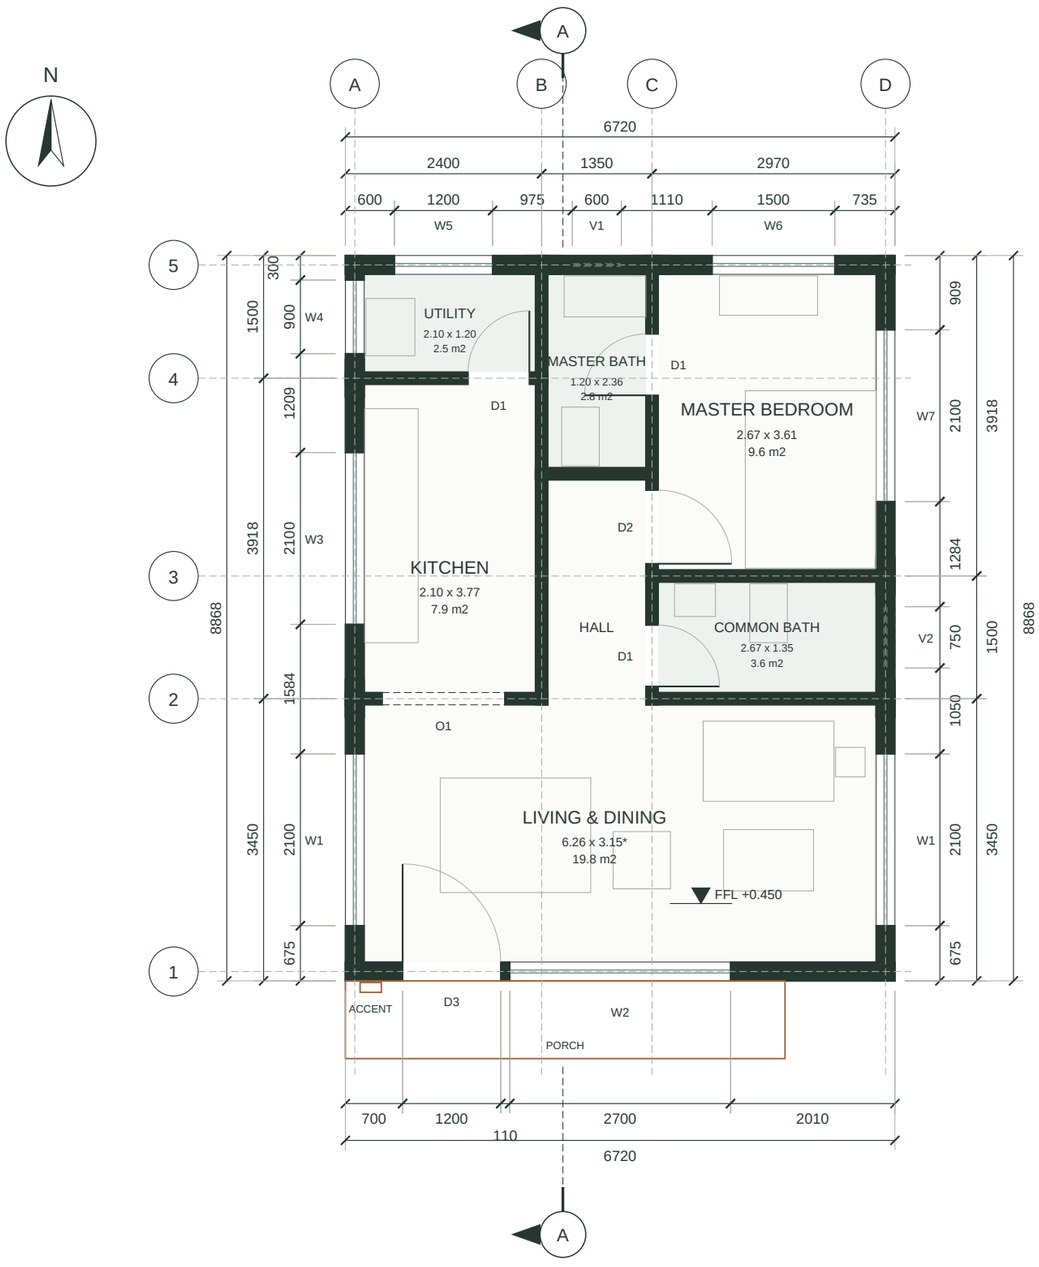

The Quiet Studio

SPACE	CLEAR SIZE m	AREA m2
Living & dining	6.26 x 3.15*	19.78
Hall	1.20 x 2.67	3.21
Kitchen	2.10 x 3.77	7.89
Utility	2.10 x 1.20	2.50
Common bath	2.67 x 1.35	3.60
Master bedroom	2.67 x 3.61	9.63
Master bath	1.20 x 2.36	2.84

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

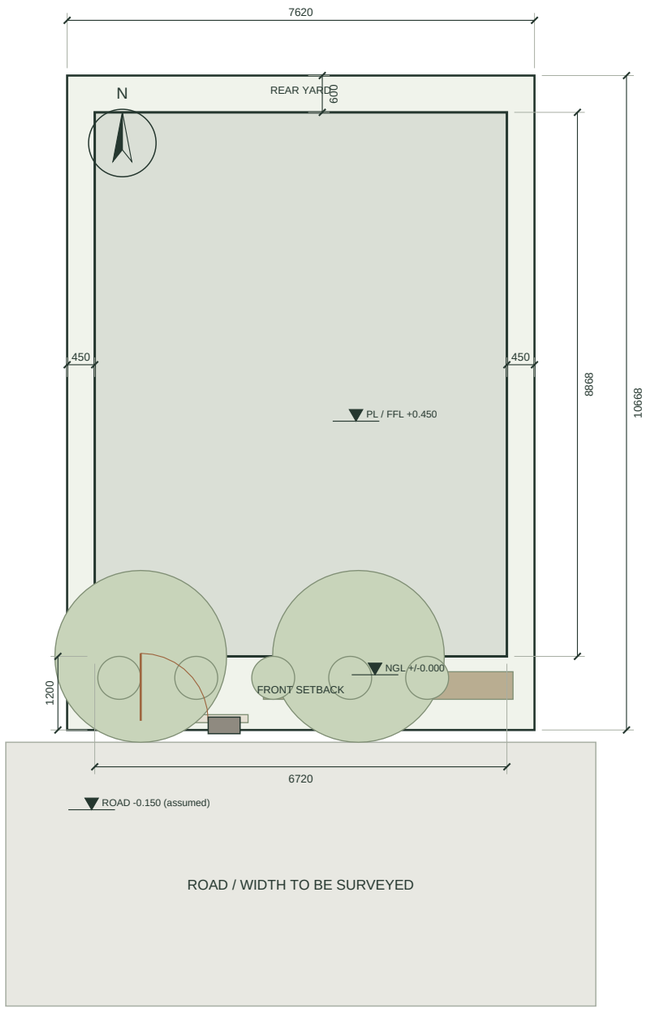

0 m 2 m 4 m

The Quiet Studio

AREA STATEMENT	VALUE	UNIT
Plot	81.29	m2
Footprint	59.593	m2
Gross floors	59.593	m2
Coverage	73.31	percent
Geometric FAR	0.733	ratio

DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

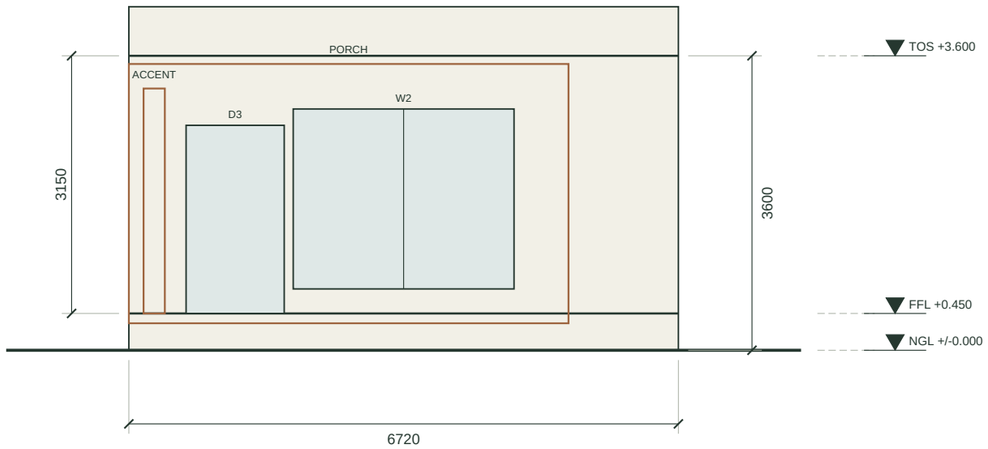

0 m 2 m 4 m

The Quiet Studio

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

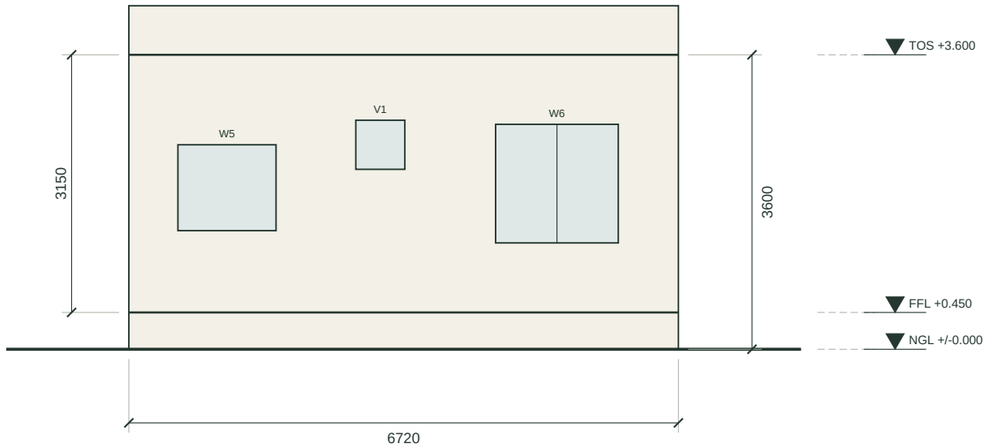

0 m 2 m 4 m

The Quiet Studio

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Left elevation

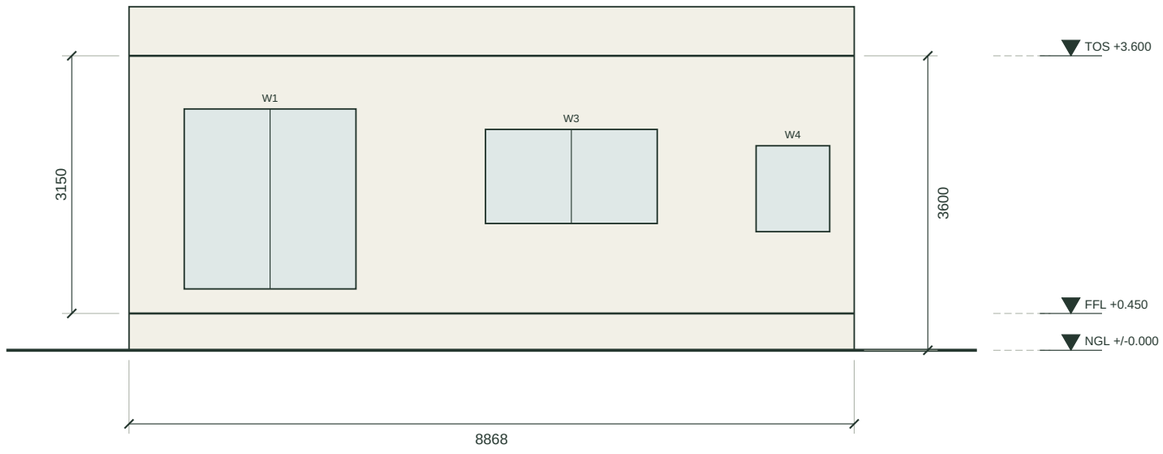

0 m 2 m 4 m

The Quiet Studio

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Right elevation

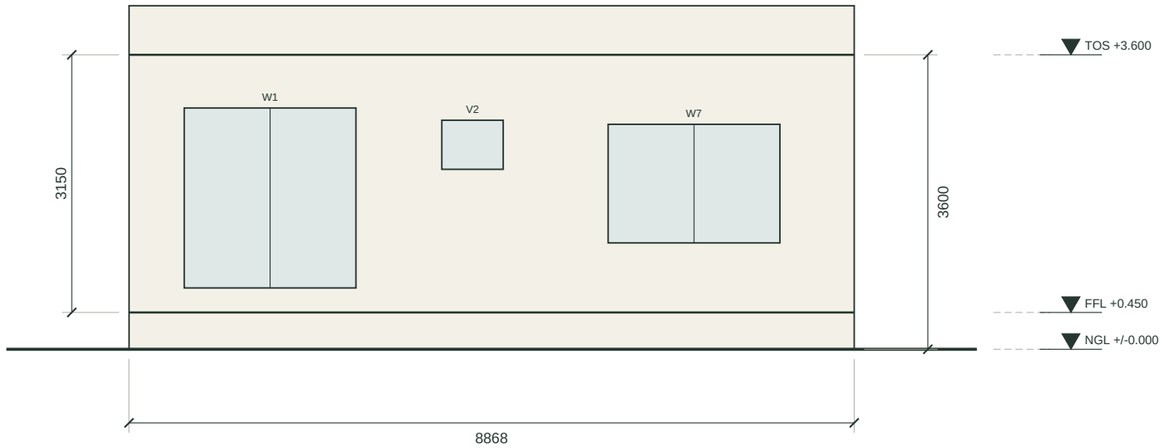

0 m 2 m 4 m

The Quiet Studio

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Section A-A / x = 2.66 m

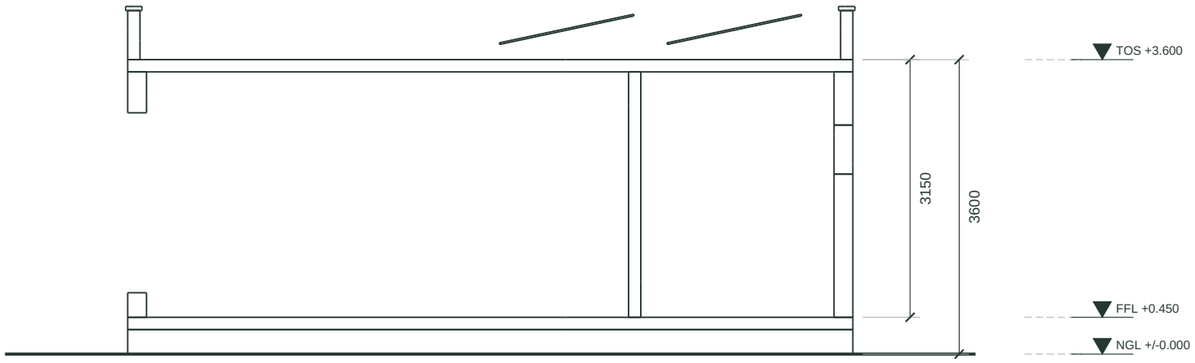

0 m 2 m 4 m

The Quiet Studio

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Door, window and room schedules

DOOR AND WINDOW SCHEDULE

TAG	DESCRIPTION	SIZE W x H (mm)	SILL	NO.	LOCATION
D1	Flush door, water-resistant (WPC)	750 x 2100	-	3	Master bath, Common bath, Utility
D2	Flush door, hardwood frame	900 x 2100	-	1	Master bedroom
D3	Main door, solid timber leaf in frame	1200 x 2300	-	1	Living & dining
O1	Cased opening, no leaf	1500 x 2100	-	1	Kitchen / Living & dining
W1	Sliding window, aluminium	2100 x 2200	300	2	Living & dining
W2	Sliding window, aluminium	2700 x 2200	300	1	Living & dining
W3	Sliding window, aluminium	2100 x 1150	1100	1	Kitchen
W4	Sliding window, aluminium	900 x 1050	1000	1	Utility
W5	Sliding window, aluminium	1200 x 1050	1000	1	Utility
W6	Sliding window, aluminium	1500 x 1450	850	1	Master bedroom
W7	Sliding window, aluminium	2100 x 1450	850	1	Master bedroom
V1	Ventilator, obscured glass / louvres	600 x 600	1750	1	Master bath
V2	Ventilator, obscured glass / louvres	750 x 600	1750	1	Common bath

ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

SPACE	FLOOR	CLEAR SIZE (m)	CLEAR SIZE (ft-in)	AREA m2	AREA ft2
Living & dining	Ground	6.26 x 3.15	20'6" x 10'4"	19.78	213
Hall	Ground	1.20 x 2.67	3'11" x 8'9"	3.21	35
Kitchen	Ground	2.10 x 3.77	6'10" x 12'4"	7.89	85
Utility	Ground	2.10 x 1.20	6'10" x 3'11"	2.50	27
Common bath	Ground	2.67 x 1.35	8'9" x 4'5"	3.60	39
Master bedroom	Ground	2.67 x 3.61	8'9" x 11'10"	9.63	104
Master bath	Ground	1.20 x 2.36	3'11" x 7'9"	2.84	31

Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

Coordination axes / NOT a structural design

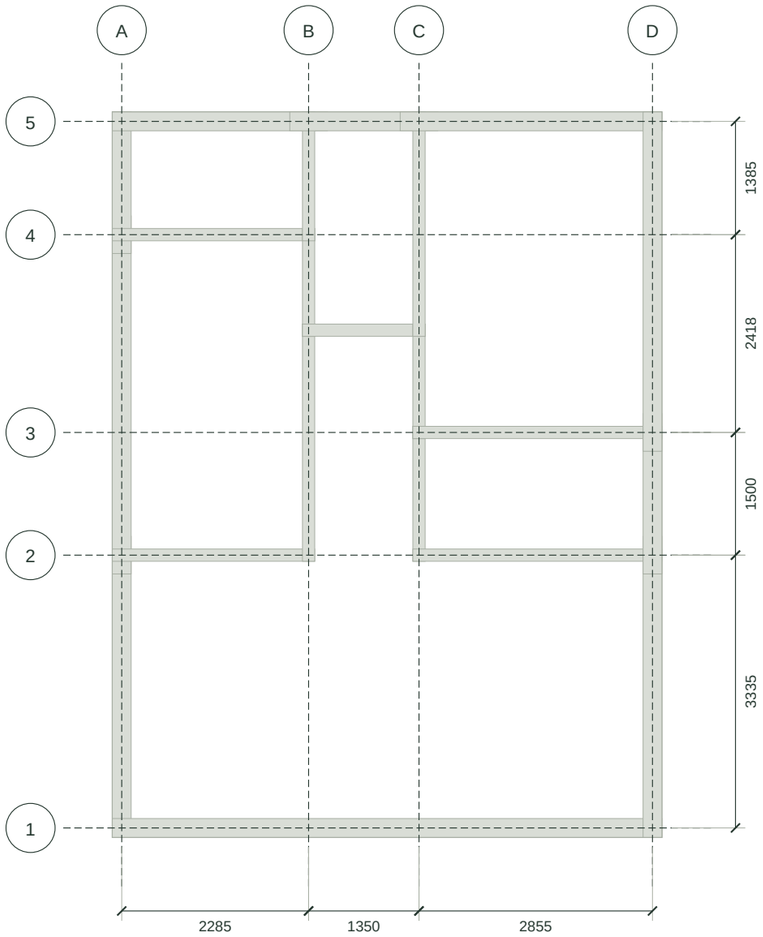

0 m 2 m 4 m

The Quiet Studio

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

Passing geometric checks is not evidence of construction safety or statutory compliance.

FLOORFORGE / COST / SCENARIO

Gross floor area	641.45 ft2
Illustrative range	INR 14.11 - 19.76 lakh
Owner budget	INR 18 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

Soil	unknown
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	47.93 degrees
Vastu score	17 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 6 weeks
Masonry and services	Week 15 + 7 weeks
Finishes and joinery	Week 22 + 8 weeks
Testing and handover	Week 30 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1 x3	Flush door, water-resistant (WPC) / 750 x 2100 / sill 0 mm
D2 x1	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
D3 x1	Main door, solid timber leaf in frame / 1200 x 2300 / sill 0 mm
O1 x1	Cased opening, no leaf / 1500 x 2100 / sill 0 mm
W1 x2	Sliding window, aluminium / 2100 x 2200 / sill 300 mm
W2 x1	Sliding window, aluminium / 2700 x 2200 / sill 300 mm
W3 x1	Sliding window, aluminium / 2100 x 1150 / sill 1100 mm
W4 x1	Sliding window, aluminium / 900 x 1050 / sill 1000 mm
W5 x1	Sliding window, aluminium / 1200 x 1050 / sill 1000 mm
W6 x1	Sliding window, aluminium / 1500 x 1450 / sill 850 mm
W7 x1	Sliding window, aluminium / 2100 x 1450 / sill 850 mm
V1 x1	Ventilator, obscured glass / louvres / 600 x 600 / sill 1750 mm
V2 x1	Ventilator, obscured glass / louvres / 750 x 600 / sill 1750 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION