
Ground floor plan

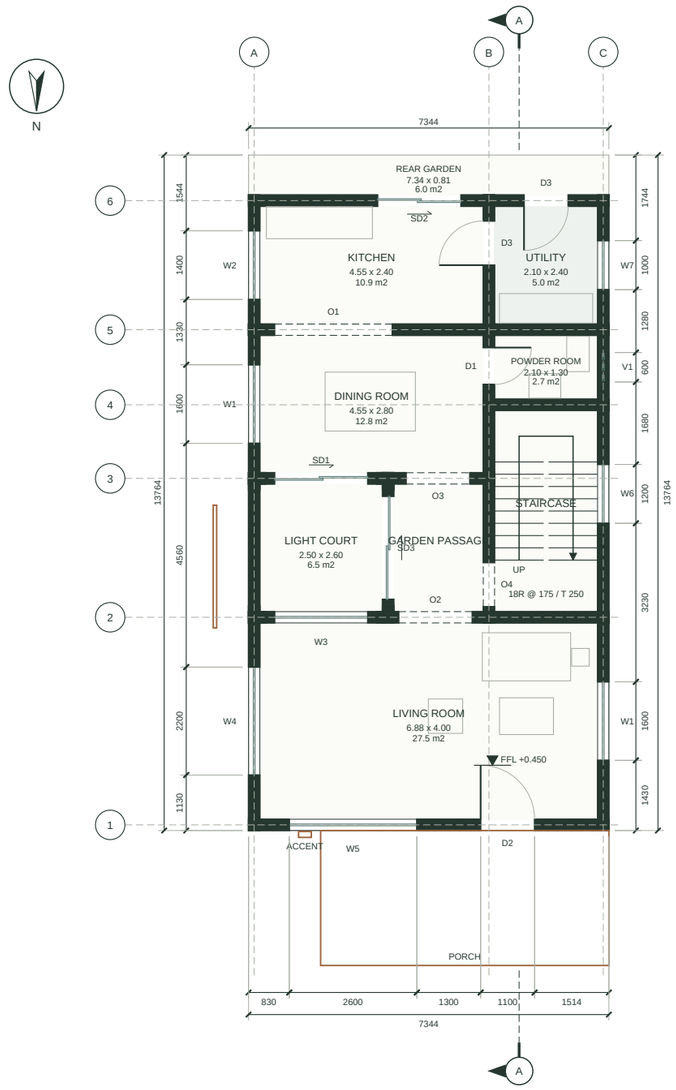

0 m 2 m 4 m

The Long House

SPACE	CLEAR SIZE m	AREA m2
Light court	2.50 x 2.60	6.50
Dining room	4.55 x 2.80	12.75
Rear garden	7.34 x 0.81	5.98
Kitchen	4.55 x 2.40	10.93
Living room	6.88 x 4.00	27.54
Garden passage	1.82 x 2.60	4.74
Powder room	2.10 x 1.30	2.73
Utility	2.10 x 2.40	5.04

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

First floor plan

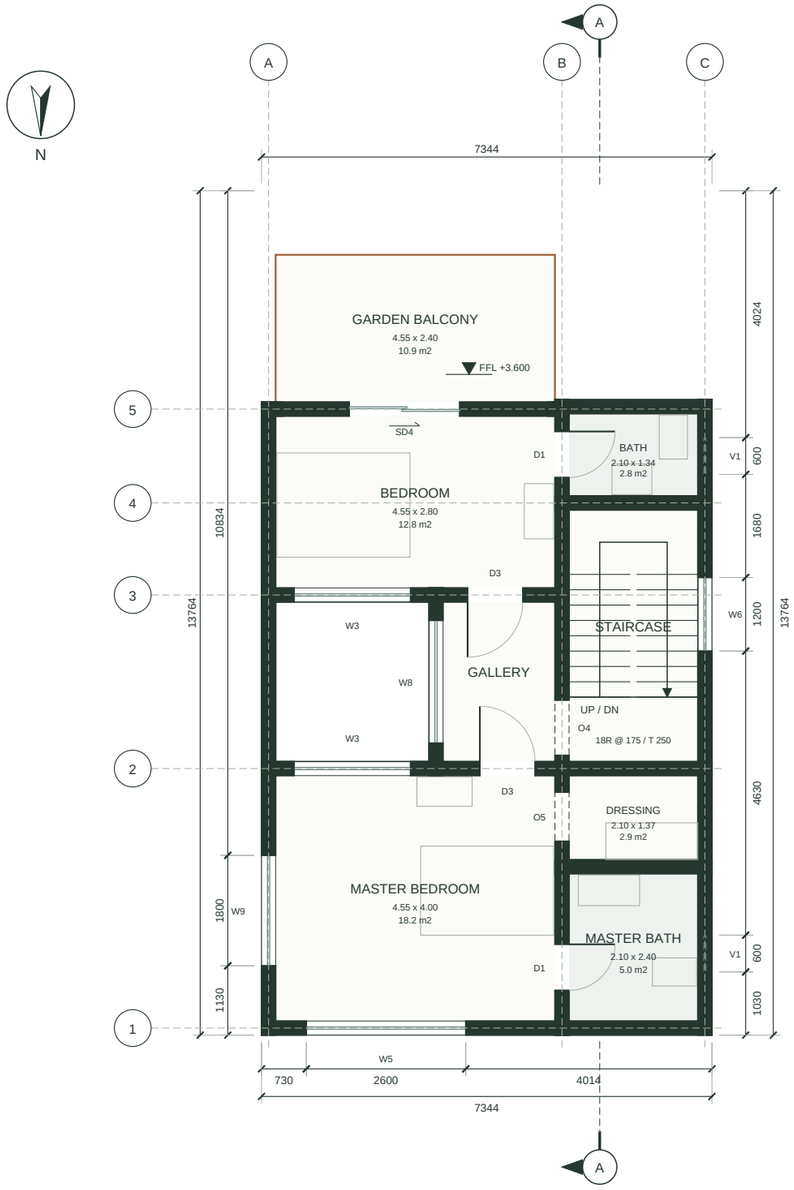

0 m 2 m 4 m

The Long House

SPACE	CLEAR SIZE m	AREA m2
Garden balcony	4.55 x 2.40	10.93
Bath	2.10 x 1.34	2.81
Bedroom	4.55 x 2.80	12.75
Dressing	2.10 x 1.37	2.88
Gallery	1.82 x 2.60	4.74
Master bedroom	4.55 x 4.00	18.22
Master bath	2.10 x 2.40	5.04

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

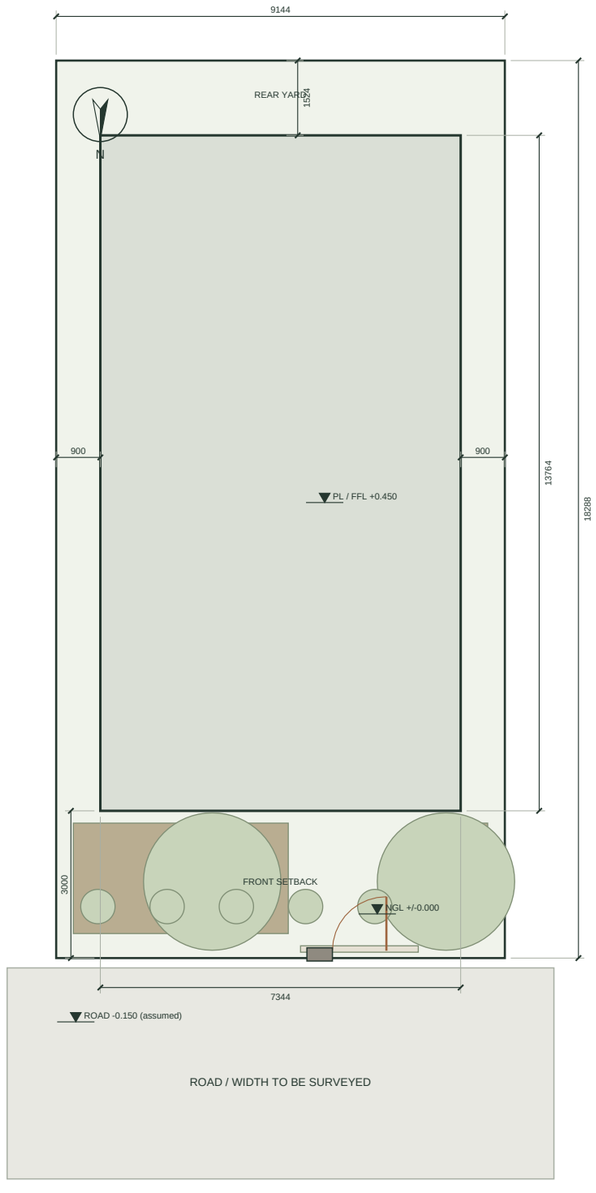

0 m 2 m 4 m

The Long House

AREA STATEMENT	VALUE	UNIT
Plot	167.225	m2
Footprint	101.083	m2
Gross floors	175.0	m2
Coverage	60.45	percent
Geometric FAR	1.046	ratio

DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

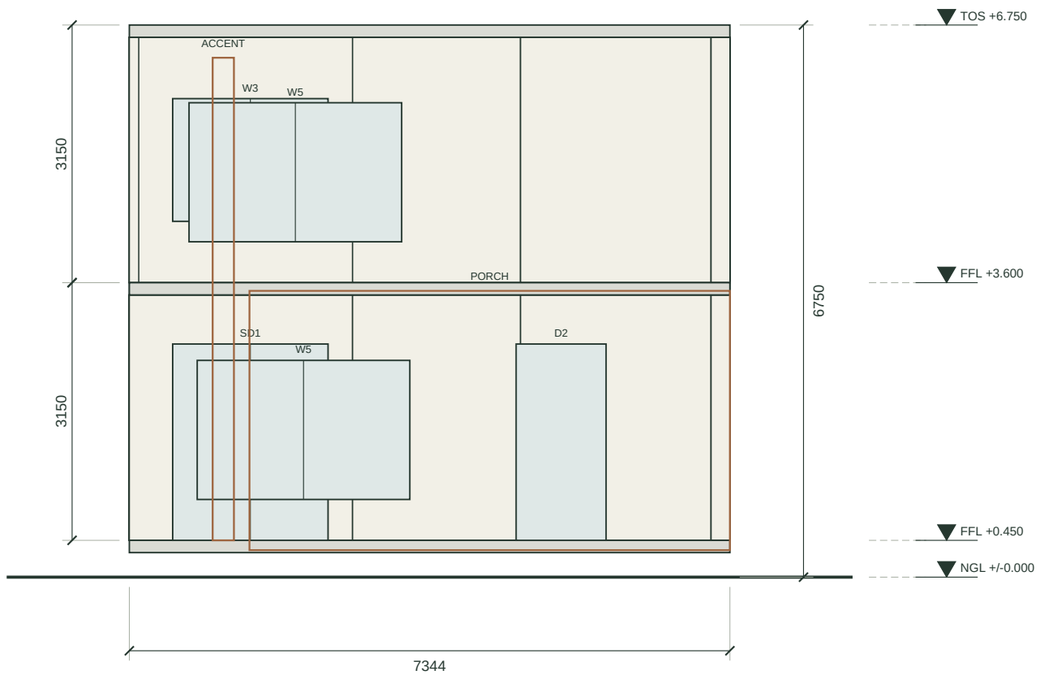

0 m 2 m 4 m

The Long House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

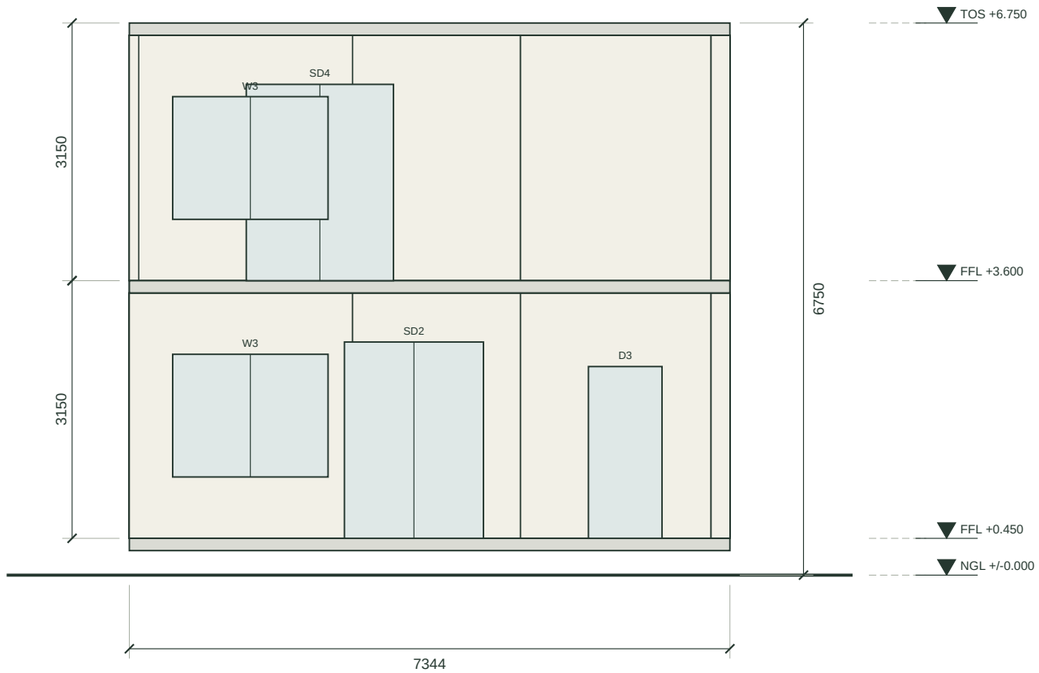

0 m 2 m 4 m

The Long House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Left elevation

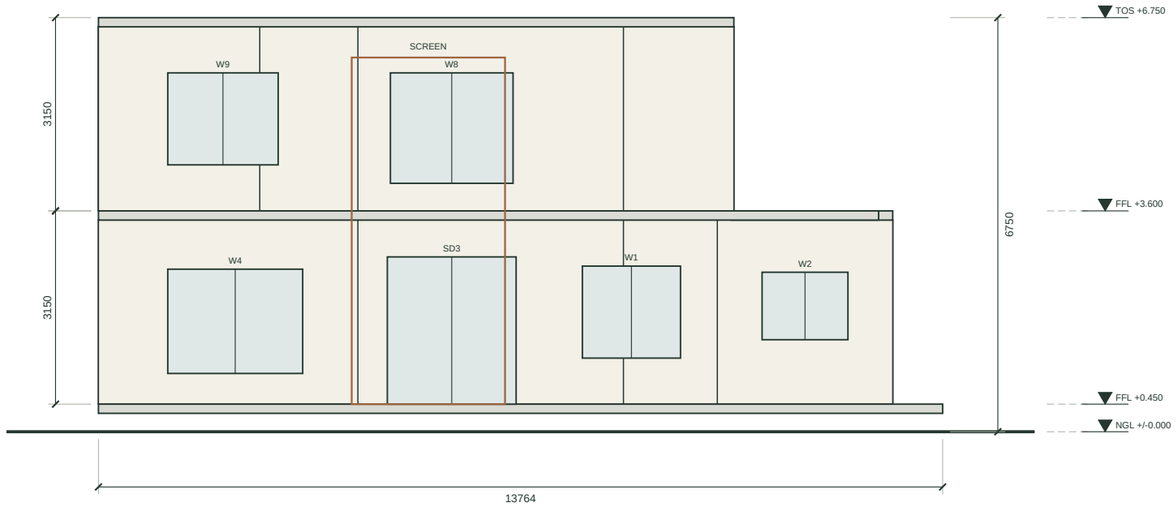

0 m 2 m 4 m

The Long House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Right elevation

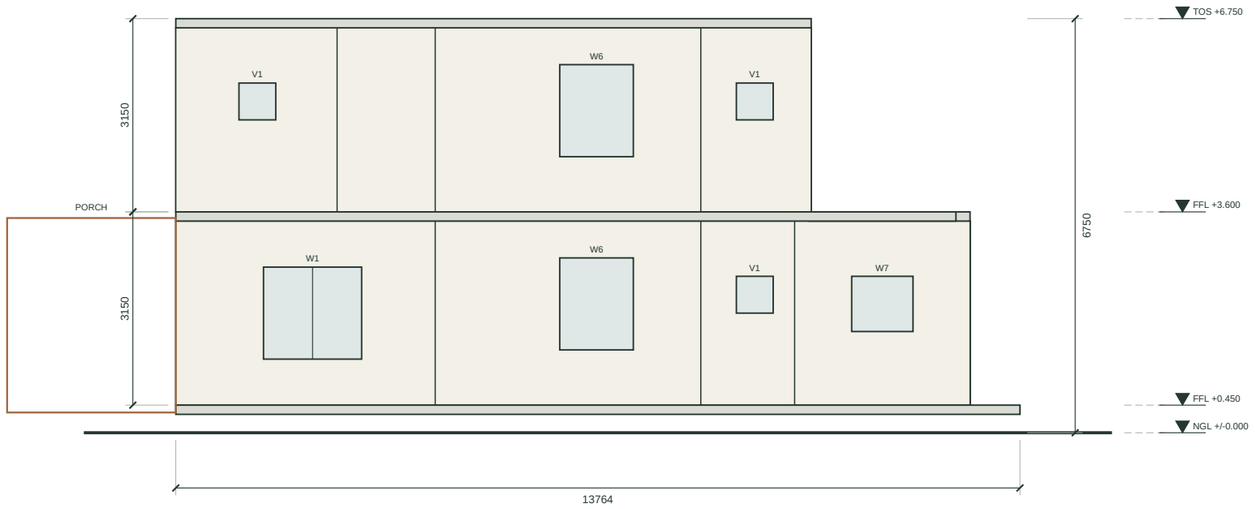

0 m 2 m 4 m

The Long House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Section A-A / x = 5.51 m

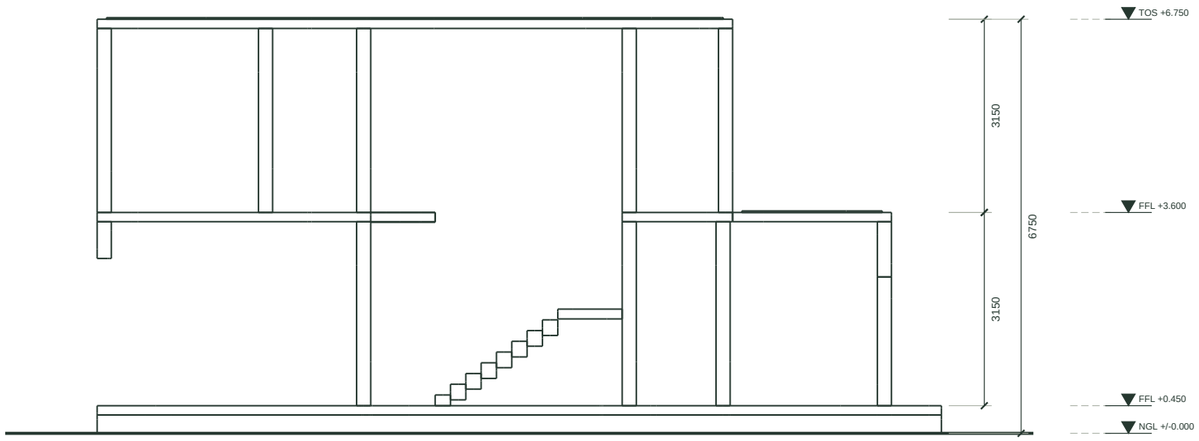

0 m 2 m 4 m

The Long House

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Door, window and room schedules

DOOR AND WINDOW SCHEDULE


TAG	DESCRIPTION	SIZE W x H (mm)	SILL	NO.	LOCATION
D1	Flush door, water-resistant (WPC)	750 x 2100	-	3	Powder room, Bath, Master bath
D2	Main door, solid timber leaf in frame	1100 x 2400	-	1	Living room
D3	Flush door, hardwood frame	900 x 2100	-	4	Kitchen, Utility, Gallery
SD1	Sliding glazed door, aluminium	1900 x 2400	-	1	Light court / Dining room
SD2	Sliding glazed door, aluminium	1700 x 2400	-	1	Rear garden / Kitchen
SD3	Sliding glazed door, aluminium	2100 x 2400	-	1	Light court / Garden passage
SD4	Sliding glazed door, aluminium	1800 x 2400	-	1	Garden balcony / Bedroom
O1	Cased opening, no leaf	2400 x 2400	-	1	Dining room / Kitchen
O2	Cased opening, no leaf	1500 x 2400	-	1	Living room / Garden passage
O3	Cased opening, no leaf	1300 x 2400	-	1	Dining room / Garden passage
O4	Cased opening, no leaf	900 x 2400	-	2	Garden passage / Staircase +1 more
O5	Cased opening, no leaf	800 x 2100	-	1	Dressing / Master bedroom
W1	Sliding window, aluminium	1600 x 1500	750	2	Dining room, Living room
W2	Sliding window, aluminium	1400 x 1100	1050	1	Kitchen
W3	Sliding window, aluminium	1900 x 1500	750	3	Light court, Bedroom, Master bedroom
W4	Sliding window, aluminium	2200 x 1700	500	1	Living room
W5	Sliding window, aluminium	2600 x 1700	500	2	Living room, Master bedroom
W6	Sliding window, aluminium	1200 x 1500	900	2	Staircase
W7	Sliding window, aluminium	1000 x 900	1200	1	Utility
W8	Sliding window, aluminium	2000 x 1800	450	1	Gallery
W9	Sliding window, aluminium	1800 x 1500	750	1	Master bedroom
V1	Ventilator, obscured glass / louvres	600 x 600	1500	3	Powder room, Bath, Master bath

ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

SPACE	FLOOR	CLEAR SIZE (m)	CLEAR SIZE (ft-in)	AREA m2	AREA ft2
Light court	Ground	2.50 x 2.60	8'2" x 8'6"	6.50	70
Dining room	Ground	4.55 x 2.80	14'11" x 9'2"	12.75	137
Rear garden	Ground	7.34 x 0.81	24'1" x 2'8"	5.98	64
Kitchen	Ground	4.55 x 2.40	14'11" x 7'10"	10.93	118
Living room	Ground	6.88 x 4.00	22'7" x 13'1"	27.54	296
Garden passage	Ground	1.82 x 2.60	6'0" x 8'6"	4.74	51
Powder room	Ground	2.10 x 1.30	6'11" x 4'3"	2.73	29
Utility	Ground	2.10 x 2.40	6'11" x 7'10"	5.04	54
Garden balcony	First	4.55 x 2.40	14'11" x 7'10"	10.93	118
Bath	First	2.10 x 1.34	6'11" x 4'5"	2.81	30
Bedroom	First	4.55 x 2.80	14'11" x 9'2"	12.75	137
Dressing	First	2.10 x 1.37	6'11" x 4'6"	2.88	31
Gallery	First	1.82 x 2.60	6'0" x 8'6"	4.74	51
Master bedroom	First	4.55 x 4.00	14'11" x 13'1"	18.22	196
Master bath	First	2.10 x 2.40	6'11" x 7'10"	5.04	54

Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

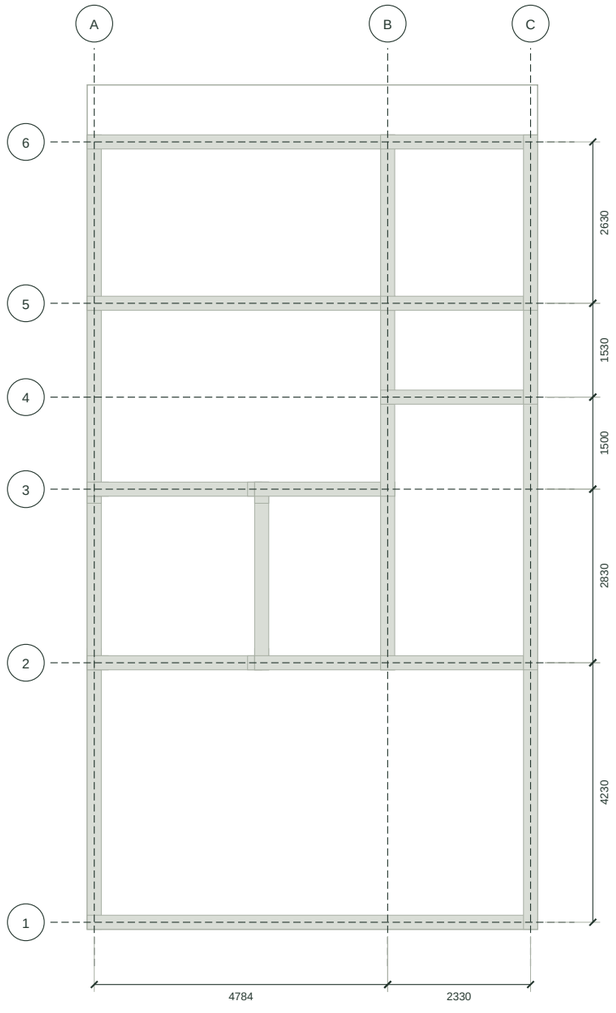

0 m 2 m 4 m

The Long House

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

Passing geometric checks is not evidence of construction safety or statutory compliance.

FLOORFORGE / COST / SCENARIO

Gross floor area	1883.68 ft2
Illustrative range	INR 41.44 - 58.02 lakh
Owner budget	INR 65.0 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

FLOORFORGE / SITE / SERVICES / STRUCTURE

Soil	unknown
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	28.45 degrees
Vastu score	40 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 12 weeks
Masonry and services	Week 19 + 7 weeks
Finishes and joinery	Week 26 + 8 weeks
Testing and handover	Week 34 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1 x3	Flush door, water-resistant (WPC) / 750 x 2100 / sill 0 mm
D2 x1	Main door, solid timber leaf in frame / 1100 x 2400 / sill 0 mm
D3 x4	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
SD1 x1	Sliding glazed door, aluminium / 1900 x 2400 / sill 0 mm
SD2 x1	Sliding glazed door, aluminium / 1700 x 2400 / sill 0 mm
SD3 x1	Sliding glazed door, aluminium / 2100 x 2400 / sill 0 mm
SD4 x1	Sliding glazed door, aluminium / 1800 x 2400 / sill 0 mm
O1 x1	Cased opening, no leaf / 2400 x 2400 / sill 0 mm
O2 x1	Cased opening, no leaf / 1500 x 2400 / sill 0 mm
O3 x1	Cased opening, no leaf / 1300 x 2400 / sill 0 mm
O4 x2	Cased opening, no leaf / 900 x 2400 / sill 0 mm
O5 x1	Cased opening, no leaf / 800 x 2100 / sill 0 mm
W1 x2	Sliding window, aluminium / 1600 x 1500 / sill 750 mm
W2 x1	Sliding window, aluminium / 1400 x 1100 / sill 1050 mm
W3 x3	Sliding window, aluminium / 1900 x 1500 / sill 750 mm
W4 x1	Sliding window, aluminium / 2200 x 1700 / sill 500 mm
W5 x2	Sliding window, aluminium / 2600 x 1700 / sill 500 mm
W6 x2	Sliding window, aluminium / 1200 x 1500 / sill 900 mm
W7 x1	Sliding window, aluminium / 1000 x 900 / sill 1200 mm
W8 x1	Sliding window, aluminium / 2000 x 1800 / sill 450 mm
W9 x1	Sliding window, aluminium / 1800 x 1500 / sill 750 mm
V1 x3	Ventilator, obscured glass / louvres / 600 x 600 / sill 1500 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION