




SPACE	CLEAR SIZE m	AREA m2
Master attached bathroom	1.95 x 2.38	4.63
Master bedroom · southwest	5.45 x 4.00*	27.57
Rear bedroom ventilation reces	3.70 x 0.90	3.33
Home care room	6.79 x 4.15	28.17
Ventilation lightwell	1.85 x 0.90	1.67
Care lawn and rear garden path	2.70 x 5.78*	24.79
Caregiver bedroom · rear strip	2.40 x 3.13	7.50
Caregiver attached toilet	2.40 x 1.30	3.12
Covered lightwell edge	0.75 x 0.90	0.68
Entry hall	3.30 x 2.20*	9.69
Drawing room · northeast	4.12 x 5.50	22.64
Modular kitchen · southeast	4.20 x 3.30	13.86
Kitchen pantry	1.35 x 1.85	2.50
Living and dining hall	5.07 x 4.10*	27.57
Open puja alcove	1.80 x 1.65	2.97
Care veranda · north	6.69 x 2.60	17.39
Open wash area	1.35 x 1.30	1.75

Dimensions govern; do not scale from a screen.

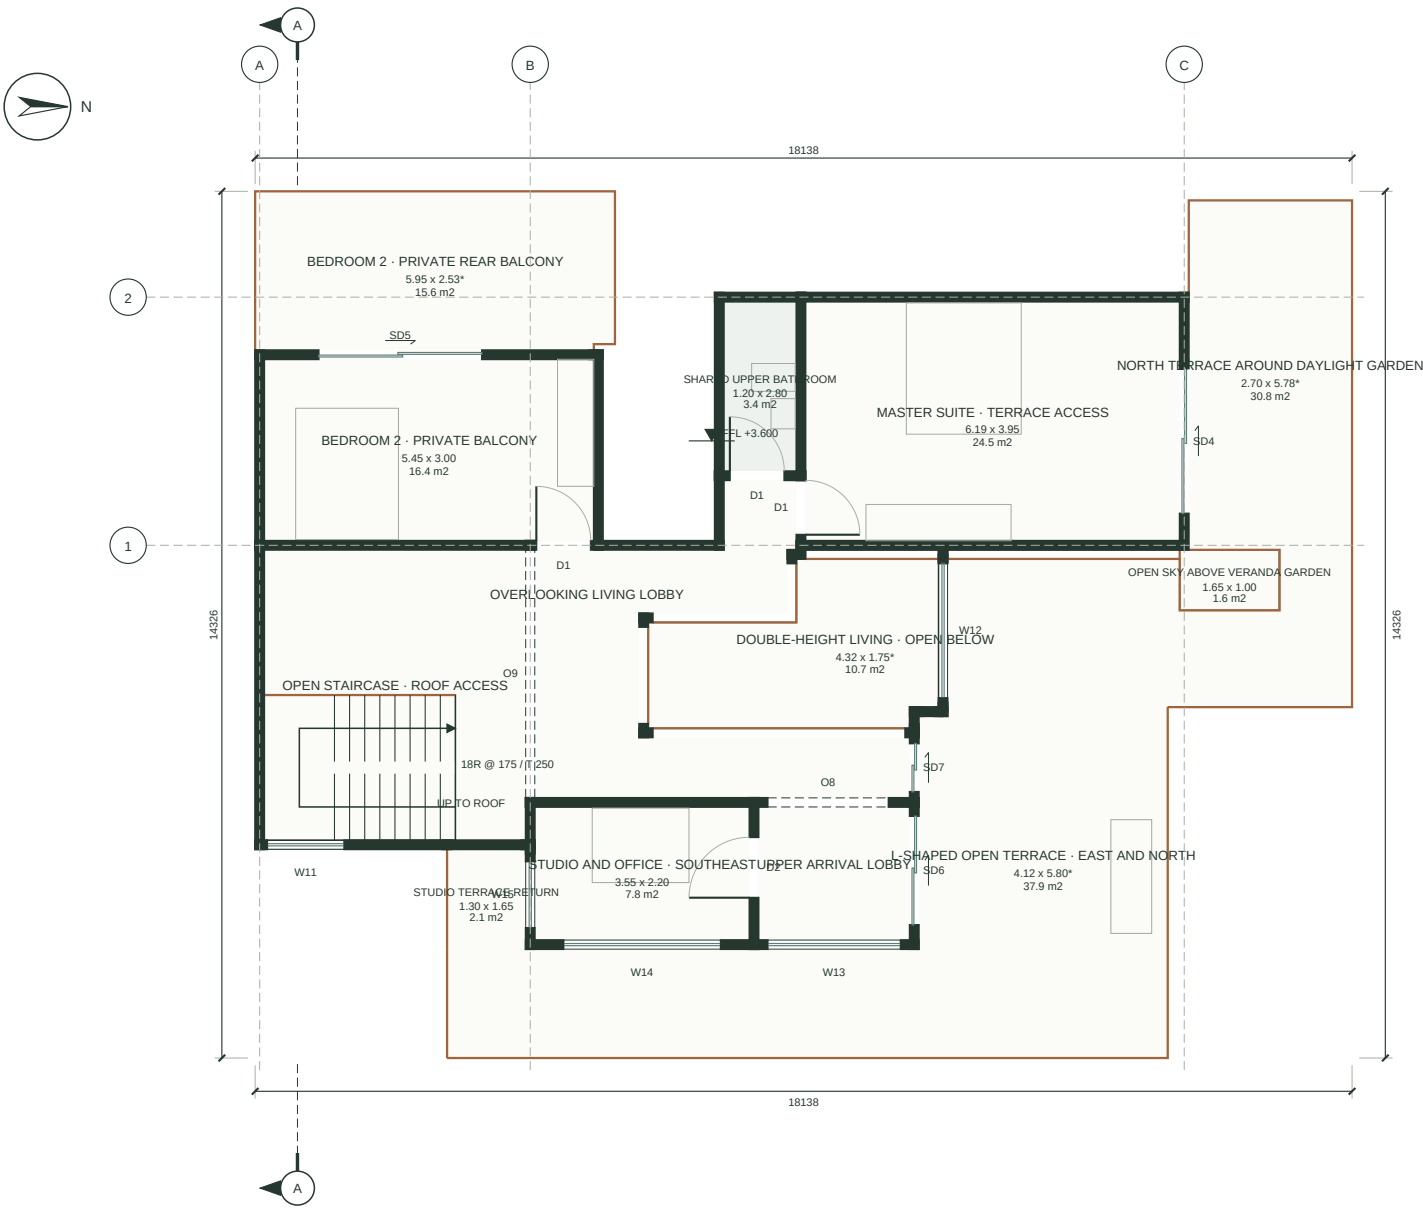

My Desired Home

SPACE	CLEAR SIZE m	AREA m2
Shared upper bathroom	1.20 x 2.80	3.36
Master suite · terrace access	6.19 x 3.95	24.45
Bedroom 2 · private balcony	5.45 x 3.00	16.35
Bedroom 2 · private rear balco	5.95 x 2.53*	15.59
Open sky above veranda garden	1.65 x 1.00	1.65
Double-height living · open be	4.32 x 1.75*	10.70
Upper arrival lobby	2.50 x 2.20	5.50
Overlooking living lobby	1.73 x 4.10*	15.50
Studio and office · southeast	3.55 x 2.20	7.81
Studio terrace return	1.30 x 1.65	2.15
L-shaped open terrace · east a	4.12 x 5.80*	37.91
North terrace around daylight	2.70 x 5.78*	30.76

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).


Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions.

No certified IS 962 or local-code compliance is claimed.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

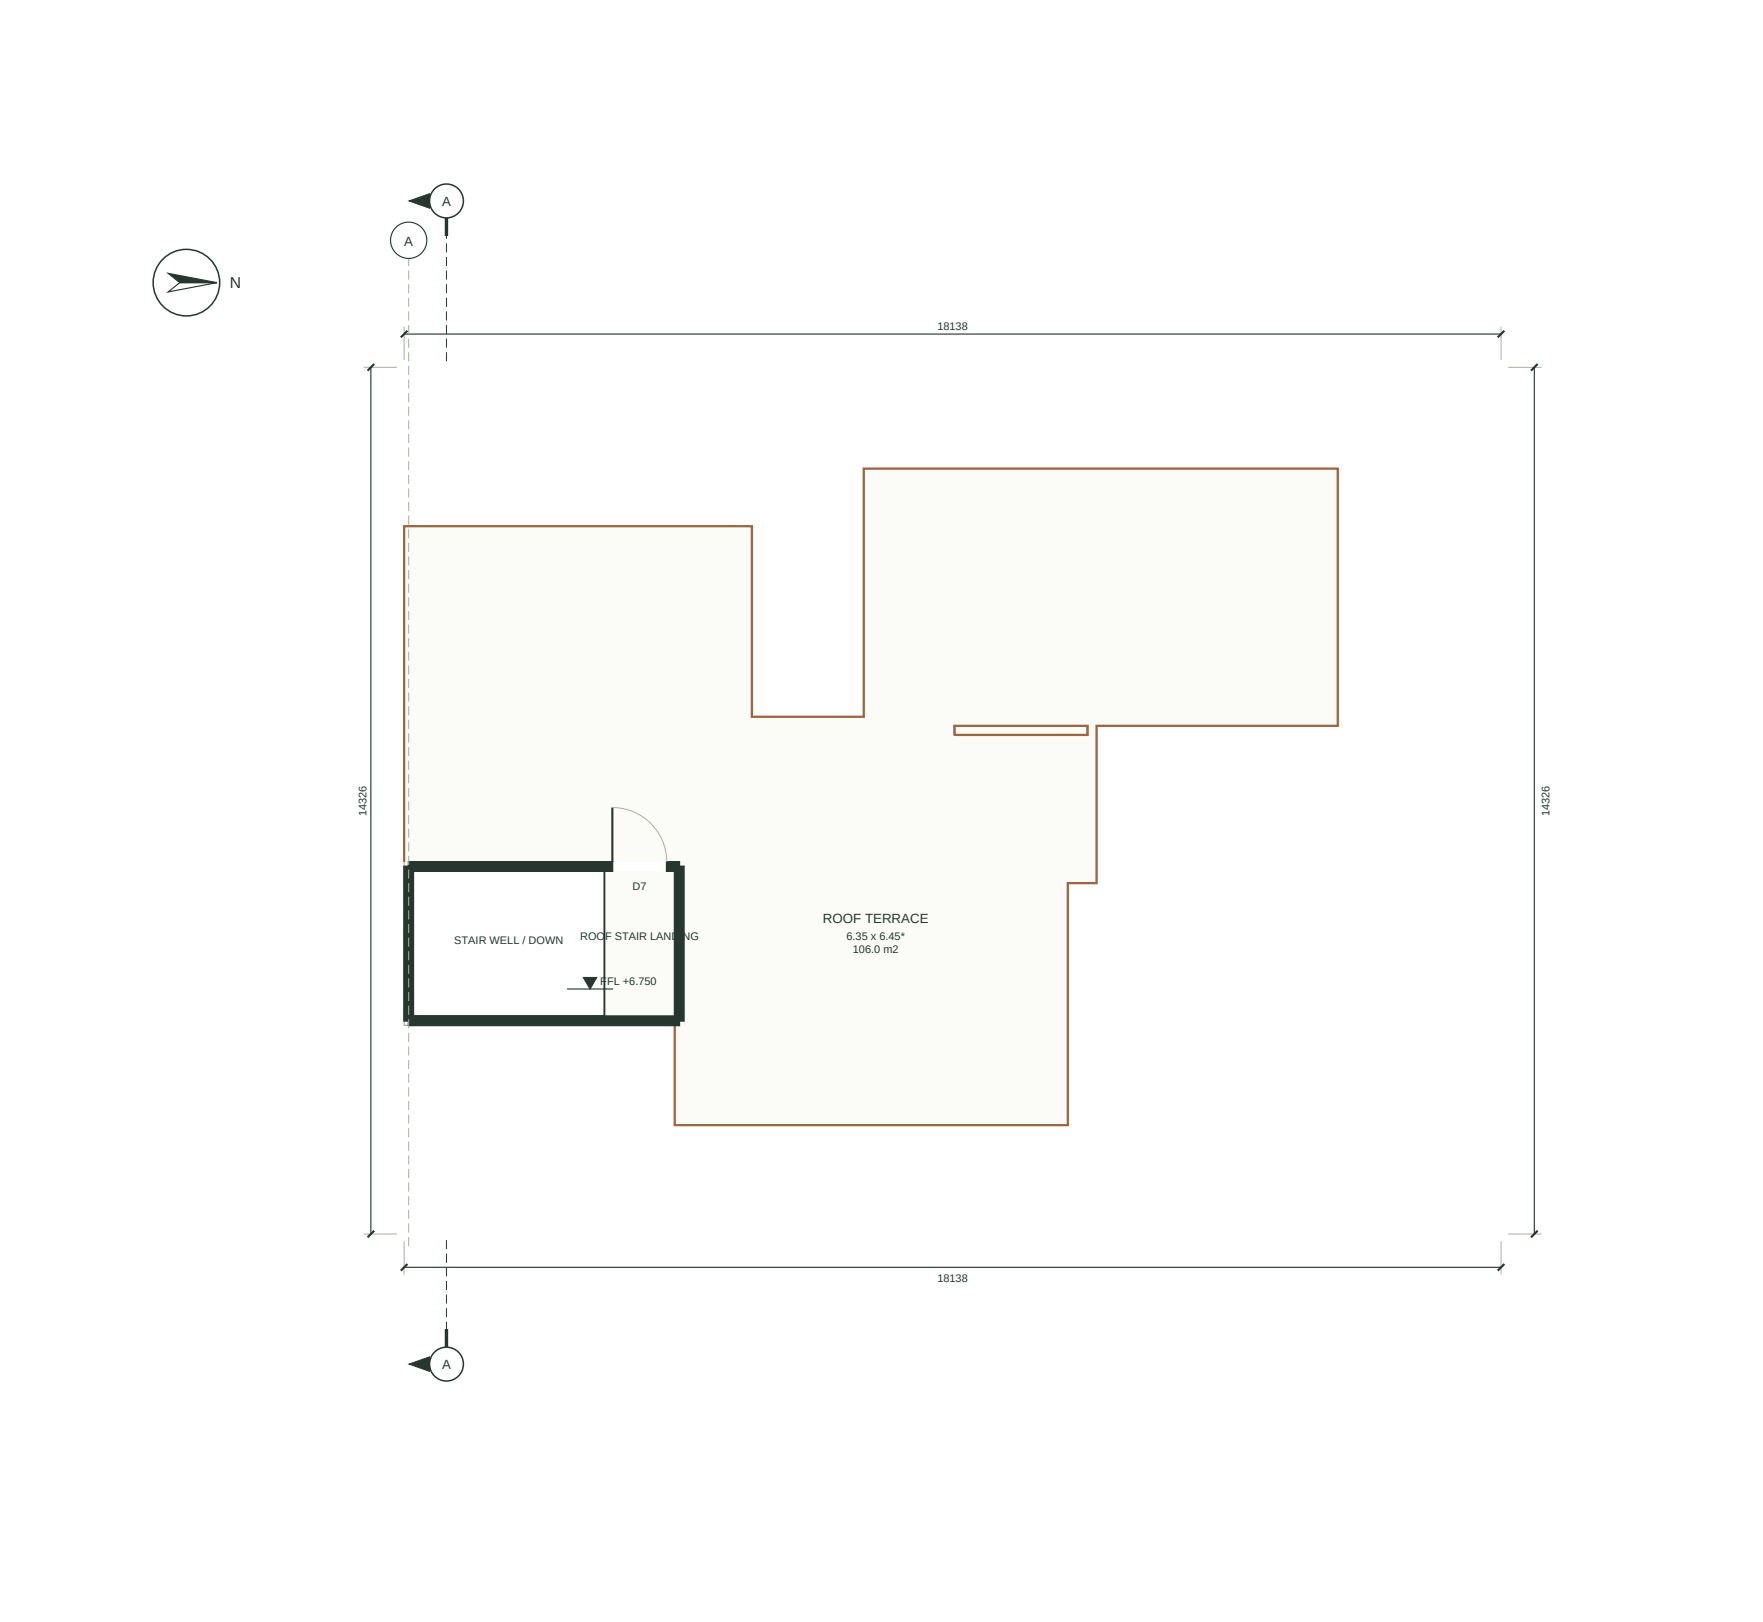

My Desired Home


SPACE	AREA m2
Open roof terrace	106.05

DRAWING NOTES

- Roof access level, not an additional occupied storey.
- Use the linked stair and its landing door to reach the guarded terrace.
- Roof openings and headhouse positions follow the authored stair core.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

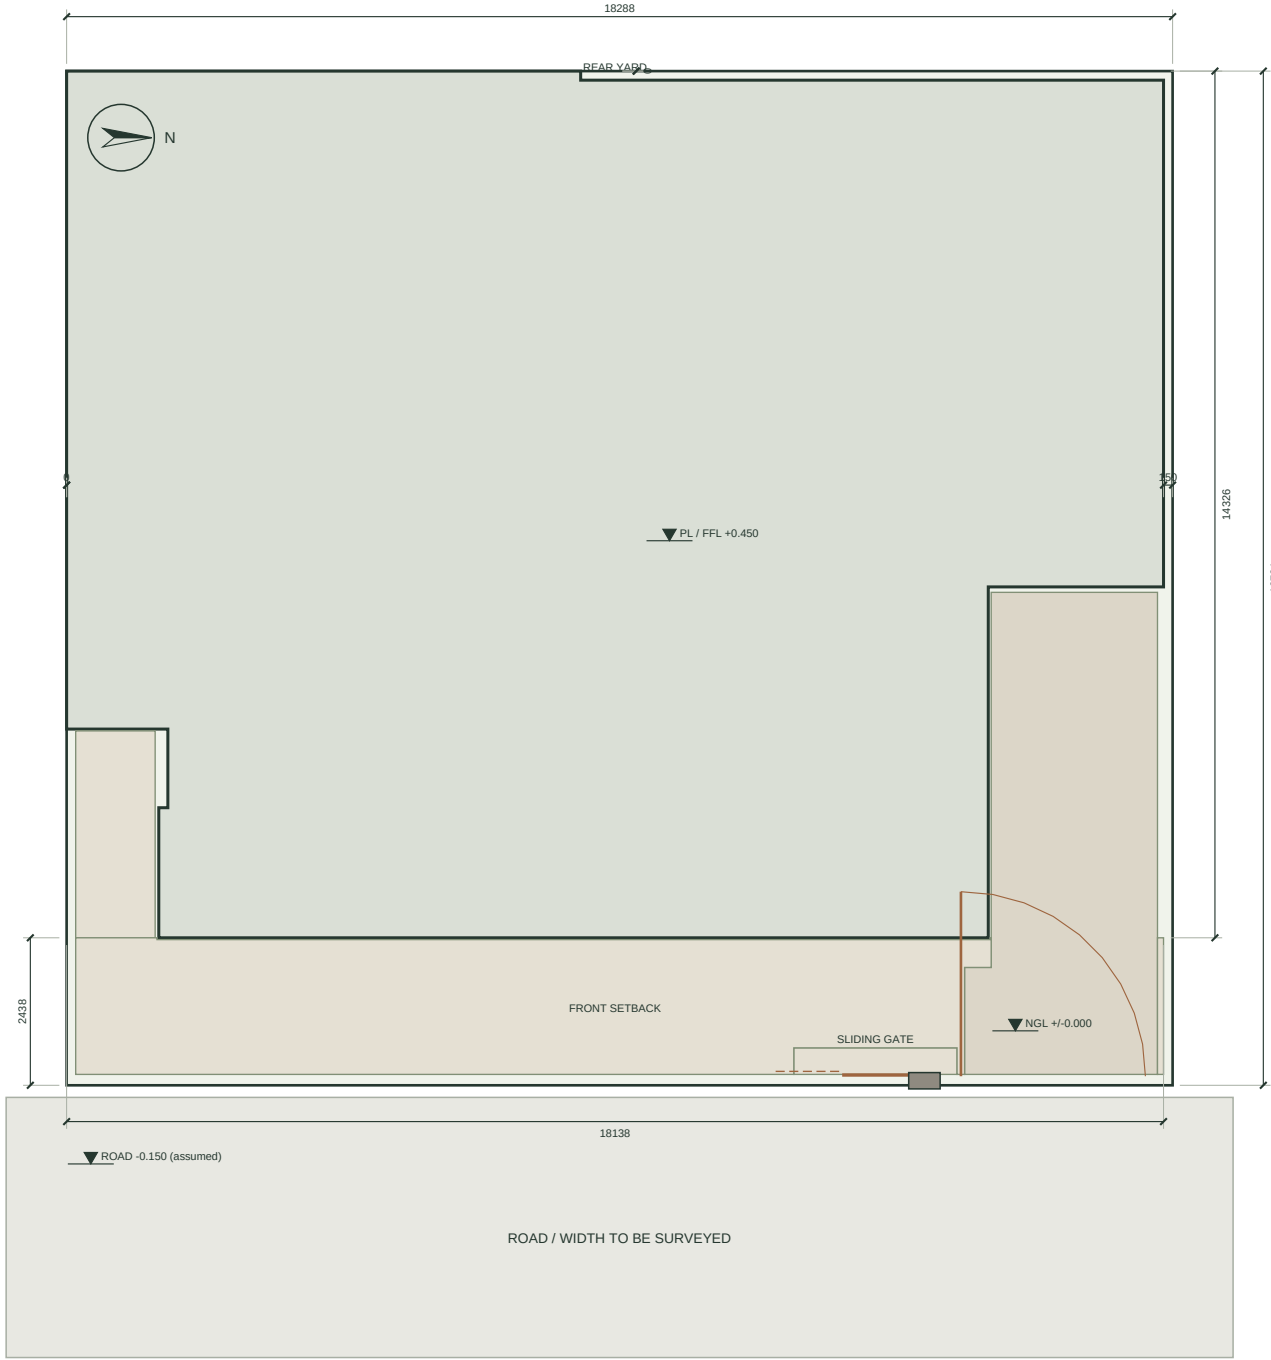

My Desired Home

AREA STATEMENT	VALUE	UNIT
Plot	306.58	m2
Footprint	236.138	m2
Gross floors	422.678	m2
Coverage	77.02	percent
Geometric FAR	1.379	ratio


DRAWING NOTES

- Setbacks shown are design assumptions, not verified bylaws.
- Road width, property line and levels need a survey.
- No surveyed drainage fall or flood datum supplied.
- Default steps are not a step-free route.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Front elevation

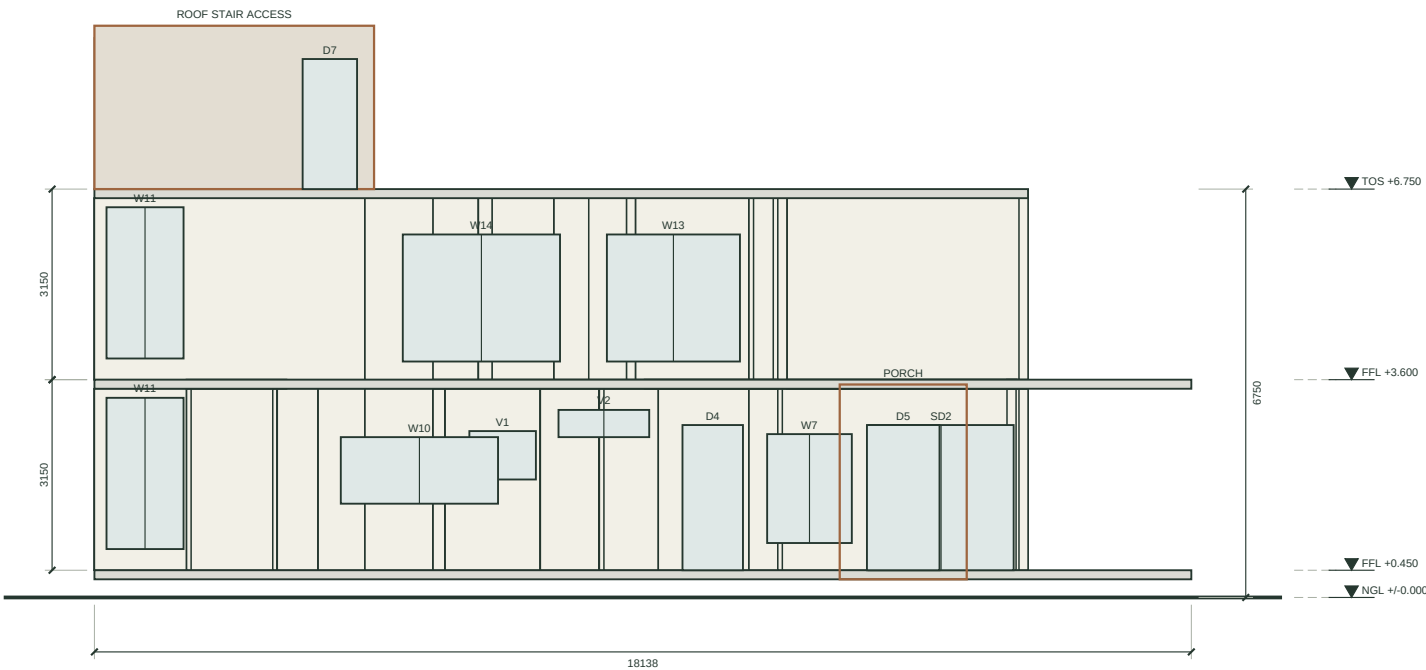

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.


No cladding anchors or construction joints are designed.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.



Rear elevation

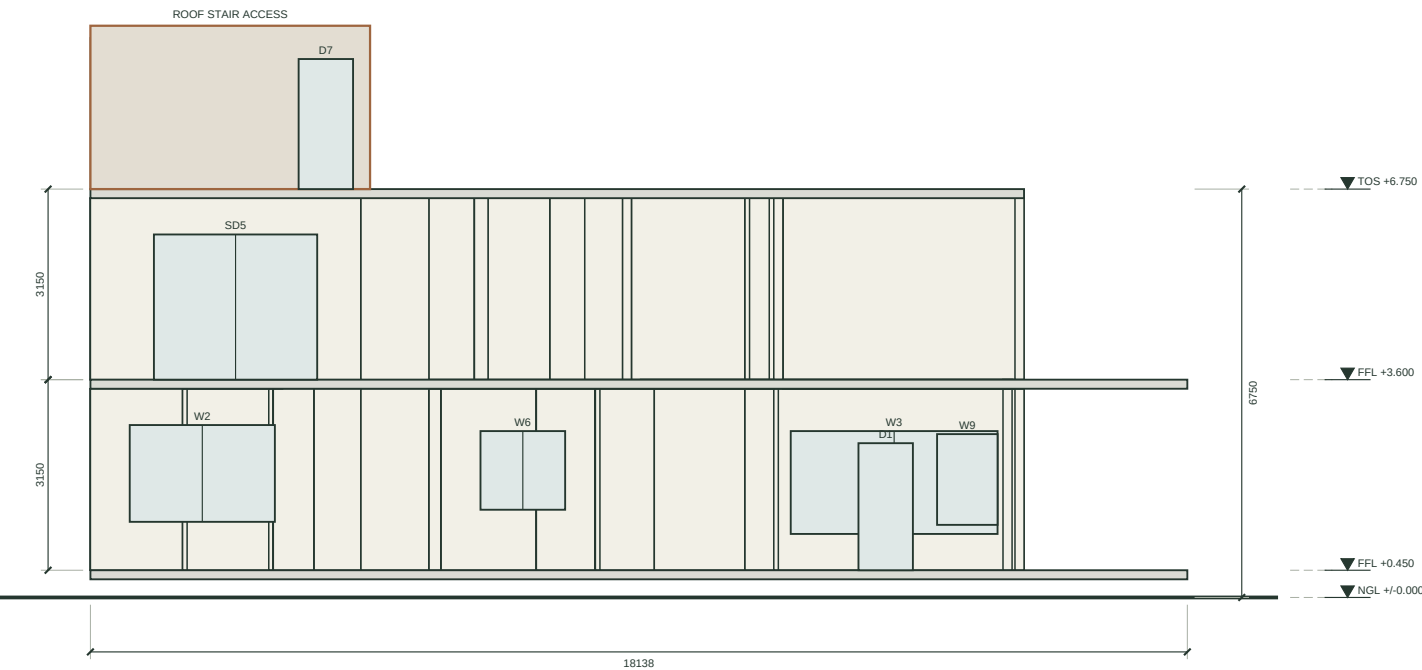

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.


No cladding anchors or construction joints are designed.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.



Left elevation

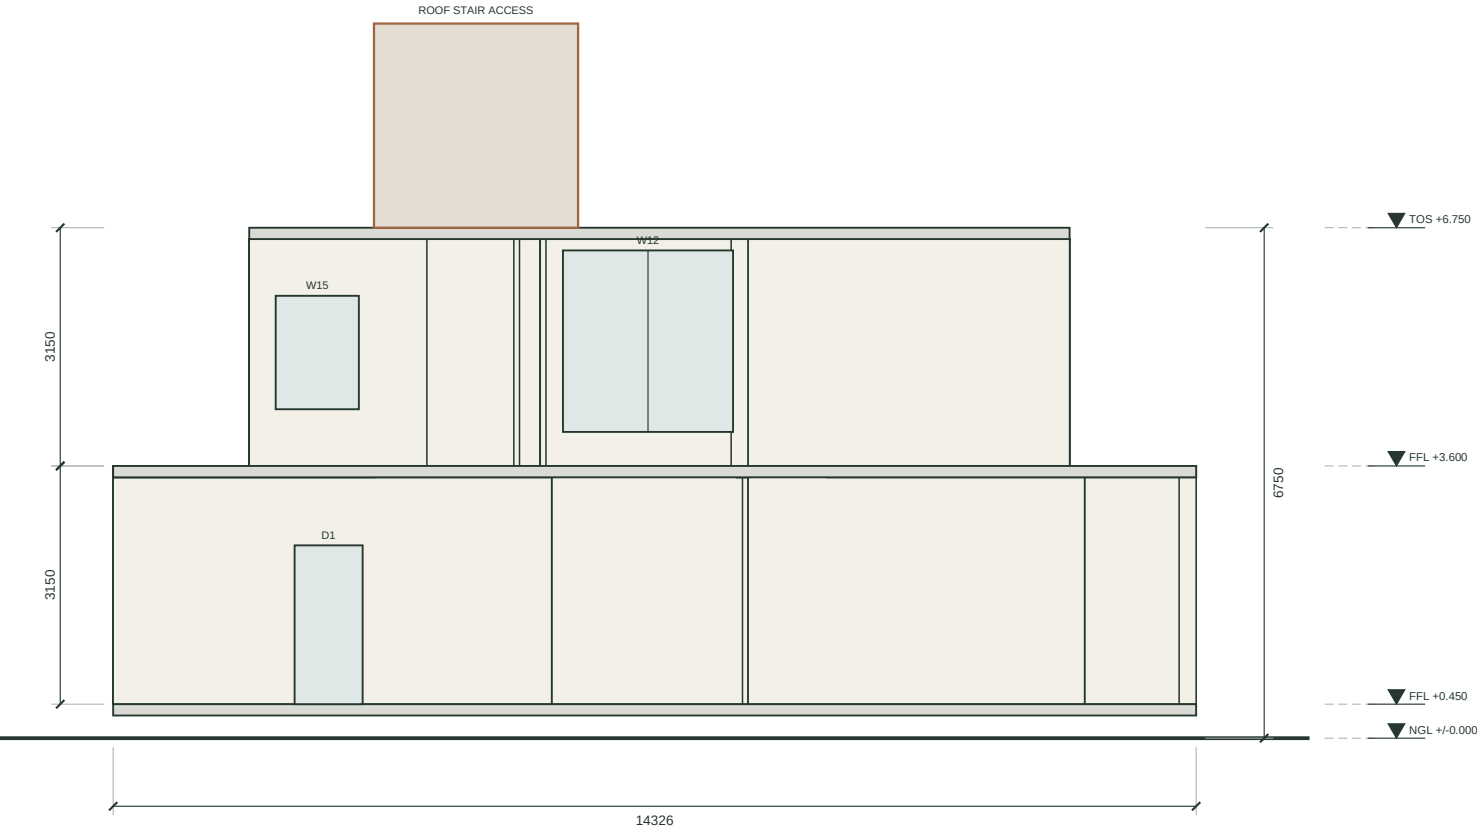

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.


Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Right elevation

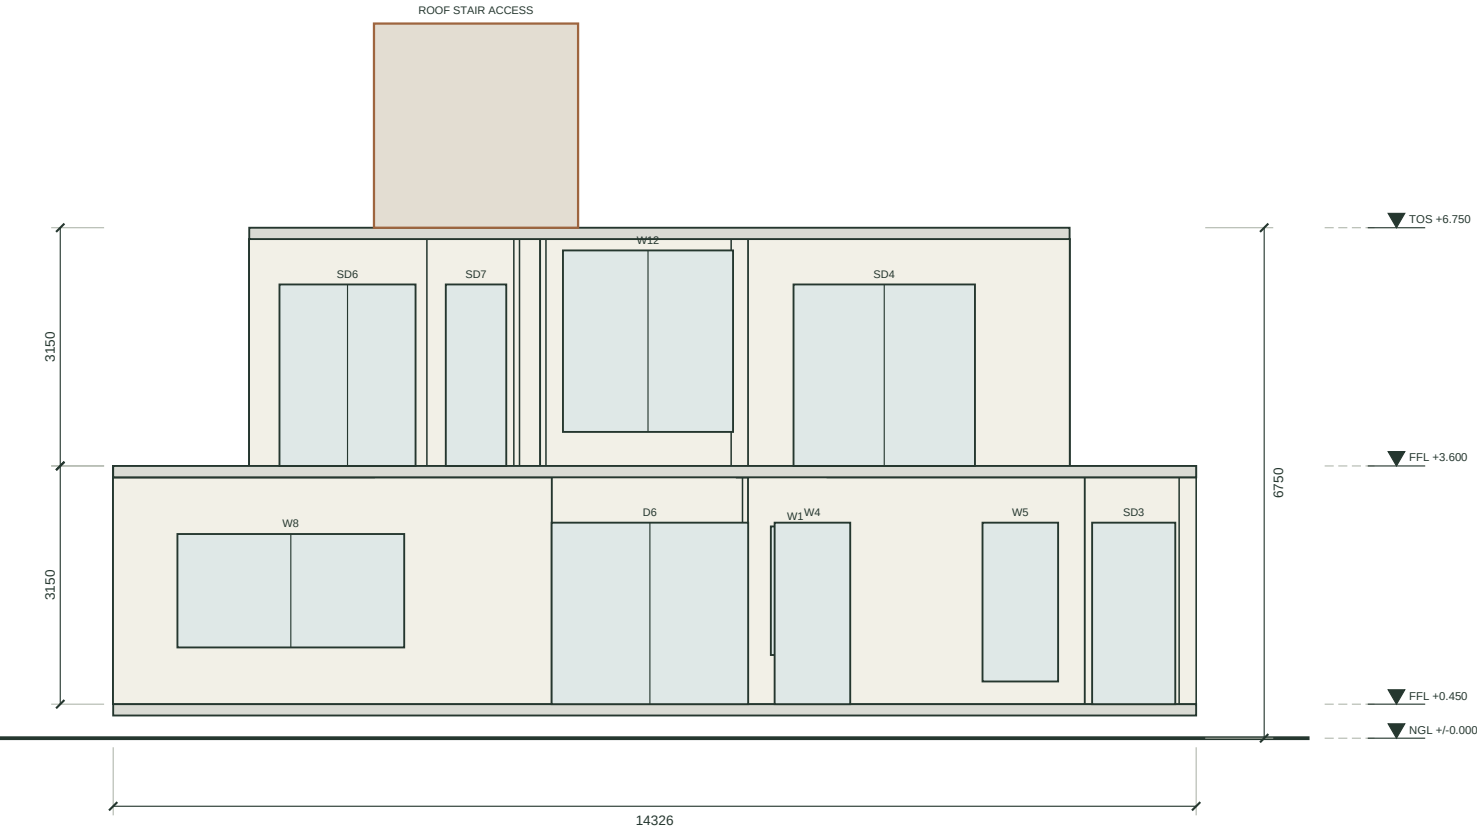

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.


No cladding anchors or construction joints are designed.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.



Section A-A / x = 0.70 m

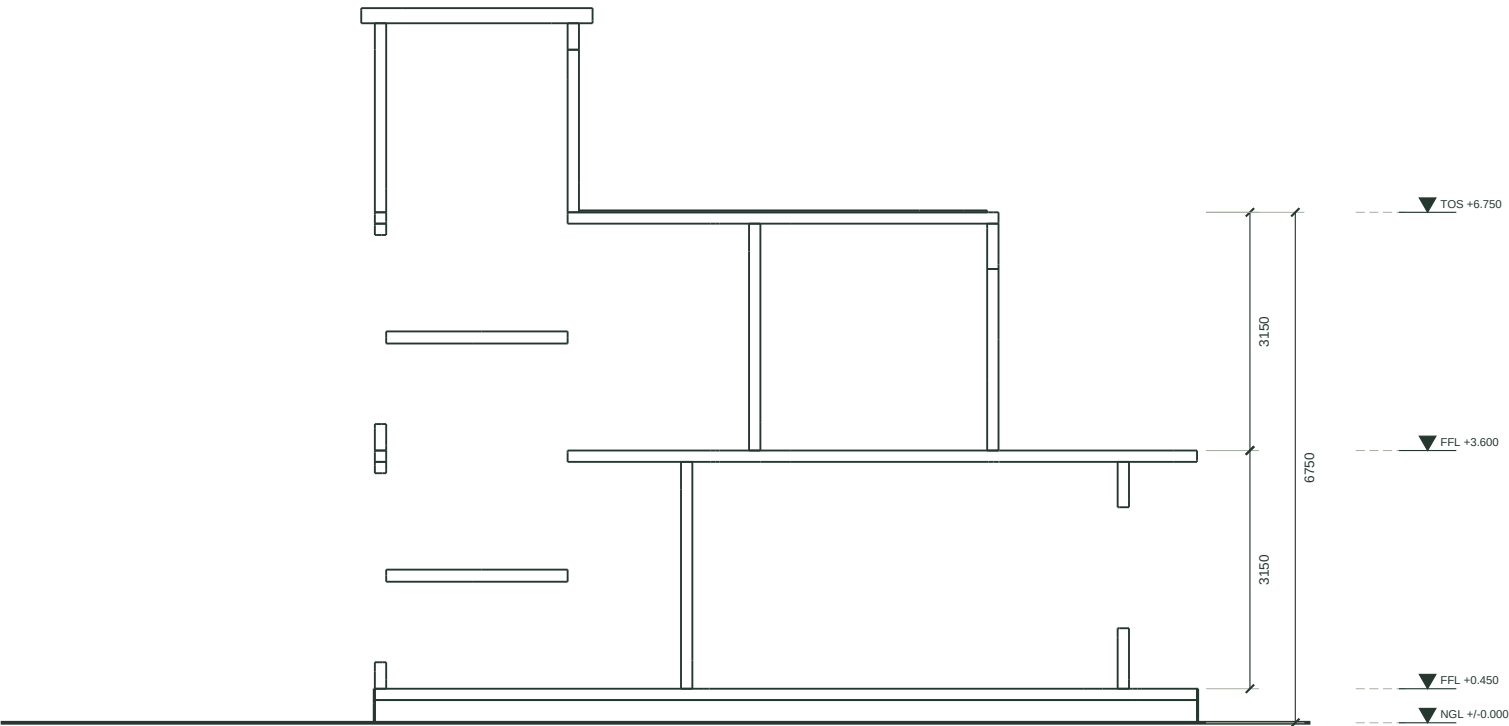

My Desired Home

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.


No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.



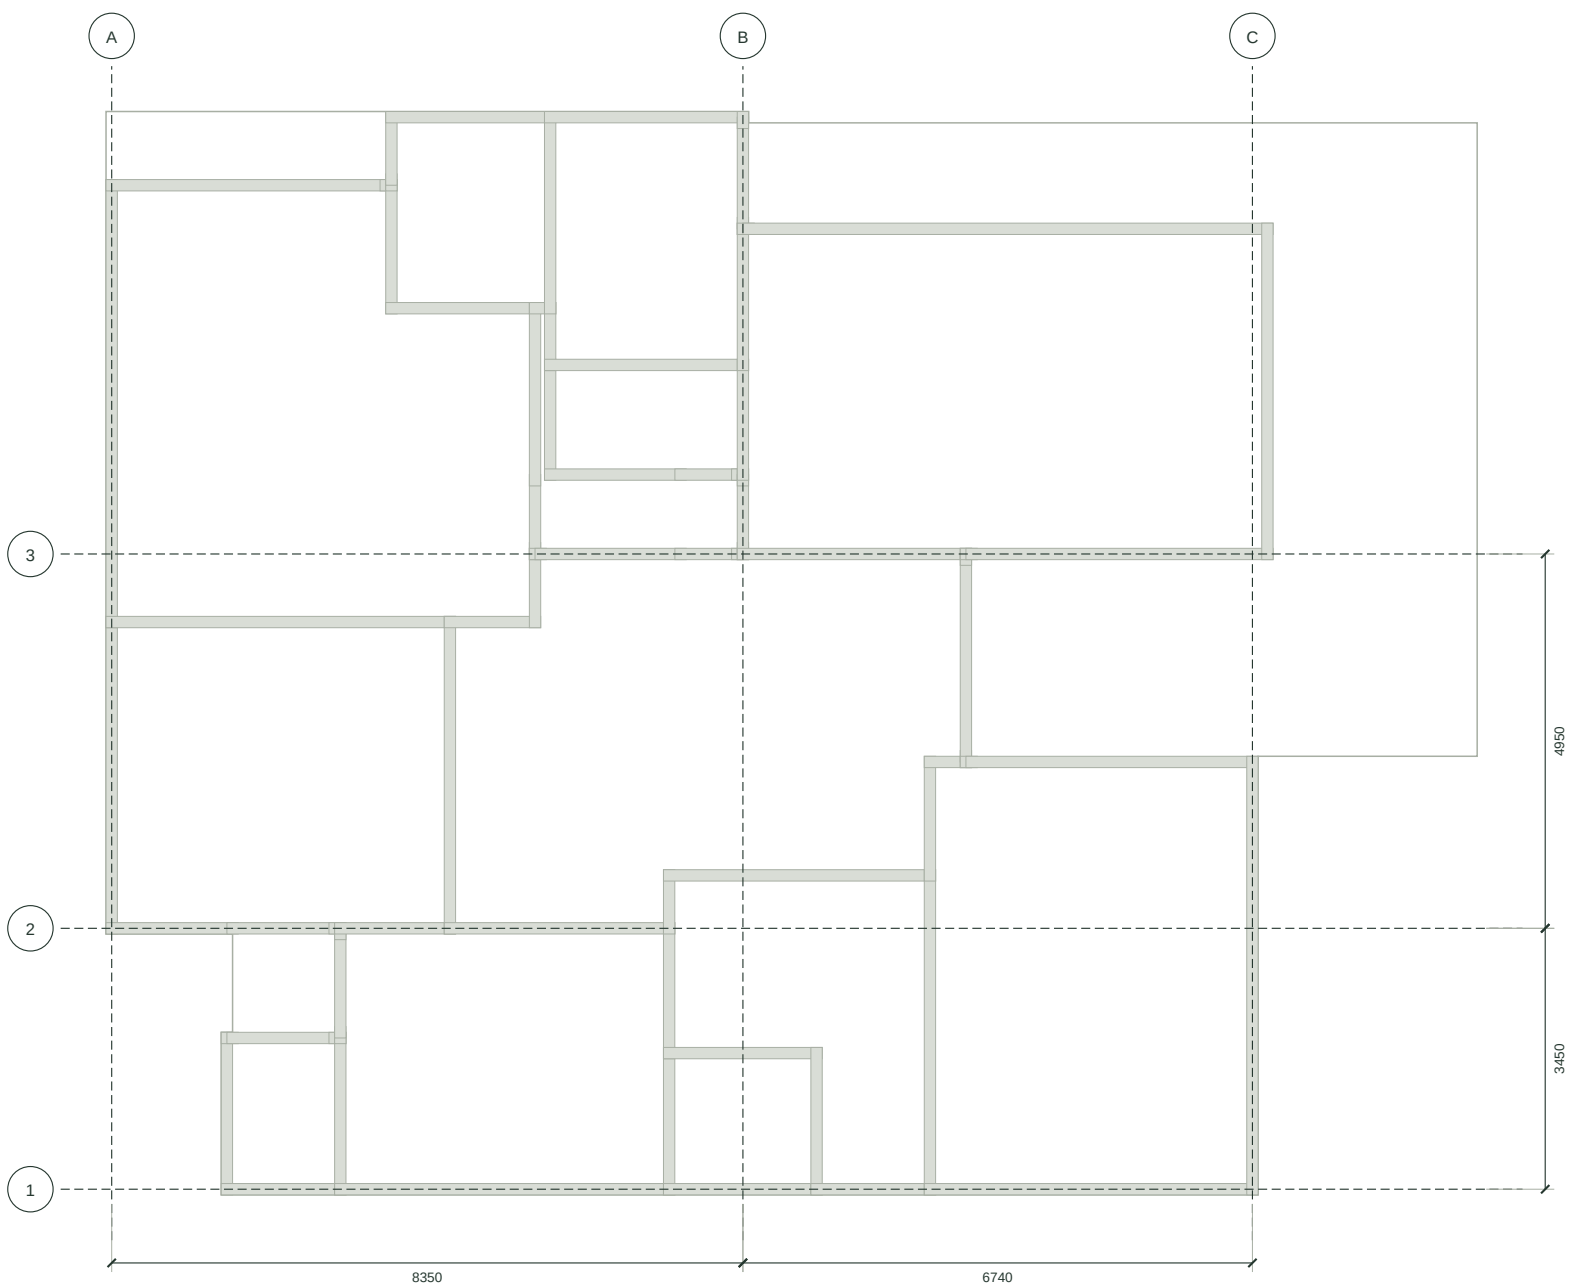

My Desired Home

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

- Passing geometric checks is not evidence of construction safety or statutory compliance.
- Warning: Living and dining hall: the timber door blocks daylight when closed; mesh transmits light only with timber leaves open.
Permanent glazing screening is not satisfied.
- Warning: Master attached bathroom: mechanical exhaust selected; duct route and capacity require design.
- Warning: Caregiver attached toilet: mechanical exhaust selected; duct route and capacity require design.
- Warning: Shared upper bathroom: mechanical exhaust selected; duct route and capacity require design.

FLOORFORGE / COST / SCENARIO

Gross floor area	4549.67 ft2
Illustrative range	INR 100.09 - 140.13 lakh
Owner budget	INR 65.0 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

FLOORFORGE / SITE / SERVICES / STRUCTURE

Soil	unknown
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	47.93 degrees
Vastu score	75 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 12 weeks
Masonry and services	Week 19 + 7 weeks
Finishes and joinery	Week 26 + 8 weeks
Testing and handover	Week 34 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1	x9	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
D2	x2	Flush door, hardwood frame / 1000 x 2100 / sill 0 mm
D3	x1	Flush door, water-resistant (WPC) / 800 x 2100 / sill 0 mm
D4	x1	Flush door, hardwood frame / 1000 x 2400 / sill 0 mm
D5	x1	Main door, solid timber leaf in frame / 1200 x 2400 / sill 0 mm
D6	x1	Flush door, hardwood frame / 2600 x 2400 / sill 0 mm
D7	x1	Flush door, hardwood frame / 900 x 2150 / sill 0 mm
SD1	x1	Sliding glazed door, aluminium / 2650 x 2400 / sill 0 mm
SD2	x1	Two independent sliding leaves, wall-stacking / 2400 x 2400 / sill 0 mm
SD3	x1	Sliding glazed door, aluminium / 1100 x 2400 / sill 0 mm
SD4	x1	Sliding glazed door, aluminium / 2400 x 2400 / sill 0 mm
SD5	x1	Sliding glazed door, aluminium / 2700 x 2400 / sill 0 mm
SD6	x1	Sliding glazed door, aluminium / 1800 x 2400 / sill 0 mm
SD7	x1	Sliding glazed door, aluminium / 800 x 2400 / sill 0 mm
O1	x1	Cased opening, no leaf / 3300 x 3000 / sill 0 mm
O2	x1	Cased opening, no leaf / 850 x 3000 / sill 0 mm
O3	x1	Cased opening, no leaf / 1500 x 3000 / sill 0 mm
O4	x1	Cased opening, no leaf / 1425 x 2700 / sill 0 mm
O5	x1	Cased opening, no leaf / 3900 x 3000 / sill 0 mm
O6	x1	Cased opening, no leaf / 2100 x 3000 / sill 0 mm
O7	x1	Cased opening, no leaf / 1950 x 3000 / sill 0 mm
O8	x1	Cased opening, no leaf / 2000 x 3000 / sill 0 mm
O9	x1	Cased opening, no leaf / 4100 x 3000 / sill 0 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

FLOORFORGE / OPENING SCHEDULE

W1	x1	Sliding window, aluminium / 650 x 1700 / sill 650 mm
W2	x1	Sliding window, aluminium / 2400 x 1600 / sill 800 mm
W3	x1	Sliding window, aluminium / 3420 x 1700 / sill 600 mm
W4	x1	Fixed full-pane glazing, aluminium frame / 1000 x 2400 / sill 0 mm
W5	x1	Sliding window, aluminium / 1000 x 2100 / sill 300 mm
W6	x1	Sliding window, aluminium / 1400 x 1300 / sill 1000 mm
W7	x1	Sliding window, aluminium / 1400 x 1800 / sill 450 mm
W8	x1	Sliding window, aluminium / 3000 x 1500 / sill 750 mm
W9	x1	Sliding window, aluminium / 1000 x 1500 / sill 750 mm
W10	x1	Sliding window, aluminium / 2600 x 1100 / sill 1100 mm
W11	x2	Sliding window, aluminium / 1274 x 2500 / sill 350 mm
W12	x1	Sliding window, aluminium / 2250 x 2400 / sill 450 mm
W13	x1	Sliding window, aluminium / 2200 x 2100 / sill 300 mm
W14	x1	Sliding window, aluminium / 2600 x 2100 / sill 300 mm
W15	x1	Sliding window, aluminium / 1100 x 1500 / sill 750 mm
V1	x1	Ventilator, obscured glass / louvres / 1100 x 800 / sill 1500 mm
V2	x1	Ventilator, obscured glass / louvres / 1500 x 450 / sill 2200 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.