
FLOORFORGE

A-101

Ground floor plan

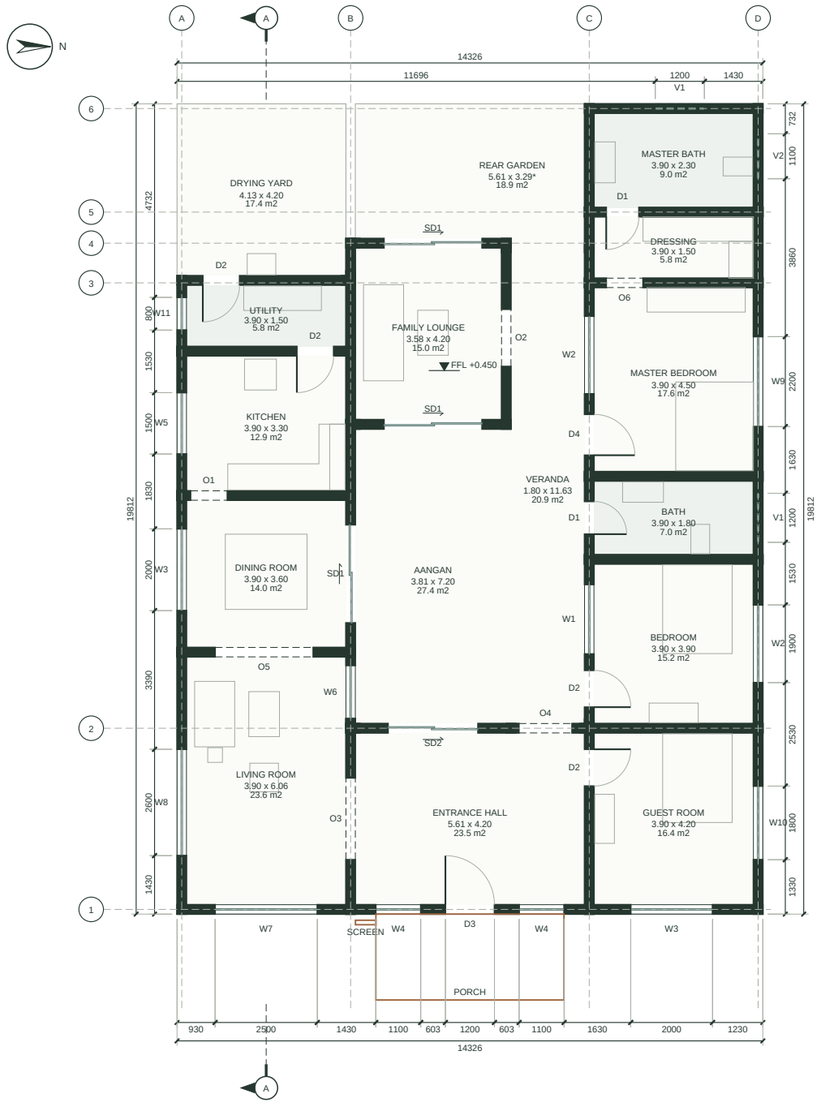

0 m 2 m 4 m

The Aangan House

SPACE	CLEAR SIZE m	AREA m2
Bath	3.90 x 1.80	7.02
Bedroom	3.90 x 3.90	15.21
Aangan	3.81 x 7.20	27.40
Dining room	3.90 x 3.60	14.04
Dressing	3.90 x 1.50	5.85
Family lounge	3.58 x 4.20	15.02
Entrance hall	5.61 x 4.20	23.55
Rear garden	5.61 x 3.29*	18.87
Kitchen	3.90 x 3.30	12.87
Living room	3.90 x 6.06	23.63
Master bedroom	3.90 x 4.50	17.55
Master bath	3.90 x 2.30	8.98
Guest room	3.90 x 4.20	16.38
Utility	3.90 x 1.50	5.85
Veranda	1.80 x 11.63	20.93
Drying yard	4.13 x 4.20	17.35

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:150 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

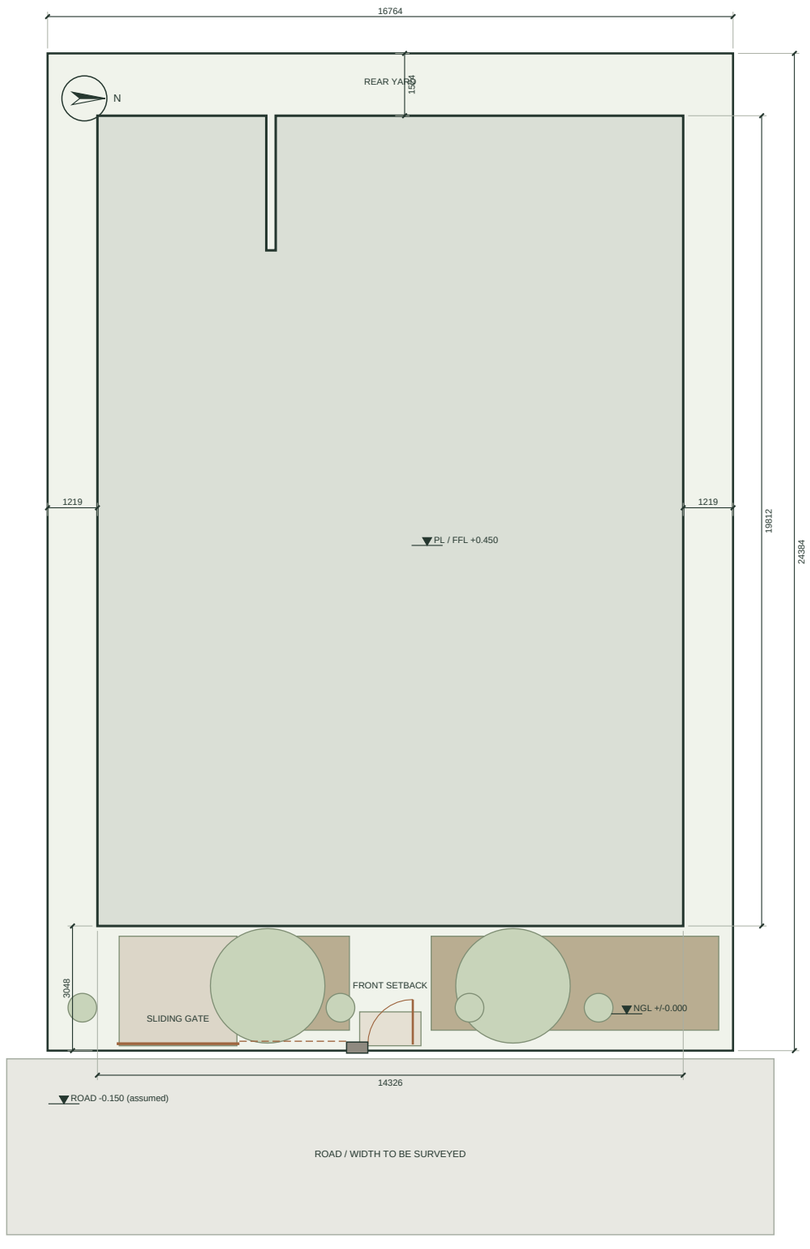

0 m 2 m 4 m

The Aangan House

AREA STATEMENT	VALUE	UNIT
Plot	408.773	m2
Footprint	283.07	m2
Gross floors	283.07	m2
Coverage	69.25	percent
Geometric FAR	0.692	ratio

DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.


SCALE 1:150 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

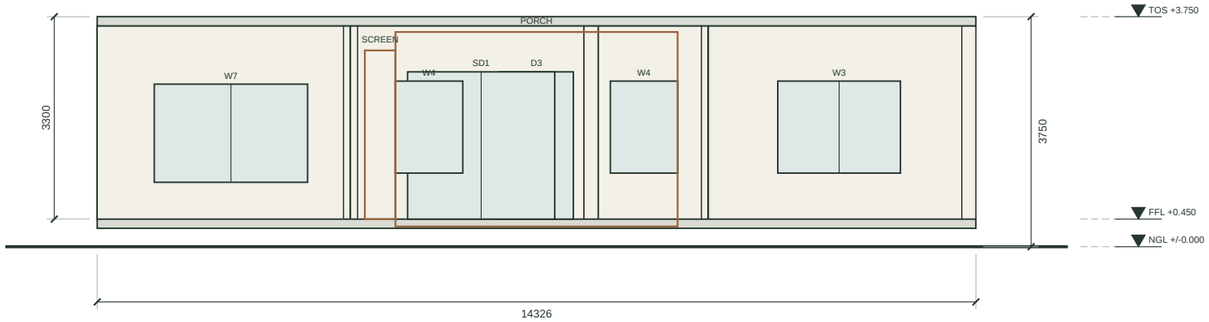

0 m 2 m 4 m

The Aangan House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

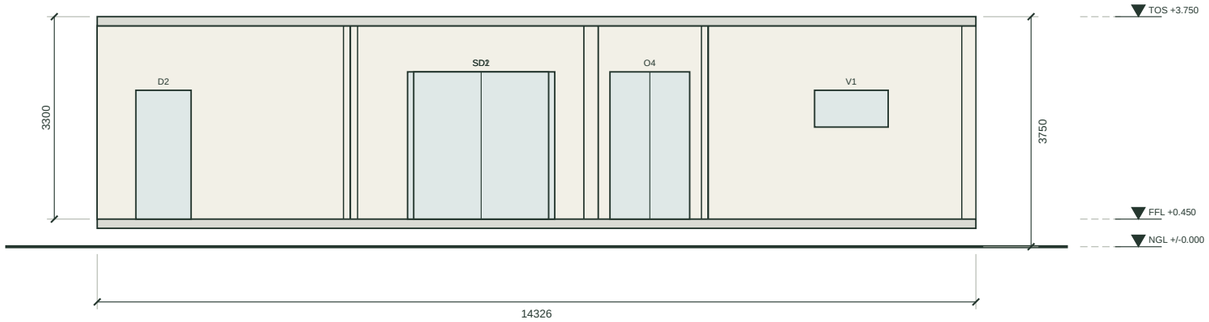

0 m 2 m 4 m

The Aangan House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Left elevation

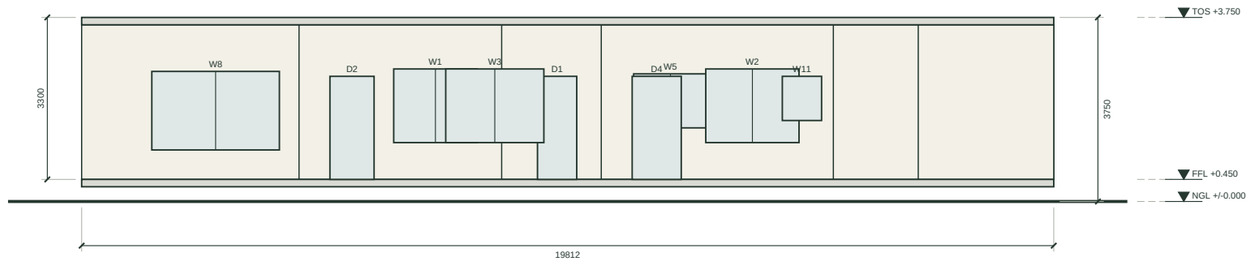

0 m 2 m 4 m

The Aangan House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Right elevation

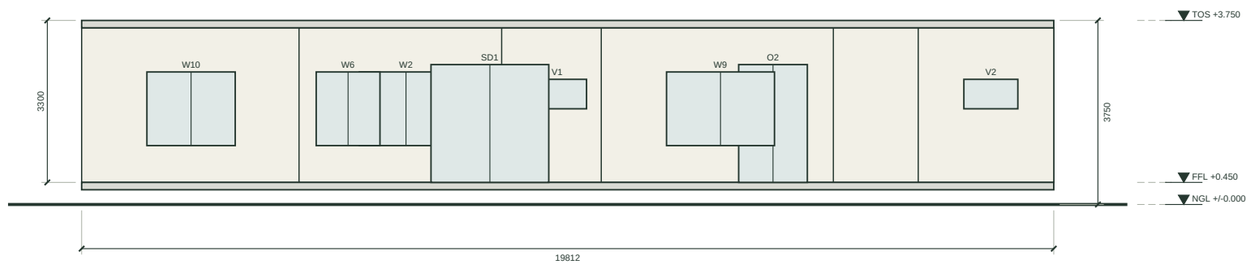

0 m 2 m 4 m

The Aangan House

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Section A-A / x = 2.18 m

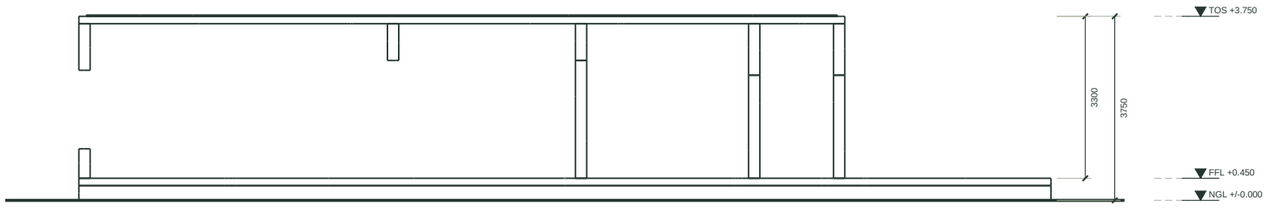

0 m 2 m 4 m

The Aangan House

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Door, window and room schedules

DOOR AND WINDOW SCHEDULE

TAG	DESCRIPTION	SIZE W x H (mm)	SILL	NO.	LOCATION
D1	Flush door, water-resistant (WPC)	800 x 2100	-	2	Bath, Dressing
D2	Flush door, hardwood frame	900 x 2100	-	4	Bedroom, Guest room, Kitchen, Utility
D3	Main door, solid timber leaf in frame	1200 x 2400	-	1	Entrance hall
D4	Flush door, hardwood frame	1000 x 2100	-	1	Master bedroom
SD1	Sliding glazed door, aluminium	2400 x 2400	-	3	Aangan / Dining room +2 more
SD2	Sliding glazed door, aluminium	2200 x 2400	-	1	Aangan / Entrance hall
O1	Cased opening, no leaf	900 x 2400	-	1	Dining room / Kitchen
O2	Cased opening, no leaf	1400 x 2400	-	1	Family lounge / Veranda
O3	Cased opening, no leaf	2000 x 2400	-	1	Entrance hall / Living room
O4	Cased opening, no leaf	1300 x 2400	-	1	Entrance hall / Veranda
O5	Cased opening, no leaf	2400 x 2400	-	1	Dining room / Living room
O6	Cased opening, no leaf	900 x 2100	-	1	Dressing / Master bedroom
W1	Sliding window, aluminium	1700 x 1500	750	1	Bedroom
W2	Sliding window, aluminium	1900 x 1500	750	2	Bedroom, Master bedroom
W3	Sliding window, aluminium	2000 x 1500	750	2	Dining room, Guest room
W4	Sliding window, aluminium	1100 x 1500	750	2	Entrance hall
W5	Sliding window, aluminium	1500 x 1100	1050	1	Kitchen
W6	Sliding window, aluminium	1300 x 1500	750	1	Aangan
W7	Sliding window, aluminium	2500 x 1600	600	1	Living room
W8	Sliding window, aluminium	2600 x 1600	600	1	Living room
W9	Sliding window, aluminium	2200 x 1500	750	1	Master bedroom
W10	Sliding window, aluminium	1800 x 1500	750	1	Guest room
W11	Sliding window, aluminium	800 x 900	1200	1	Utility
V1	Ventilator, obscured glass / louvres	1200 x 600	1500	2	Bath, Master bath
V2	Ventilator, obscured glass / louvres	1100 x 600	1500	1	Master bath

ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

SPACE	FLOOR	CLEAR SIZE (m)	CLEAR SIZE (ft-in)	AREA m2	AREA ft2
Bath	Ground	3.90 x 1.80	12'10" x 5'11"	7.02	76
Bedroom	Ground	3.90 x 3.90	12'10" x 12'10"	15.21	164
Aangan	Ground	3.81 x 7.20	12'6" x 23'7"	27.40	295
Dining room	Ground	3.90 x 3.60	12'10" x 11'10"	14.04	151
Dressing	Ground	3.90 x 1.50	12'10" x 4'11"	5.85	63
Family lounge	Ground	3.58 x 4.20	11'9" x 13'9"	15.02	162
Entrance hall	Ground	5.61 x 4.20	18'5" x 13'9"	23.55	253
Rear garden	Ground	5.61 x 3.29	18'5" x 10'10"	18.87	203
Kitchen	Ground	3.90 x 3.30	12'10" x 10'10"	12.87	139
Living room	Ground	3.90 x 6.06	12'10" x 19'11"	23.63	254
Master bedroom	Ground	3.90 x 4.50	12'10" x 14'9"	17.55	189
Master bath	Ground	3.90 x 2.30	12'10" x 7'7"	8.98	97
Guest room	Ground	3.90 x 4.20	12'10" x 13'9"	16.38	176
Utility	Ground	3.90 x 1.50	12'10" x 4'11"	5.85	63
Veranda	Ground	1.80 x 11.63	5'11" x 38'2"	20.93	225
Drying yard	Ground	4.13 x 4.20	13'7" x 13'9"	17.35	187


Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Coordination axes / NOT a structural design

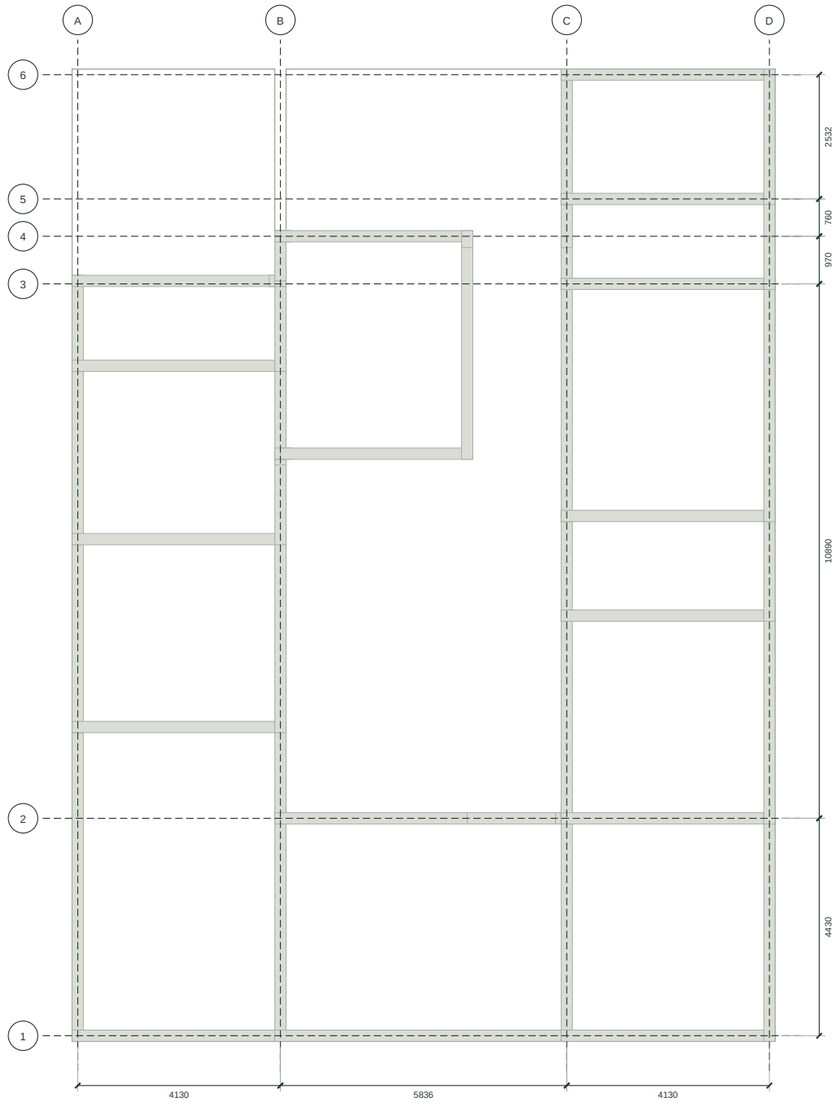

0 m 2 m 4 m

The Aangan House

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

Passing geometric checks is not evidence of construction safety or statutory compliance.

FLOORFORGE / COST / SCENARIO

Gross floor area	3046.94 ft2
Illustrative range	INR 67.03 - 93.85 lakh
Owner budget	INR 65.0 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

FLOORFORGE / SITE / SERVICES / STRUCTURE

Soil	unknown
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	26.41 degrees
Vastu score	8 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 6 weeks
Masonry and services	Week 15 + 7 weeks
Finishes and joinery	Week 22 + 8 weeks
Testing and handover	Week 30 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1 x2	Flush door, water-resistant (WPC) / 800 x 2100 / sill 0 mm
D2 x4	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
D3 x1	Main door, solid timber leaf in frame / 1200 x 2400 / sill 0 mm
D4 x1	Flush door, hardwood frame / 1000 x 2100 / sill 0 mm
SD1 x3	Sliding glazed door, aluminium / 2400 x 2400 / sill 0 mm
SD2 x1	Sliding glazed door, aluminium / 2200 x 2400 / sill 0 mm
O1 x1	Cased opening, no leaf / 900 x 2400 / sill 0 mm
O2 x1	Cased opening, no leaf / 1400 x 2400 / sill 0 mm
O3 x1	Cased opening, no leaf / 2000 x 2400 / sill 0 mm
O4 x1	Cased opening, no leaf / 1300 x 2400 / sill 0 mm
O5 x1	Cased opening, no leaf / 2400 x 2400 / sill 0 mm
O6 x1	Cased opening, no leaf / 900 x 2100 / sill 0 mm
W1 x1	Sliding window, aluminium / 1700 x 1500 / sill 750 mm
W2 x2	Sliding window, aluminium / 1900 x 1500 / sill 750 mm
W3 x2	Sliding window, aluminium / 2000 x 1500 / sill 750 mm
W4 x2	Sliding window, aluminium / 1100 x 1500 / sill 750 mm
W5 x1	Sliding window, aluminium / 1500 x 1100 / sill 1050 mm
W6 x1	Sliding window, aluminium / 1300 x 1500 / sill 750 mm
W7 x1	Sliding window, aluminium / 2500 x 1600 / sill 600 mm
W8 x1	Sliding window, aluminium / 2600 x 1600 / sill 600 mm
W9 x1	Sliding window, aluminium / 2200 x 1500 / sill 750 mm
W10 x1	Sliding window, aluminium / 1800 x 1500 / sill 750 mm
W11 x1	Sliding window, aluminium / 800 x 900 / sill 1200 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

FLOORFORGE / OPENING SCHEDULE

V1 x2	Ventilator, obscured glass / louvres / 1200 x 600 / sill 1500 mm
V2 x1	Ventilator, obscured glass / louvres / 1100 x 600 / sill 1500 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION