
FLOORFORGE

A-101

Ground floor plan

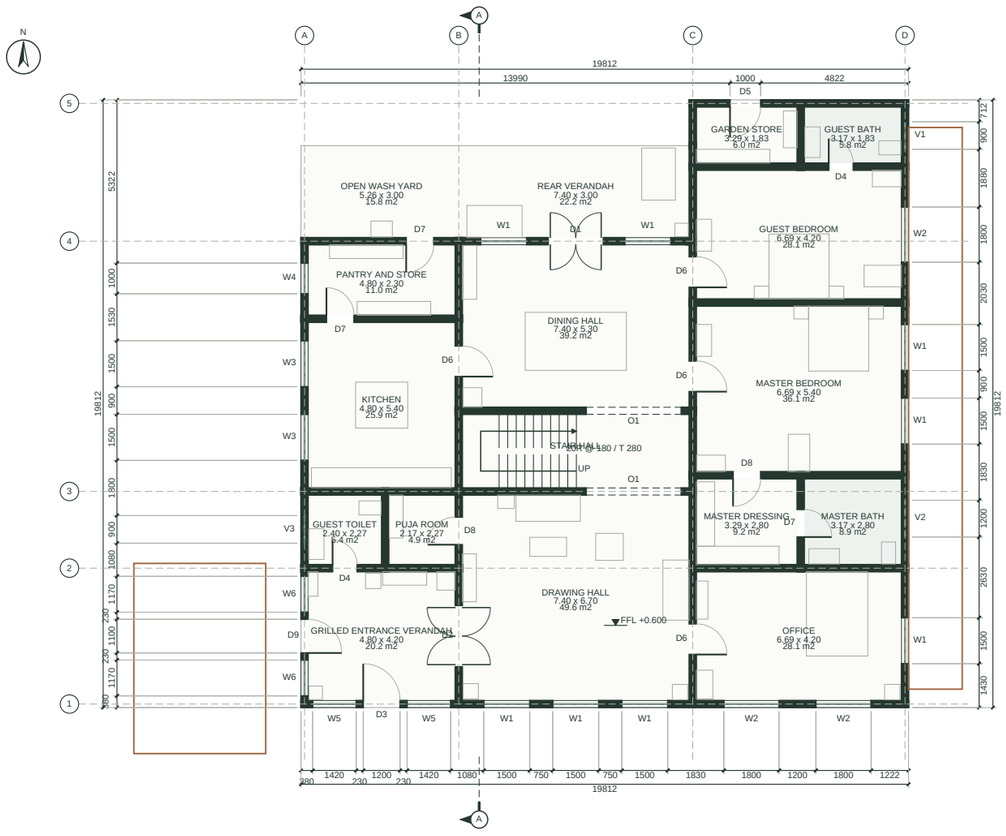

0 m 2 m 4 m

The Bungalow

SPACE	CLEAR SIZE m	AREA m2
Dining hall	7.40 x 5.30	39.22
Drawing hall	7.40 x 6.70	49.58
Guest bath	3.17 x 1.83	5.81
Garden store	3.29 x 1.83	6.03
Guest bedroom	6.69 x 4.20	28.11
Kitchen	4.80 x 5.40	25.92
Master bedroom	6.69 x 5.40	36.14
Master bath	3.17 x 2.80	8.88
Master dressing	3.29 x 2.80	9.21
Office	6.69 x 4.20	28.11
Pantry and store	4.80 x 2.30	11.04
Guest toilet	2.40 x 2.27	5.45
Puja room	2.17 x 2.27	4.93
Rear verandah	7.40 x 3.00	22.20
Grilled entrance verandah	4.80 x 4.20	20.16
Open wash yard	5.26 x 3.00	15.78

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:200 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

First floor plan

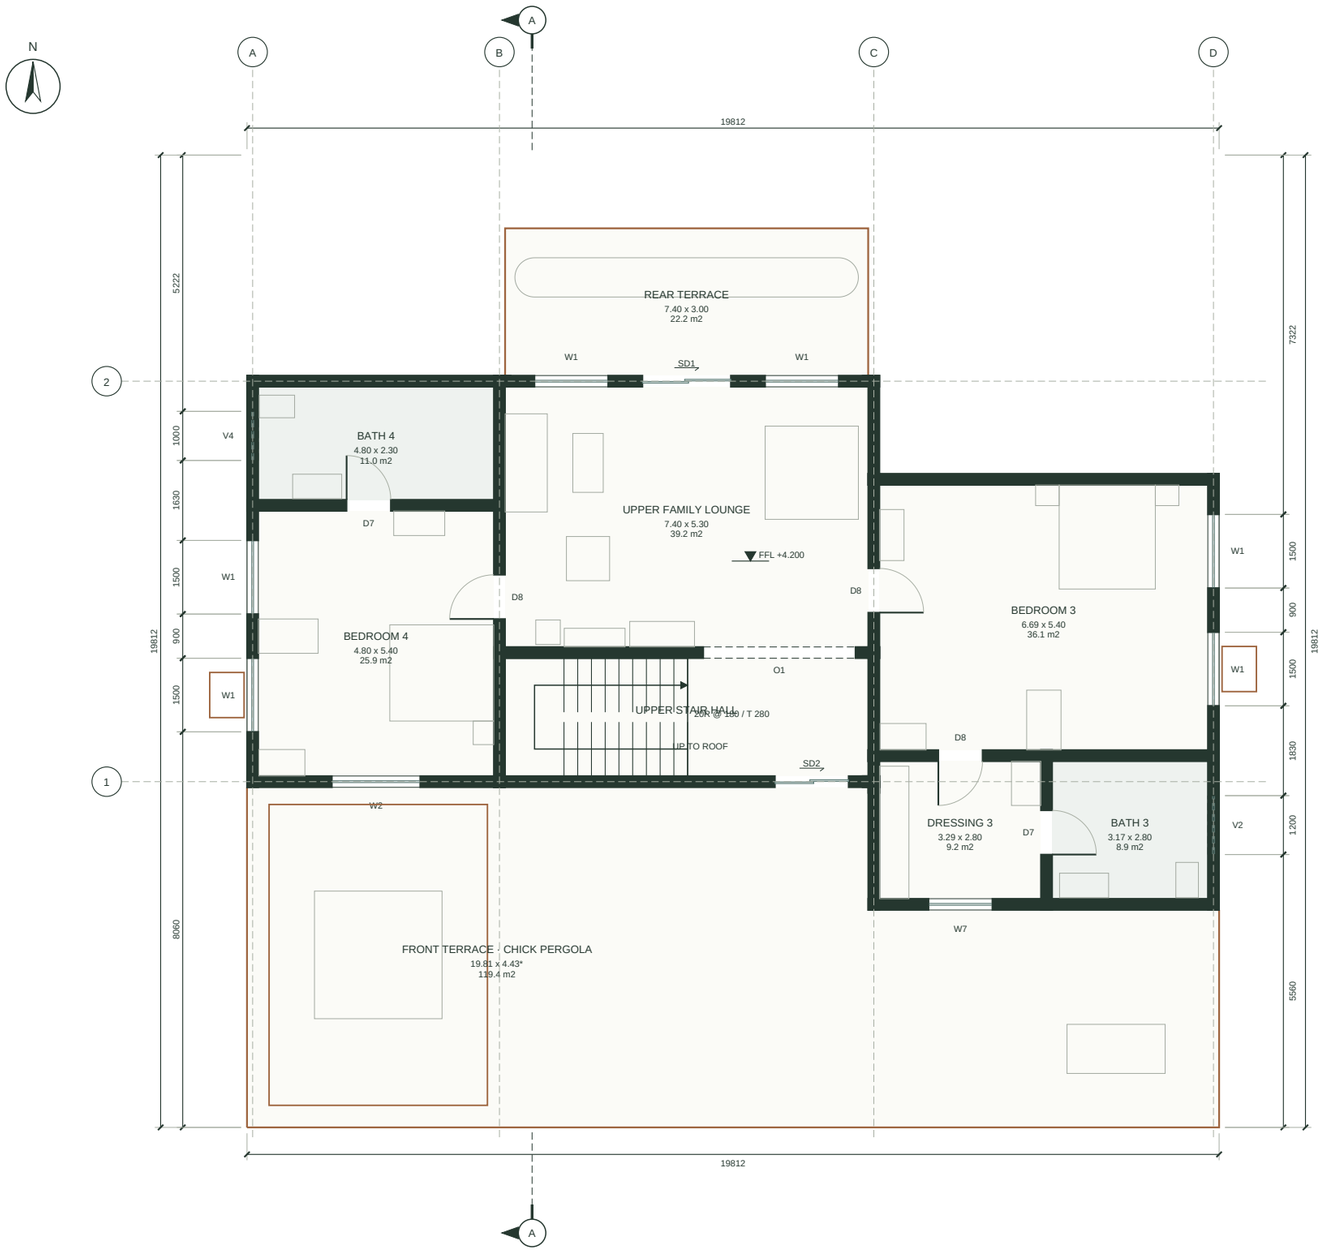

The Bungalow

SPACE	CLEAR SIZE m	AREA m2
Bath 3	3.17 x 2.80	8.88
Bath 4	4.80 x 2.30	11.04
Bedroom 3	6.69 x 5.40	36.14
Bedroom 4	4.80 x 5.40	25.92
Dressing 3	3.29 x 2.80	9.21
Front terrace · chick pergola	19.81 x 4.43*	119.42
Upper family lounge	7.40 x 5.30	39.22
Rear terrace	7.40 x 3.00	22.20

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Roof terrace and stair access

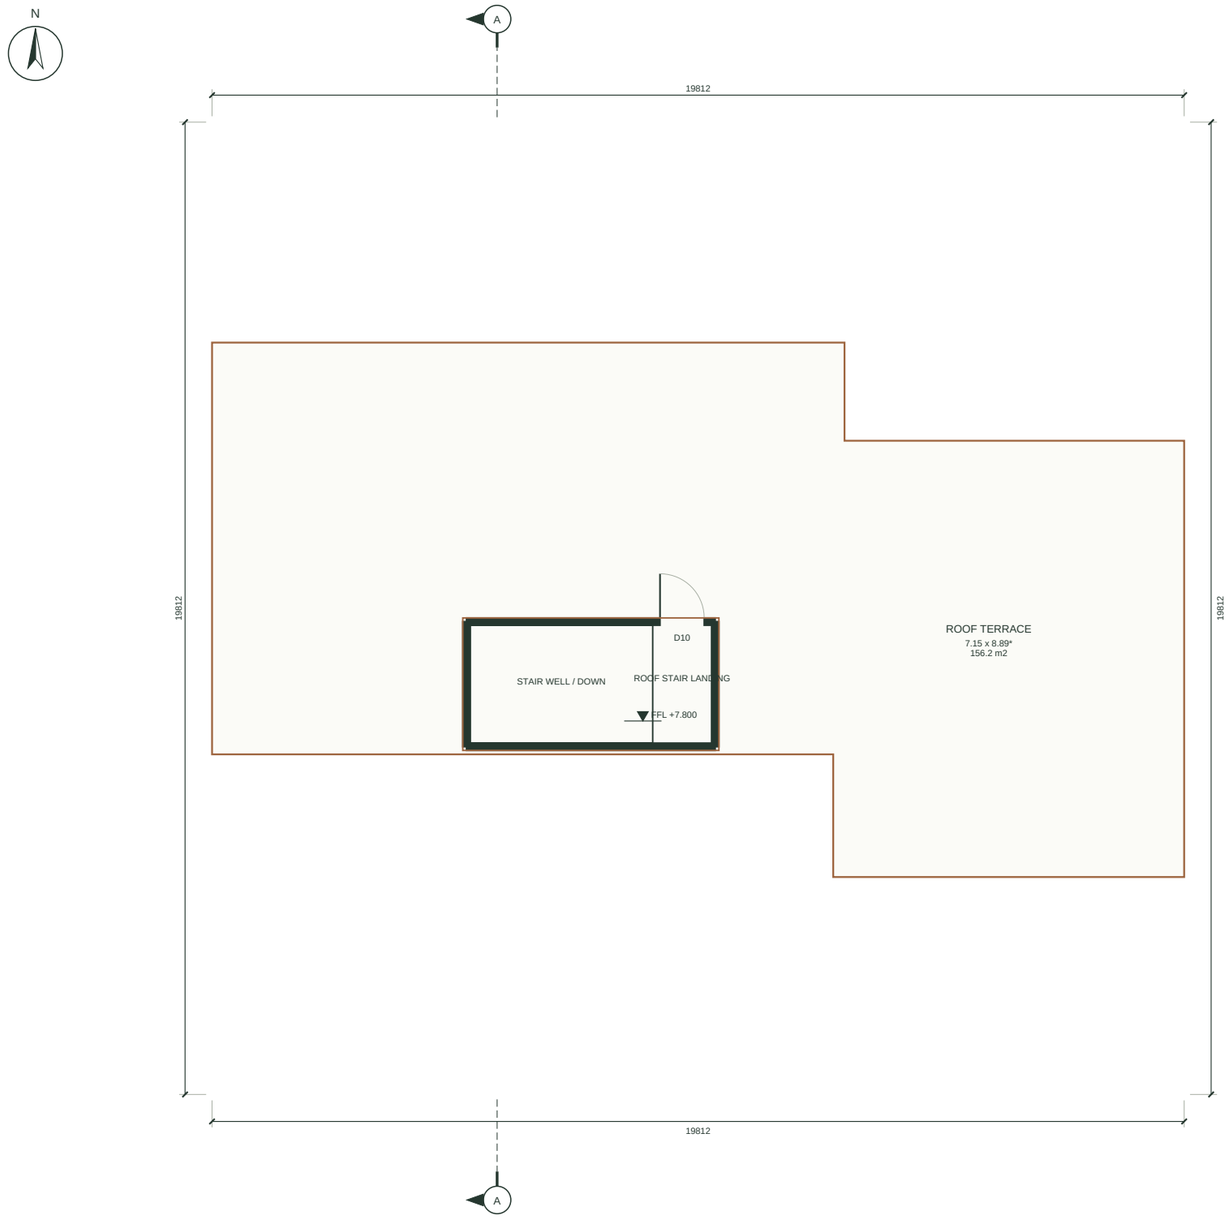

The Bungalow

SPACE	AREA m2
Open roof terrace	156.16

DRAWING NOTES

Roof access level, not an additional occupied storey.

Use the linked stair and its landing door to reach the guarded terrace.

Roof openings and headhouse positions follow the authored stair core.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

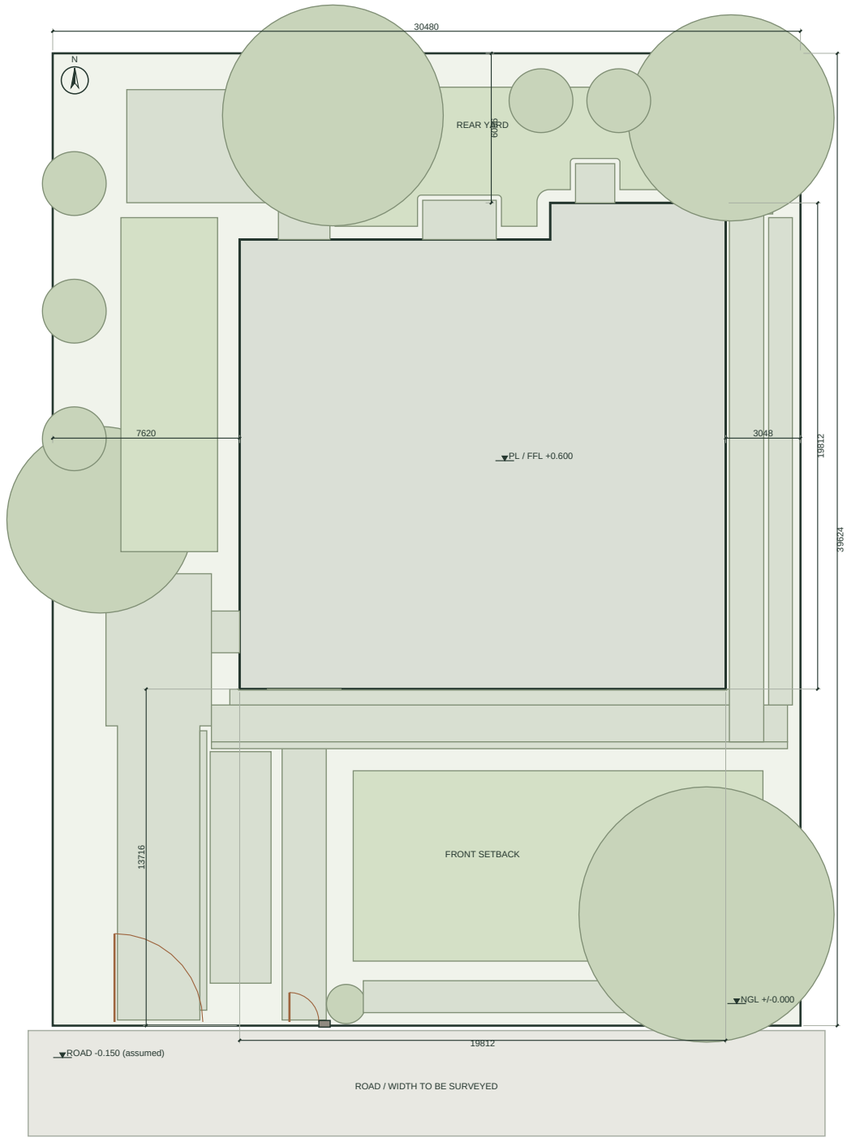

0 m 2 m 4 m

The Bungalow

AREA STATEMENT	VALUE	UNIT
Plot	1207.74	m2
Footprint	373.627	m2
Gross floors	676.574	m2
Coverage	30.94	percent
Geometric FAR	0.56	ratio

DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.


SCALE 1:250 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

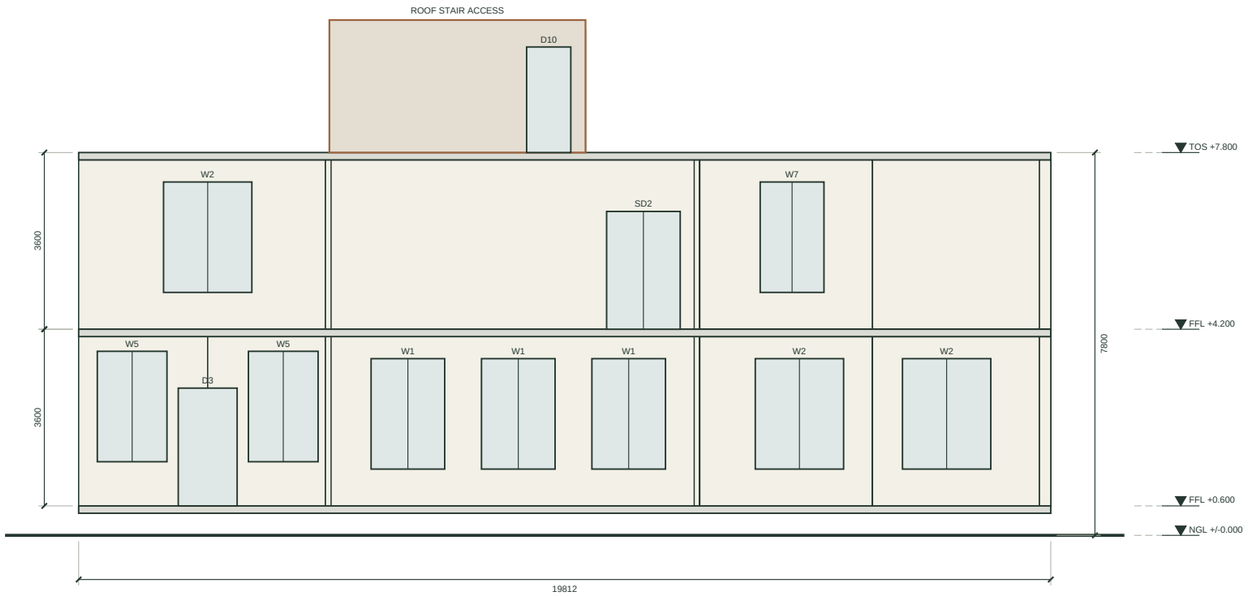

0 m 2 m 4 m

The Bungalow

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

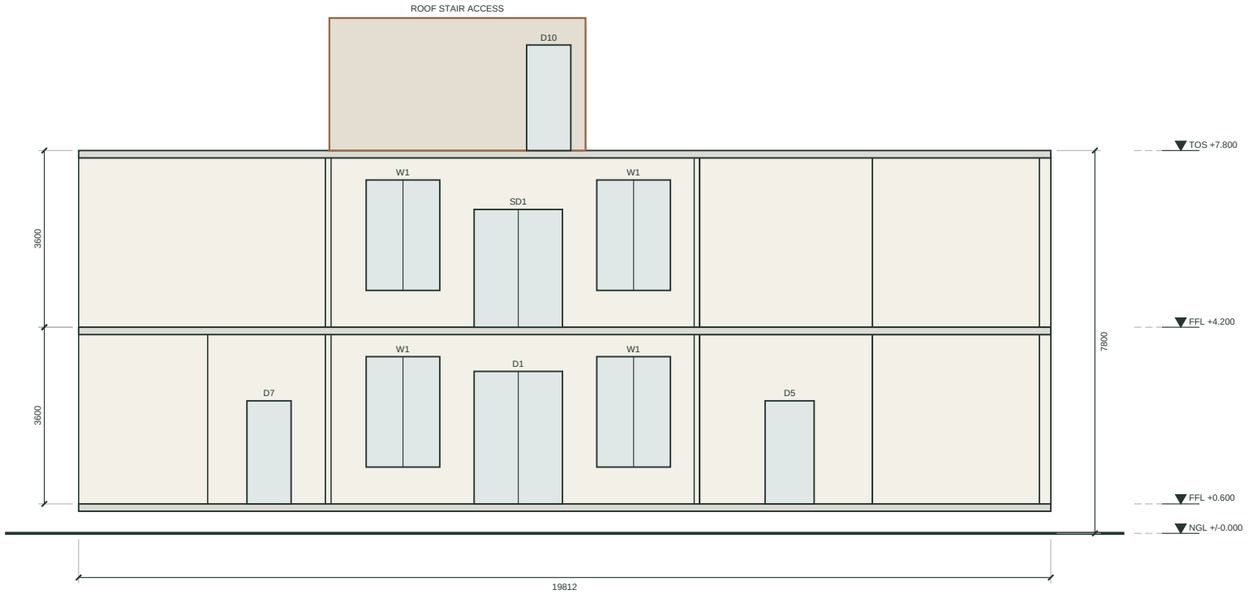

0 m 2 m 4 m

The Bungalow

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

FLOORFORGE

A-203

Left elevation

The Bungalow

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:1000 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

0 2 4 m

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

FLOORFORGE

A-204

Right elevation

The Bungalow

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:1000 AT A3 / CUT +1200 mm


Dimensions govern; do not scale from a screen.

0 2 4 m

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Section A-A / x = 5.81 m

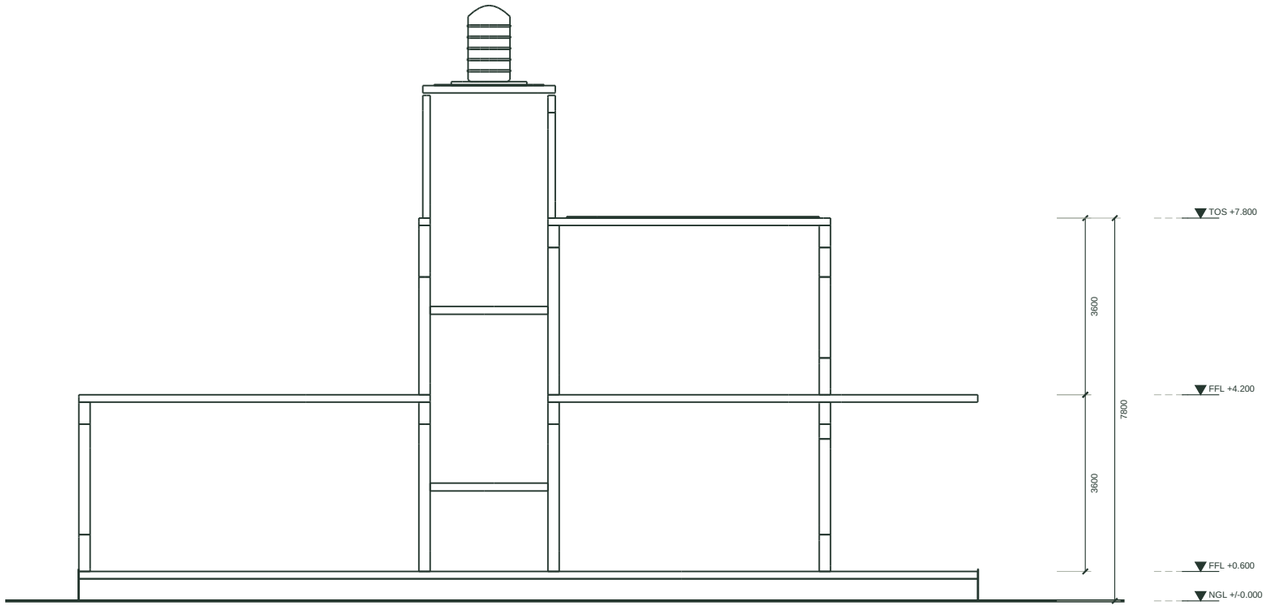

0 m 2 m 4 m

The Bungalow

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Door, window and room schedules

DOOR AND WINDOW SCHEDULE

TAG	DESCRIPTION	SIZE W x H (mm)	SILL	NO.	LOCATION
D1	Flush door, hardwood frame	1800 x 2700	-	1	Dining hall
D2	Flush door, hardwood frame	2000 x 2700	-	1	Drawing hall
D3	Main door, solid timber leaf in frame	1200 x 2400	-	1	Grilled entrance verandah
D4	Flush door, water-resistant (WPC)	800 x 2100	-	2	Guest bath, Guest toilet
D5	Flush door, hardwood frame	1000 x 2100	-	1	Garden store
D6	Flush door, hardwood frame	1000 x 2400	-	4	Guest bedroom, Dining hall +2 more
D7	Flush door, hardwood frame	900 x 2100	-	5	Master bath, Pantry and store, Bath 3, Bath 4
D8	Flush door, hardwood frame	900 x 2400	-	5	Master dressing, Puja room, Bedroom 3 +2 more
D9	Flush door, hardwood frame	1100 x 2400	-	1	Grilled entrance verandah
D10	Flush door, hardwood frame	900 x 2150	-	1	Roof terrace
SD1	Sliding glazed door, aluminium	1800 x 2400	-	1	Upper family lounge / Rear terrace
SD2	Sliding glazed door, aluminium	1500 x 2400	-	1	Front terrace · chick pergola / Upper stair ha
O1	Cased opening, no leaf	3100 x 3000	-	3	Dining hall / Stair hall +2 more
W1	Sliding window, aluminium	1500 x 2250	750	14	Dining hall, Drawing hall +5 more
W2	Sliding window, aluminium	1800 x 2250	750	4	Guest bedroom, Office, Bedroom 4
W3	Sliding window, aluminium	1500 x 1500	900	2	Kitchen
W4	Sliding window, aluminium	1000 x 1000	1200	1	Pantry and store
W5	Sliding window, aluminium	1420 x 2250	900	2	Grilled entrance verandah
W6	Sliding window, aluminium	1170 x 2250	900	2	Grilled entrance verandah
W7	Sliding window, aluminium	1300 x 2250	750	1	Dressing 3
V1	Ventilator, obscured glass / louvres	900 x 900	1500	1	Guest bath
V2	Ventilator, obscured glass / louvres	1200 x 900	1500	2	Master bath, Bath 3
V3	Ventilator, obscured glass / louvres	900 x 700	1650	1	Guest toilet
V4	Ventilator, obscured glass / louvres	1000 x 900	1500	1	Bath 4

ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

SPACE	FLOOR	CLEAR SIZE (m)	CLEAR SIZE (ft-in)	AREA m2	AREA ft2
Dining hall	Ground	7.40 x 5.30	24'3" x 17'5"	39.22	422
Drawing hall	Ground	7.40 x 6.70	24'3" x 22'0"	49.58	534
Guest bath	Ground	3.17 x 1.83	10'5" x 6'0"	5.81	63
Garden store	Ground	3.29 x 1.83	10'10" x 6'0"	6.03	65
Guest bedroom	Ground	6.69 x 4.20	21'11" x 13'9"	28.11	303
Kitchen	Ground	4.80 x 5.40	15'9" x 17'9"	25.92	279
Master bedroom	Ground	6.69 x 5.40	21'11" x 17'9"	36.14	389
Master bath	Ground	3.17 x 2.80	10'5" x 9'2"	8.88	96
Master dressing	Ground	3.29 x 2.80	10'10" x 9'2"	9.21	99
Office	Ground	6.69 x 4.20	21'11" x 13'9"	28.11	303
Pantry and store	Ground	4.80 x 2.30	15'9" x 7'7"	11.04	119
Guest toilet	Ground	2.40 x 2.27	7'10" x 7'5"	5.45	59
Puja room	Ground	2.17 x 2.27	7'1" x 7'5"	4.93	53
Rear verandah	Ground	7.40 x 3.00	24'3" x 9'10"	22.20	239
Grilled entrance verandah	Ground	4.80 x 4.20	15'9" x 13'9"	20.16	217
Open wash yard	Ground	5.26 x 3.00	17'3" x 9'10"	15.78	170
Bath 3	First	3.17 x 2.80	10'5" x 9'2"	8.88	96
Bath 4	First	4.80 x 2.30	15'9" x 7'7"	11.04	119
Bedroom 3	First	6.69 x 5.40	21'11" x 17'9"	36.14	389
Bedroom 4	First	4.80 x 5.40	15'9" x 17'9"	25.92	279
Dressing 3	First	3.29 x 2.80	10'10" x 9'2"	9.21	99
Front terrace · chick pergola	First	19.81 x 4.43	65'0" x 14'6"	119.42	1285
Upper family lounge	First	7.40 x 5.30	24'3" x 17'5"	39.22	422
Rear terrace	First	7.40 x 3.00	24'3" x 9'10"	22.20	239
Roof terrace	Roof terrace	19.81 x 6.39	65'0" x 21'0"	156.16	1681


Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Coordination axes / NOT a structural design

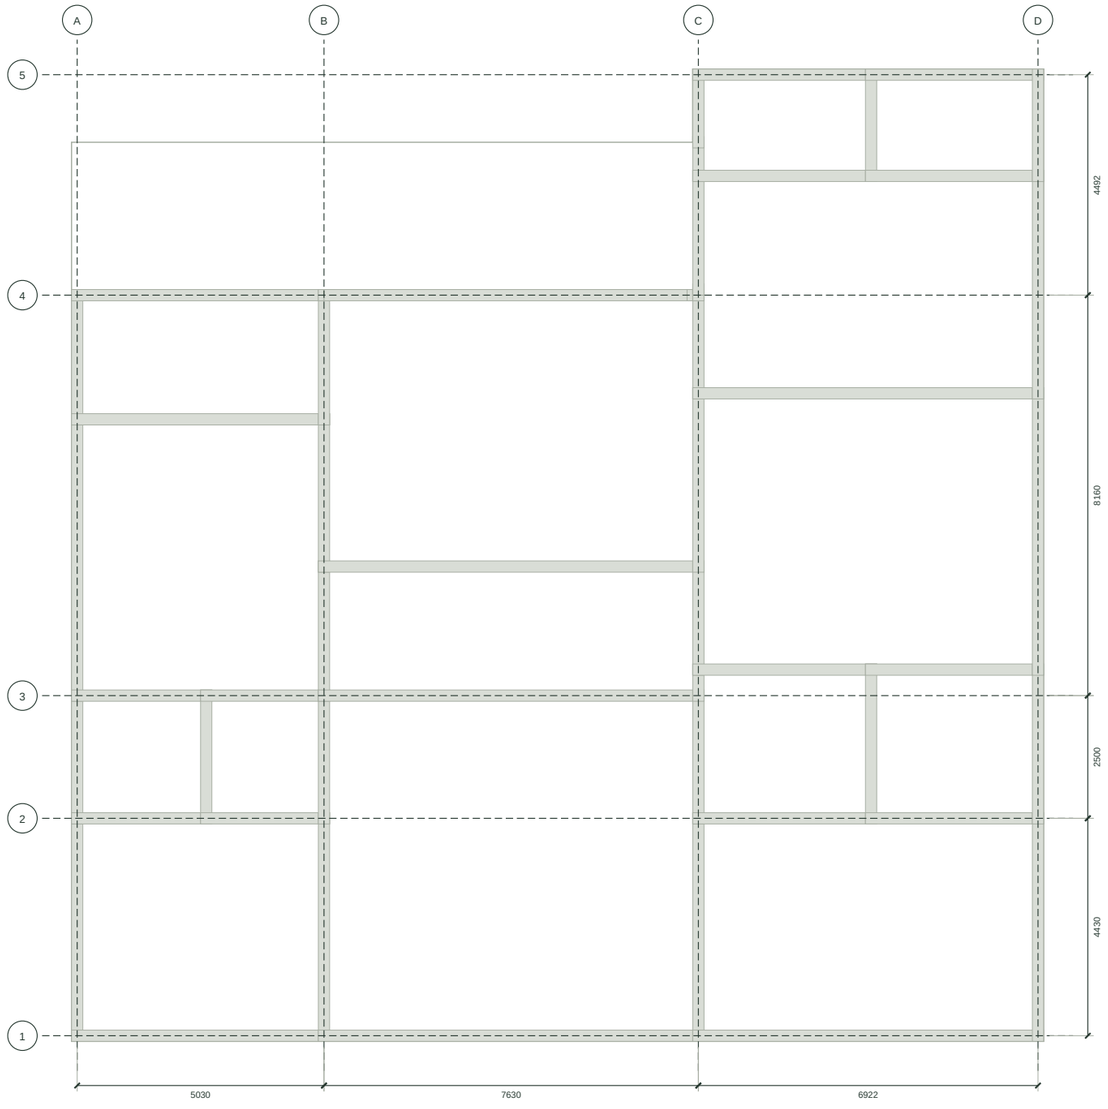

0 m 2 m 4 m

The Bungalow

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

Passing geometric checks is not evidence of construction safety or statutory compliance.

FLOORFORGE / COST / SCENARIO

Gross floor area	7282.59 ft2
Illustrative range	INR 160.22 - 224.3 lakh
Owner budget	INR 220 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

FLOORFORGE / SITE / SERVICES / STRUCTURE

Soil	black-cotton
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	27.91 degrees
Vastu score	39 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 12 weeks
Masonry and services	Week 19 + 7 weeks
Finishes and joinery	Week 26 + 8 weeks
Testing and handover	Week 34 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1 x1	Flush door, hardwood frame / 1800 x 2700 / sill 0 mm
D2 x1	Flush door, hardwood frame / 2000 x 2700 / sill 0 mm
D3 x1	Main door, solid timber leaf in frame / 1200 x 2400 / sill 0 mm
D4 x2	Flush door, water-resistant (WPC) / 800 x 2100 / sill 0 mm
D5 x1	Flush door, hardwood frame / 1000 x 2100 / sill 0 mm
D6 x4	Flush door, hardwood frame / 1000 x 2400 / sill 0 mm
D7 x5	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
D8 x5	Flush door, hardwood frame / 900 x 2400 / sill 0 mm
D9 x1	Flush door, hardwood frame / 1100 x 2400 / sill 0 mm
D10 x1	Flush door, hardwood frame / 900 x 2150 / sill 0 mm
SD1 x1	Sliding glazed door, aluminium / 1800 x 2400 / sill 0 mm
SD2 x1	Sliding glazed door, aluminium / 1500 x 2400 / sill 0 mm
O1 x3	Cased opening, no leaf / 3100 x 3000 / sill 0 mm
W1 x14	Sliding window, aluminium / 1500 x 2250 / sill 750 mm
W2 x4	Sliding window, aluminium / 1800 x 2250 / sill 750 mm
W3 x2	Sliding window, aluminium / 1500 x 1500 / sill 900 mm
W4 x1	Sliding window, aluminium / 1000 x 1000 / sill 1200 mm
W5 x2	Sliding window, aluminium / 1420 x 2250 / sill 900 mm
W6 x2	Sliding window, aluminium / 1170 x 2250 / sill 900 mm
W7 x1	Sliding window, aluminium / 1300 x 2250 / sill 750 mm
V1 x1	Ventilator, obscured glass / louvres / 900 x 900 / sill 1500 mm
V2 x2	Ventilator, obscured glass / louvres / 1200 x 900 / sill 1500 mm
V3 x1	Ventilator, obscured glass / louvres / 900 x 700 / sill 1650 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

FLOORFORGE / OPENING SCHEDULE

V4 x1	Ventilator, obscured glass / louvres / 1000 x 900 / sill 1500 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.