
Ground floor plan

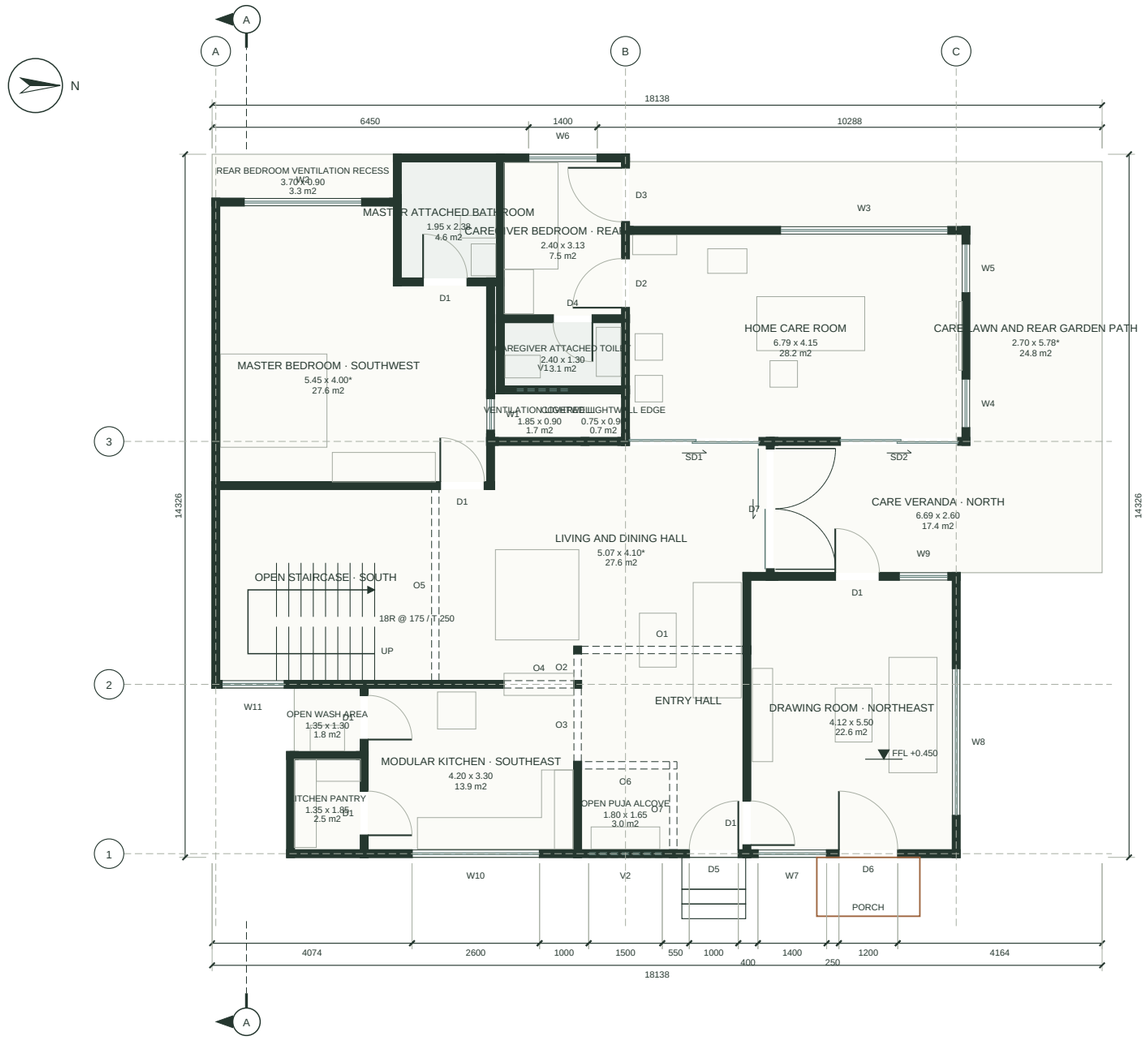

0 m 2 m 4 m

My Desired Home

SPACE	CLEAR SIZE m	AREA m2
Master attached bathroom	1.95 x 2.38	4.63
Master bedroom · southwest	5.45 x 4.00*	27.57
Rear bedroom ventilation reces	3.70 x 0.90	3.33
Home care room	6.79 x 4.15	28.17
Ventilation lightwell	1.85 x 0.90	1.67
Care lawn and rear garden path	2.70 x 5.78*	24.79
Caregiver bedroom · rear strip	2.40 x 3.13	7.50
Caregiver attached toilet	2.40 x 1.30	3.12
Covered lightwell edge	0.75 x 0.90	0.68
Entry hall	3.30 x 2.20*	9.69
Drawing room · northeast	4.12 x 5.50	22.64
Modular kitchen · southeast	4.20 x 3.30	13.86
Kitchen pantry	1.35 x 1.85	2.50
Living and dining hall	5.07 x 4.10*	27.57
Open puja alcove	1.80 x 1.65	2.97
Care veranda · north	6.69 x 2.60	17.39
Open wash area	1.35 x 1.30	1.75

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.

SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.


PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

FLOORFORGE

A-102

First floor plan

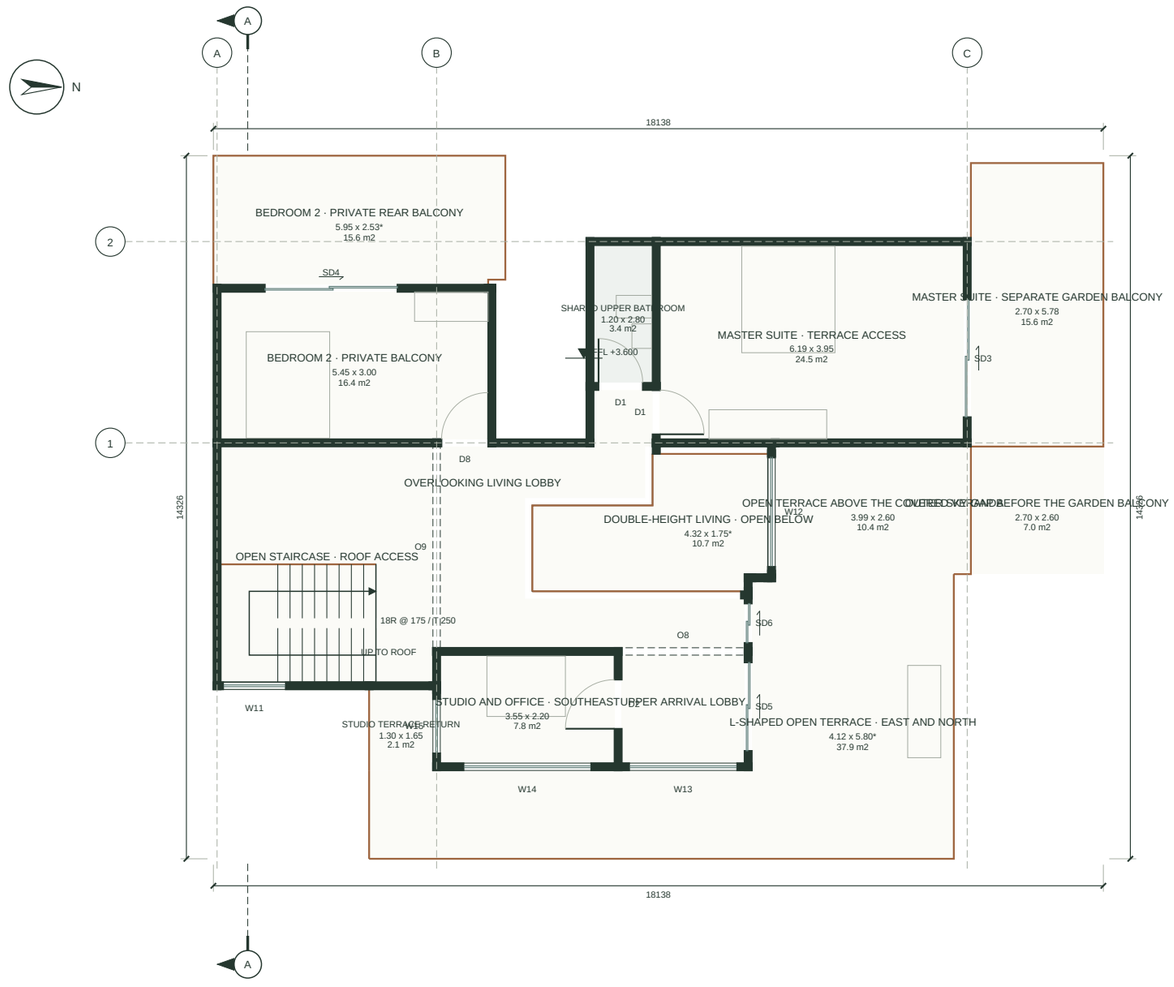

0 m 2 m 4 m

My Desired Home

SPACE	CLEAR SIZE m	AREA m2
Shared upper bathroom	1.20 x 2.80	3.36
Master suite · terrace access	6.19 x 3.95	24.45
Bedroom 2 · private balcony	5.45 x 3.00	16.35
Bedroom 2 · private rear balco	5.95 x 2.53*	15.59
Outer sky gap before the garde	2.70 x 2.60	7.02
Double-height living · open be	4.32 x 1.75*	10.70
Upper arrival lobby	2.50 x 2.20	5.50
Overlooking living lobby	1.73 x 4.10*	15.50
Studio and office · southeast	3.55 x 2.20	7.81
Studio terrace return	1.30 x 1.65	2.15
L-shaped open terrace · east a	4.12 x 5.80*	37.91
Master suite · separate garden	2.70 x 5.78	15.60
Open terrace above the covered	3.99 x 2.60	10.37

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Roof terrace and stair access

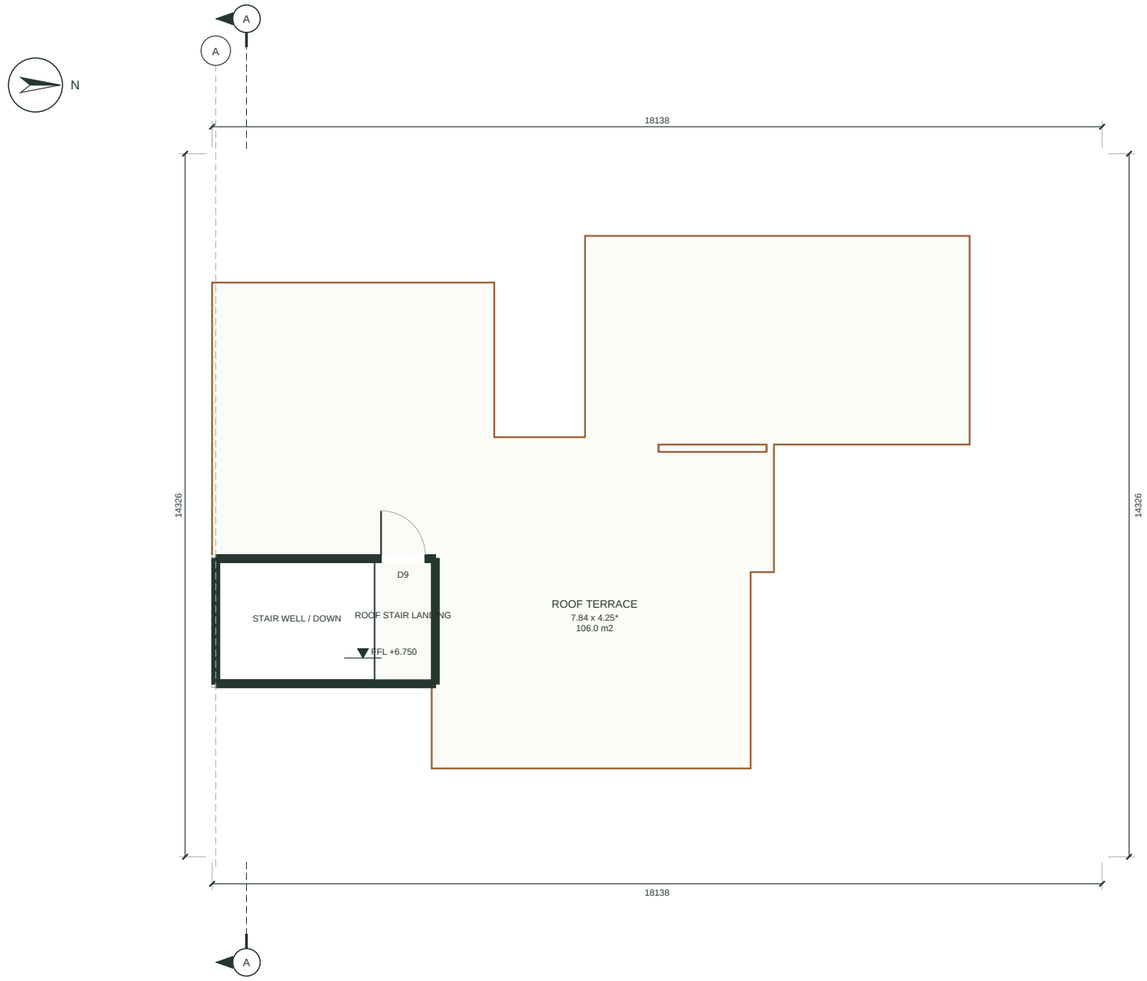

0 m 2 m 4 m

My Desired Home

SPACE	AREA m2
Open roof terrace	106.05

DRAWING NOTES

Roof access level, not an additional occupied storey.

Use the linked stair and its landing door to reach the guarded terrace.

Roof openings and headhouse positions follow the authored stair core.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

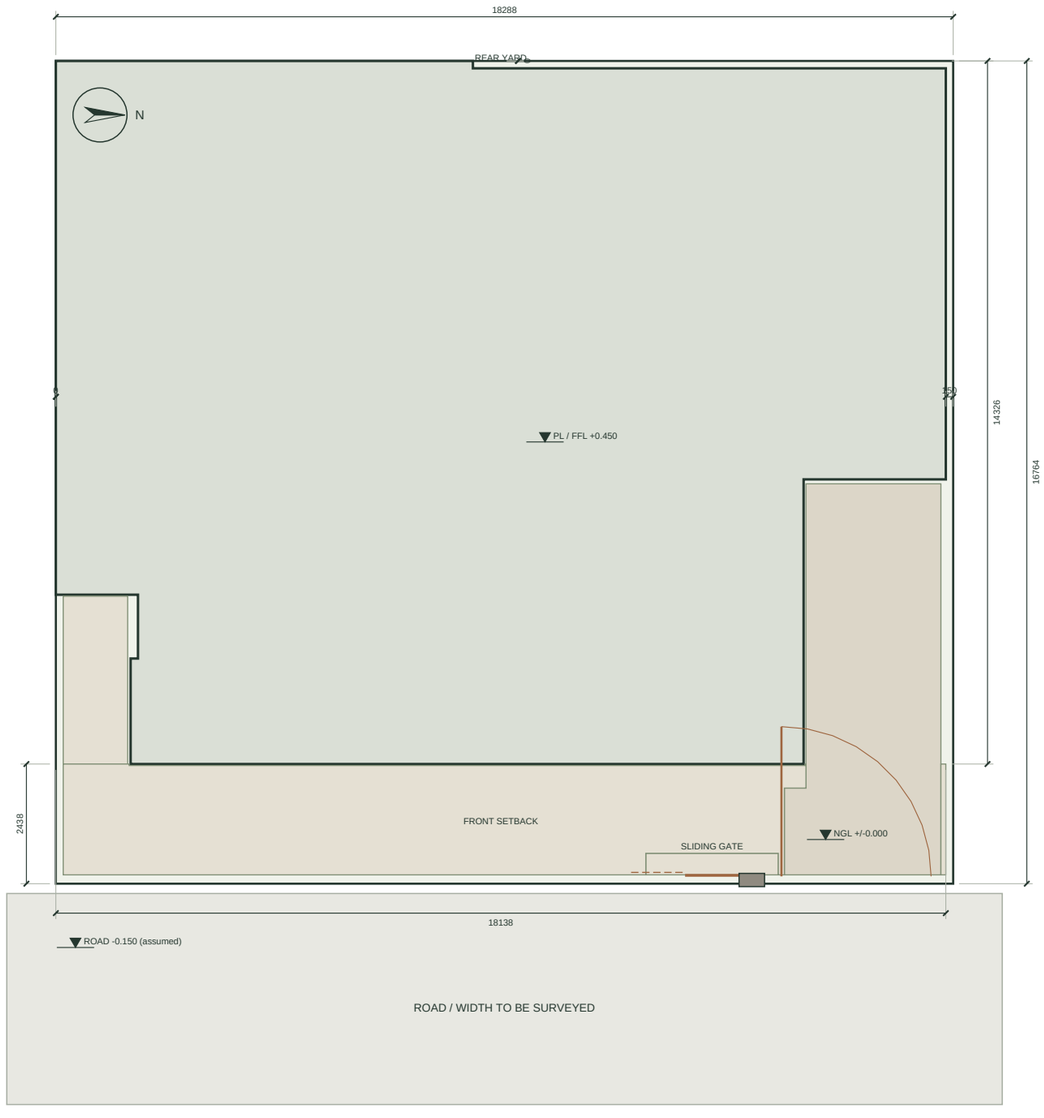

0 m 2 m 4 m

My Desired Home

AREA STATEMENT	VALUE	UNIT
Plot	306.58	m2
Footprint	236.138	m2
Gross floors	417.883	m2
Coverage	77.02	percent
Geometric FAR	1.363	ratio

DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

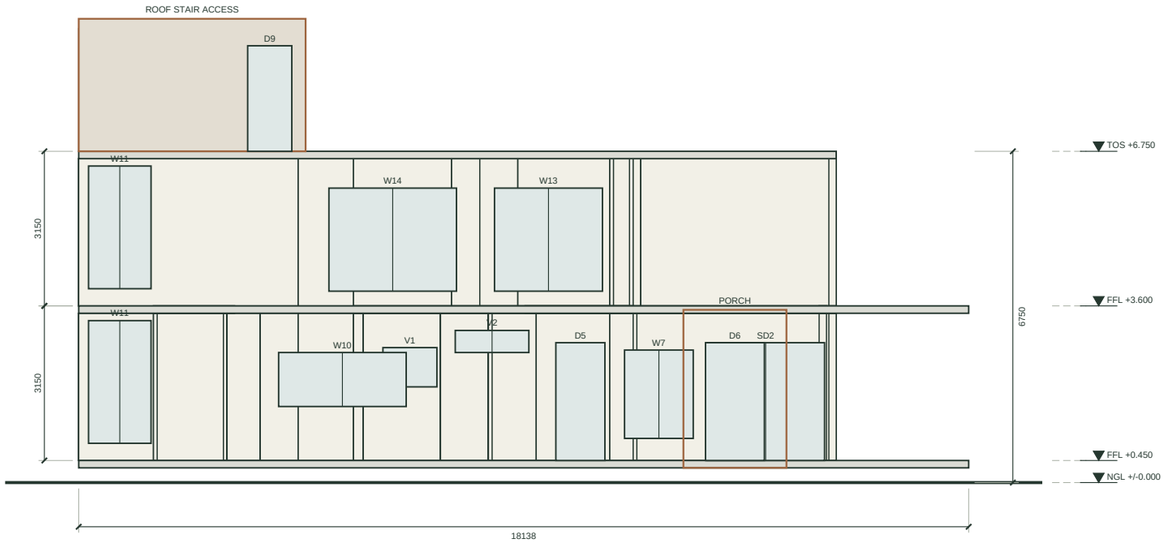

0 m 2 m 4 m

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

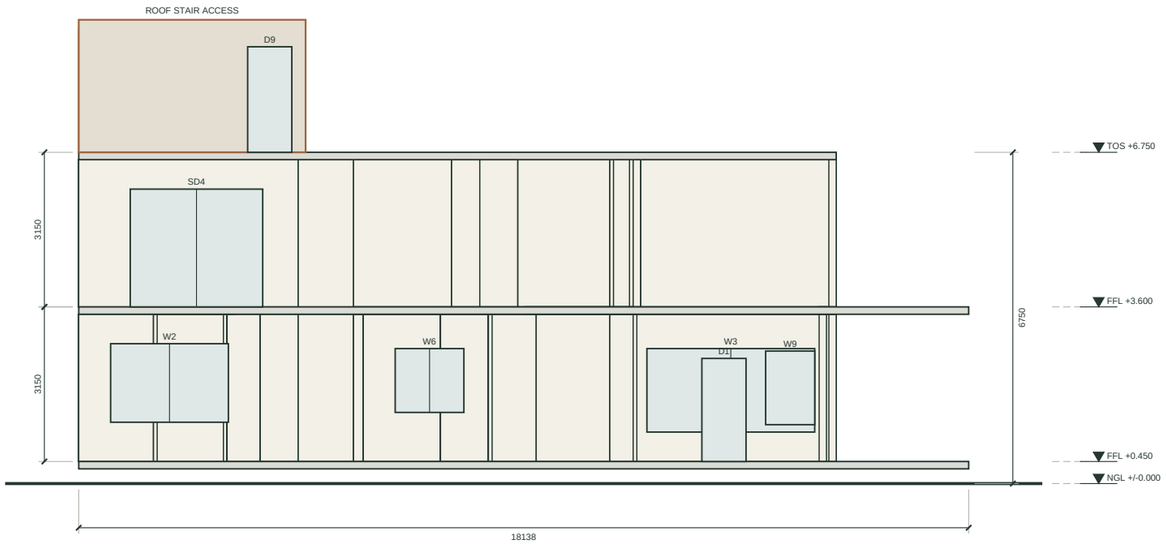

0 m 2 m 4 m

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Left elevation

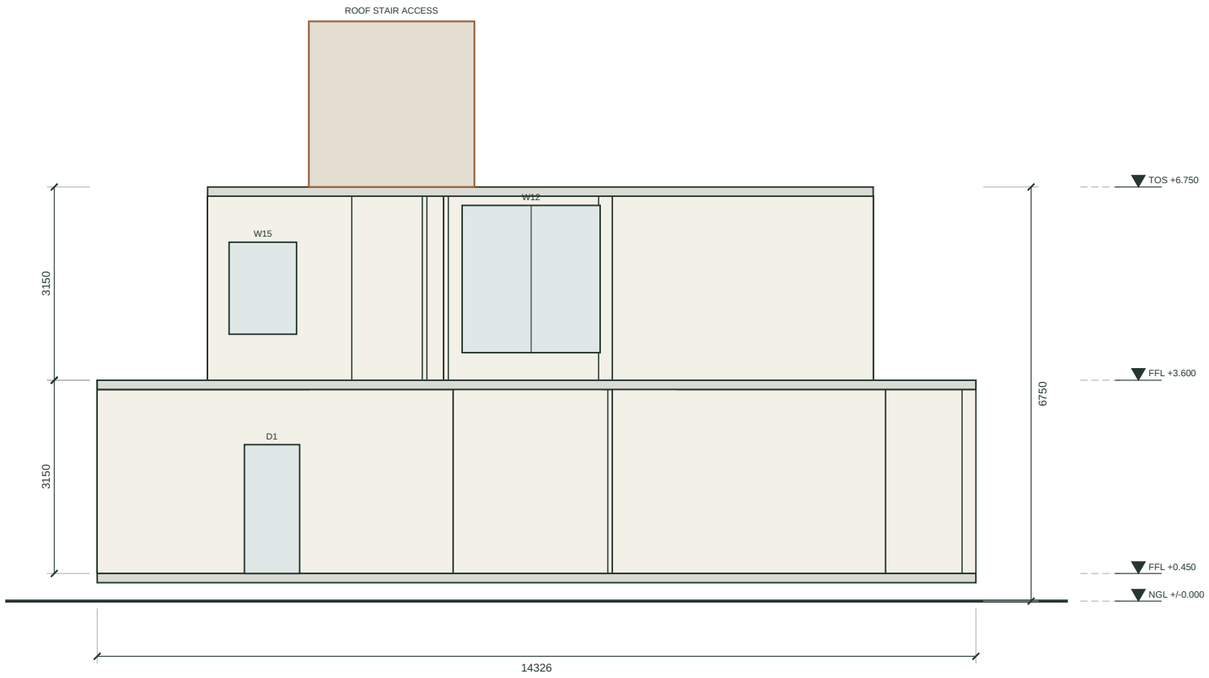

0 m 2 m 4 m

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.


PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

FLOORFORGE

A-204

Right elevation

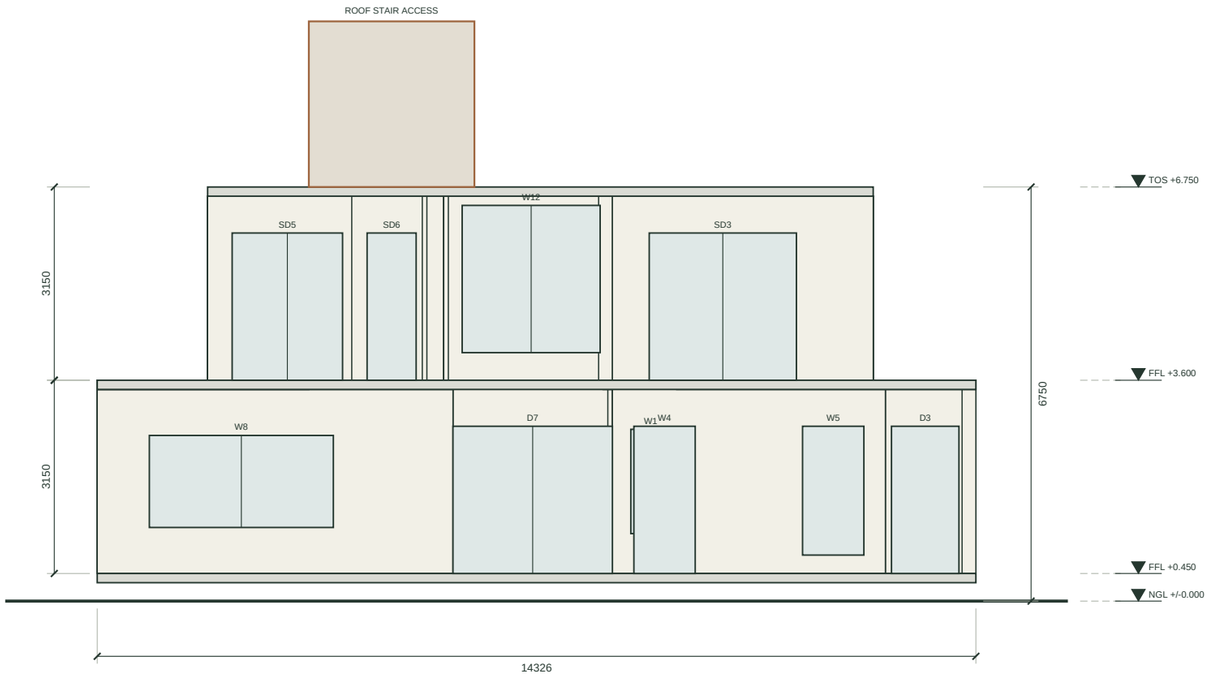

0 m 2 m 4 m

My Desired Home

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.


PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

FLOORFORGE

A-301

Section A-A / x = 0.70 m

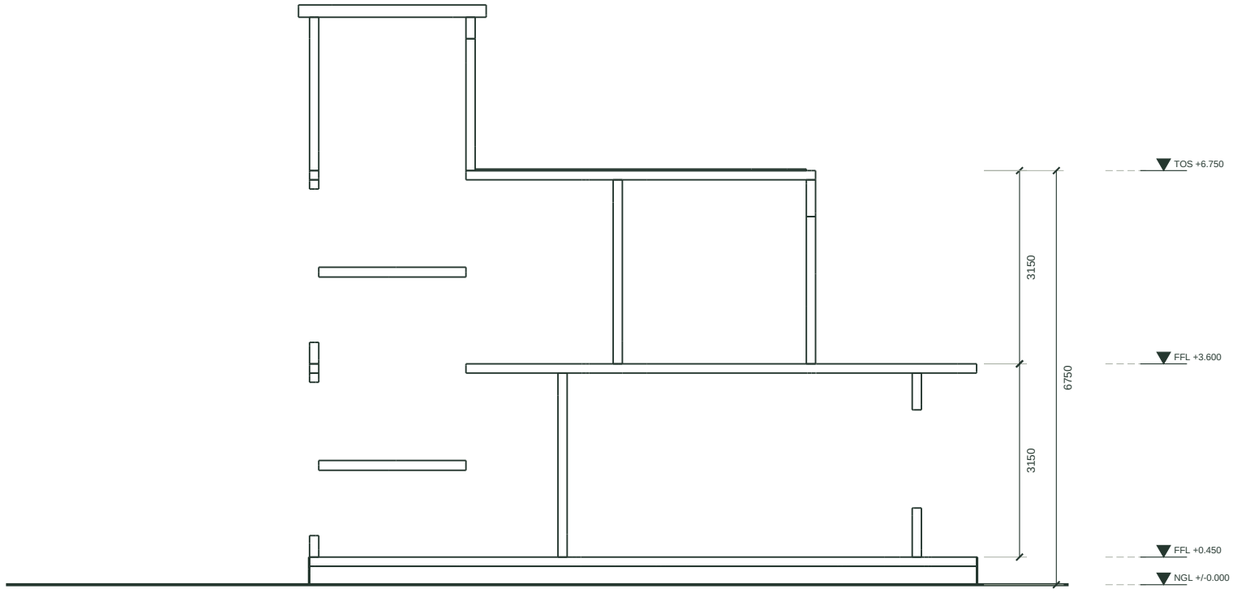

0 m 2 m 4 m

My Desired Home

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Door, window and room schedules

DOOR AND WINDOW SCHEDULE

TAG	DESCRIPTION	SIZE W x H (mm)	SILL	NO.	LOCATION
D1	Flush door, hardwood frame	900 x 2100	-	8	Master attached bathroom +6 more
D2	Flush door, hardwood frame	1000 x 2100	-	2	Caregiver bedroom · rear strip +1 more
D3	Flush door, hardwood frame	1100 x 2400	-	1	Caregiver bedroom · rear strip
D4	Flush door, water-resistant (WPC)	800 x 2100	-	1	Caregiver attached toilet
D5	Flush door, hardwood frame	1000 x 2400	-	1	Entry hall
D6	Main door, solid timber leaf in frame	1200 x 2400	-	1	Drawing room · northeast
D7	Flush door, hardwood frame	2600 x 2400	-	1	Care veranda · north
D8	Flush door, hardwood frame	950 x 2100	-	1	Bedroom 2 · private balcony
D9	Flush door, hardwood frame	900 x 2150	-	1	Roof terrace
SD1	Sliding glazed door, aluminium	2650 x 2400	-	1	Home care room / Living and dining hall
SD2	Two independent sliding leaves, wall-stacking	2400 x 2400	-	1	Home care room / Care veranda · north
SD3	Sliding glazed door, aluminium	2400 x 2400	-	1	Master suite · terrace access / Master suite ·
SD4	Sliding glazed door, aluminium	2700 x 2400	-	1	Bedroom 2 · private balcony / Bedroom 2 · priv
SD5	Sliding glazed door, aluminium	1800 x 2400	-	1	Upper arrival lobby / L-shaped open terrace ·
SD6	Sliding glazed door, aluminium	800 x 2400	-	1	Overlooking living lobby / L-shaped open terra
O1	Cased opening, no leaf	3300 x 3000	-	1	Entry hall / Living and dining hall
O2	Cased opening, no leaf	850 x 3000	-	1	Entry hall / Living and dining hall
O3	Cased opening, no leaf	1500 x 3000	-	1	Entry hall / Modular kitchen · southeast
O4	Cased opening, no leaf	1425 x 2700	-	1	Modular kitchen · southeast / Living and dinin
O5	Cased opening, no leaf	3900 x 3000	-	1	Living and dining hall / Open staircase · sout
O6	Cased opening, no leaf	2100 x 3000	-	1	Entry hall / Open puja alcove
O7	Cased opening, no leaf	1950 x 3000	-	1	Entry hall / Open puja alcove
O8	Cased opening, no leaf	2800 x 3000	-	1	Upper arrival lobby / Overlooking living lobby
O9	Cased opening, no leaf	4100 x 3000	-	1	Overlooking living lobby / Open staircase · ro
W1	Sliding window, aluminium	650 x 1700	650	1	Master bedroom · southwest
W2	Sliding window, aluminium	2400 x 1600	800	1	Master bedroom · southwest
W3	Sliding window, aluminium	3420 x 1700	600	1	Home care room
W4	Fixed full-pane glazing, aluminium frame	1000 x 2400	-	1	Home care room
W5	Sliding window, aluminium	1000 x 2100	300	1	Home care room
W6	Sliding window, aluminium	1400 x 1300	1000	1	Caregiver bedroom · rear strip
W7	Sliding window, aluminium	1400 x 1800	450	1	Drawing room · northeast
W8	Sliding window, aluminium	3000 x 1500	750	1	Drawing room · northeast
W9	Sliding window, aluminium	1000 x 1500	750	1	Drawing room · northeast
W10	Sliding window, aluminium	2600 x 1100	1100	1	Modular kitchen · southeast
W11	Sliding window, aluminium	1274 x 2500	350	2	Open staircase · south +1 more
W12	Sliding window, aluminium	2250 x 2400	450	1	Double-height living · open below
W13	Sliding window, aluminium	2200 x 2100	300	1	Upper arrival lobby
W14	Sliding window, aluminium	2600 x 2100	300	1	Studio and office · southeast
W15	Sliding window, aluminium	1100 x 1500	750	1	Studio and office · southeast
V1	Ventilator, obscured glass / louvres	1100 x 800	1500	1	Ventilation lightwell
V2	Ventilator, obscured glass / louvres	1500 x 450	2200	1	Open puja alcove

ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

SPACE	FLOOR	CLEAR SIZE (m)	CLEAR SIZE (ft-in)	AREA m2	AREA ft2
Master attached bathroom	Ground	1.95 x 2.38	6'5" x 7'10"	4.63	50
Master bedroom · southwest	Ground	5.45 x 4.00	17'11" x 13'1"	27.57	297
Rear bedroom ventilation recess	Ground	3.70 x 0.90	12'2" x 2'11"	3.33	36
Home care room	Ground	6.79 x 4.15	22'3" x 13'7"	28.17	303
Ventilation lightwell	Ground	1.85 x 0.90	6'1" x 2'11"	1.67	18
Care lawn and rear garden path	Ground	2.70 x 5.78	8'10" x 18'11"	24.79	267
Caregiver bedroom · rear strip	Ground	2.40 x 3.13	7'10" x 10'3"	7.50	81
Caregiver attached toilet	Ground	2.40 x 1.30	7'10" x 4'3"	3.12	34
Covered lightwell edge	Ground	0.75 x 0.90	2'6" x 2'11"	0.68	7
Entry hall	Ground	3.30 x 2.20	10'10" x 7'3"	9.69	104
Drawing room · northeast	Ground	4.12 x 5.50	13'6" x 18'1"	22.64	244
Modular kitchen · southeast	Ground	4.20 x 3.30	13'9" x 10'10"	13.86	149
Kitchen pantry	Ground	1.35 x 1.85	4'5" x 6'1"	2.50	27
Living and dining hall	Ground	5.07 x 4.10	16'8" x 13'5"	27.57	297
Open puja alcove	Ground	1.80 x 1.65	5'11" x 5'5"	2.97	32
Care veranda · north	Ground	6.69 x 2.60	21'11" x 8'6"	17.39	187
Open wash area	Ground	1.35 x 1.30	4'5" x 4'3"	1.75	19
Shared upper bathroom	First	1.20 x 2.80	3'11" x 9'2"	3.36	36
Master suite · terrace access	First	6.19 x 3.95	20'4" x 13'0"	24.45	263
Bedroom 2 · private balcony	First	5.45 x 3.00	17'11" x 9'10"	16.35	176
Bedroom 2 · private rear balcony	First	5.95 x 2.53	19'6" x 8'3"	15.59	168
Outer sky gap before the garden balcony	First	2.70 x 2.60	8'10" x 8'6"	7.02	76
Double-height living · open below	First	4.32 x 1.75	14'2" x 5'9"	10.70	115
Upper arrival lobby	First	2.50 x 2.20	8'2" x 7'3"	5.50	59
Overlooking living lobby	First	1.73 x 4.10	5'8" x 13'5"	15.50	167
Studio and office · southeast	First	3.55 x 2.20	11'8" x 7'3"	7.81	84
Studio terrace return	First	1.30 x 1.65	4'3" x 5'5"	2.15	23
L-shaped open terrace · east and north	First	4.12 x 5.80	13'6" x 19'0"	37.91	408
Master suite · separate garden balcony	First	2.70 x 5.78	8'10" x 18'11"	15.60	168
Open terrace above the covered veranda	First	3.99 x 2.60	13'1" x 8'6"	10.37	112
Roof terrace	Roof terrace	6.35 x 6.75	20'10" x 22'2"	106.05	1142


Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Coordination axes / NOT a structural design

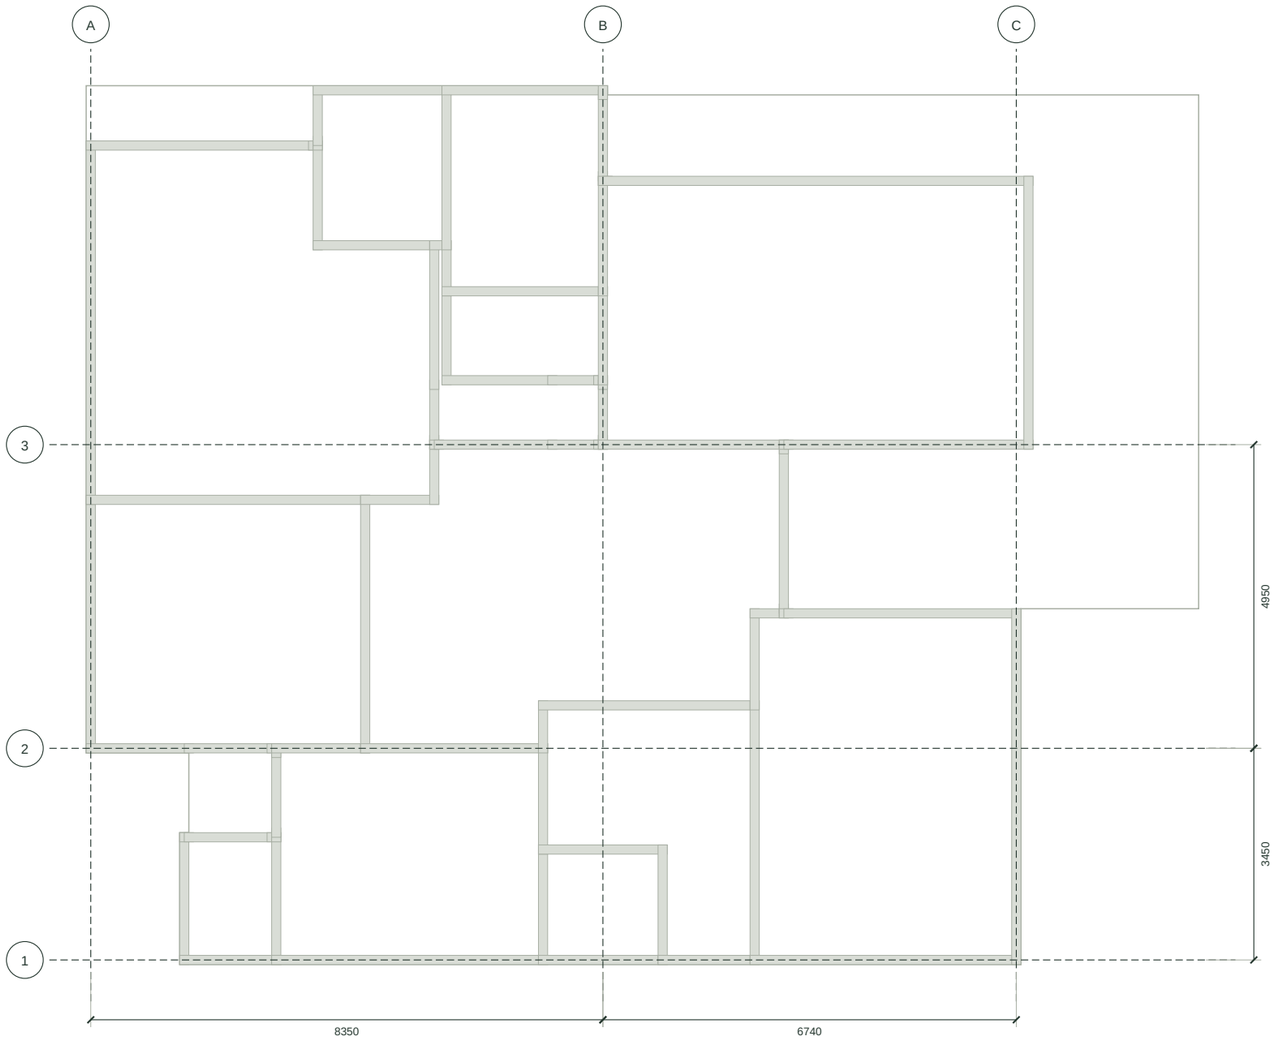

0 m 2 m 4 m

My Desired Home

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

Passing geometric checks is not evidence of construction safety or statutory compliance.

Warning: Living and dining hall: the timber door blocks daylight when closed; mesh transmits light only with timber leaves open. Permanent glazing screening is not satisfied.

Warning: Master attached bathroom: mechanical exhaust selected; duct route and capacity require design.

Warning: Caregiver attached toilet: mechanical exhaust selected; duct route and capacity require design.

Warning: Shared upper bathroom: mechanical exhaust selected; duct route and capacity require design.

FLOORFORGE / COST / SCENARIO

Gross floor area	4498.06 ft2
Illustrative range	INR 98.96 - 138.54 lakh
Owner budget	INR 65.0 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

FLOORFORGE / SITE / SERVICES / STRUCTURE

Soil	unknown
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	47.93 degrees
Vastu score	75 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 12 weeks
Masonry and services	Week 19 + 7 weeks
Finishes and joinery	Week 26 + 8 weeks
Testing and handover	Week 34 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1 x8	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
D2 x2	Flush door, hardwood frame / 1000 x 2100 / sill 0 mm
D3 x1	Flush door, hardwood frame / 1100 x 2400 / sill 0 mm
D4 x1	Flush door, water-resistant (WPC) / 800 x 2100 / sill 0 mm
D5 x1	Flush door, hardwood frame / 1000 x 2400 / sill 0 mm
D6 x1	Main door, solid timber leaf in frame / 1200 x 2400 / sill 0 mm
D7 x1	Flush door, hardwood frame / 2600 x 2400 / sill 0 mm
D8 x1	Flush door, hardwood frame / 950 x 2100 / sill 0 mm
D9 x1	Flush door, hardwood frame / 900 x 2150 / sill 0 mm
SD1 x1	Sliding glazed door, aluminium / 2650 x 2400 / sill 0 mm
SD2 x1	Two independent sliding leaves, wall-stacking / 2400 x 2400 / sill 0 mm
SD3 x1	Sliding glazed door, aluminium / 2400 x 2400 / sill 0 mm
SD4 x1	Sliding glazed door, aluminium / 2700 x 2400 / sill 0 mm
SD5 x1	Sliding glazed door, aluminium / 1800 x 2400 / sill 0 mm
SD6 x1	Sliding glazed door, aluminium / 800 x 2400 / sill 0 mm
O1 x1	Cased opening, no leaf / 3300 x 3000 / sill 0 mm
O2 x1	Cased opening, no leaf / 850 x 3000 / sill 0 mm
O3 x1	Cased opening, no leaf / 1500 x 3000 / sill 0 mm
O4 x1	Cased opening, no leaf / 1425 x 2700 / sill 0 mm
O5 x1	Cased opening, no leaf / 3900 x 3000 / sill 0 mm
O6 x1	Cased opening, no leaf / 2100 x 3000 / sill 0 mm
O7 x1	Cased opening, no leaf / 1950 x 3000 / sill 0 mm
O8 x1	Cased opening, no leaf / 2800 x 3000 / sill 0 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

FLOORFORGE / OPENING SCHEDULE

O9 x1	Cased opening, no leaf / 4100 x 3000 / sill 0 mm
W1 x1	Sliding window, aluminium / 650 x 1700 / sill 650 mm
W2 x1	Sliding window, aluminium / 2400 x 1600 / sill 800 mm
W3 x1	Sliding window, aluminium / 3420 x 1700 / sill 600 mm
W4 x1	Fixed full-pane glazing, aluminium frame / 1000 x 2400 / sill 0 mm
W5 x1	Sliding window, aluminium / 1000 x 2100 / sill 300 mm
W6 x1	Sliding window, aluminium / 1400 x 1300 / sill 1000 mm
W7 x1	Sliding window, aluminium / 1400 x 1800 / sill 450 mm
W8 x1	Sliding window, aluminium / 3000 x 1500 / sill 750 mm
W9 x1	Sliding window, aluminium / 1000 x 1500 / sill 750 mm
W10 x1	Sliding window, aluminium / 2600 x 1100 / sill 1100 mm
W11 x2	Sliding window, aluminium / 1274 x 2500 / sill 350 mm
W12 x1	Sliding window, aluminium / 2250 x 2400 / sill 450 mm
W13 x1	Sliding window, aluminium / 2200 x 2100 / sill 300 mm
W14 x1	Sliding window, aluminium / 2600 x 2100 / sill 300 mm
W15 x1	Sliding window, aluminium / 1100 x 1500 / sill 750 mm
V1 x1	Ventilator, obscured glass / louvres / 1100 x 800 / sill 1500 mm
V2 x1	Ventilator, obscured glass / louvres / 1500 x 450 / sill 2200 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION