Ground floor plan



0 m 2 m 4 m

The Palm Terrace Villa

SPACE	CLEAR SIZE m	AREA m2
Living	7.99 x 4.14*	33.45
Kitchen	3.29 x 2.70	8.90
Utility	3.29 x 1.20	3.95
Dining	4.65 x 4.12*	19.28
Pooja	2.01 x 1.65	3.32
Store	2.01 x 2.25	4.52
Hall	1.35 x 3.98	5.37
Common bath	3.29 x 1.35	4.45
Bedroom 2	3.29 x 5.16	16.99
Bath 2	1.35 x 2.61	3.52
Study	5.31 x 2.65	14.07
Bedroom 1	3.37 x 3.86	12.98
Dress 1	1.79 x 1.91	3.42
Bath 1	1.79 x 1.80	3.23

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

First floor plan

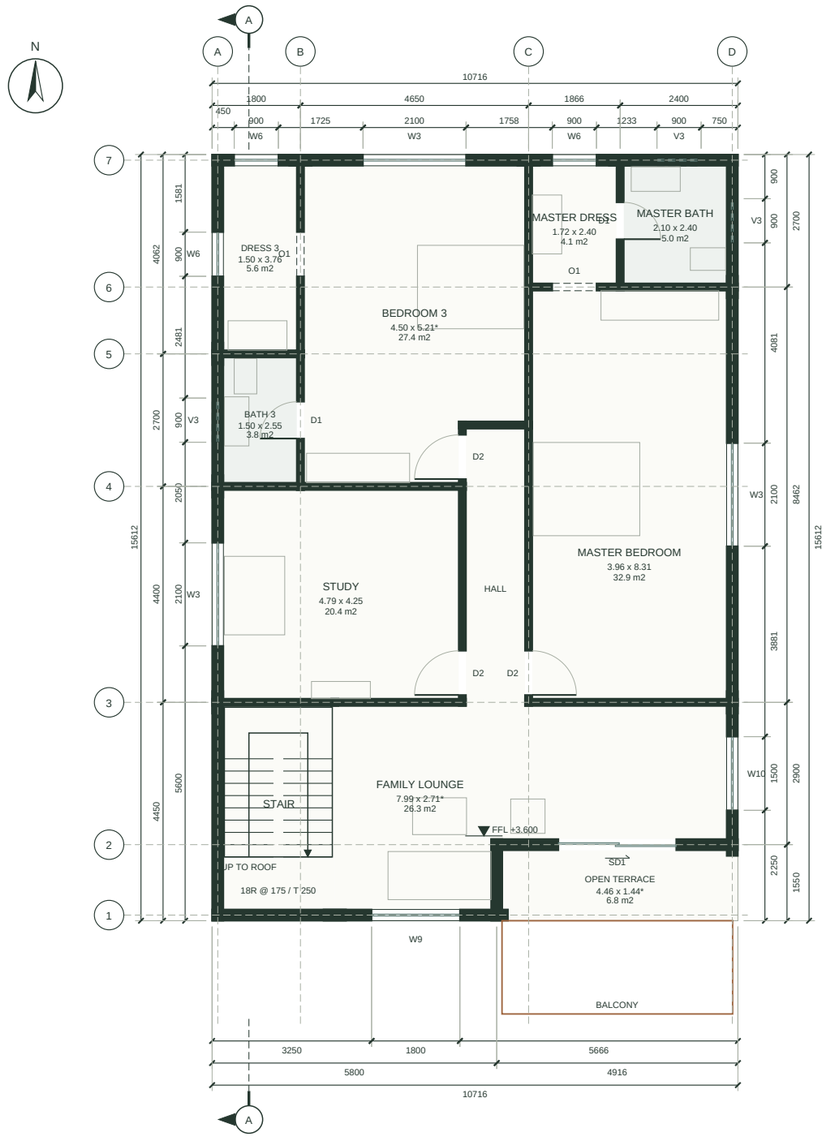

0 m 2 m 4 m

The Palm Terrace Villa

SPACE	CLEAR SIZE m	AREA m2
Family lounge	7.99 x 2.71*	26.30
Open terrace	4.46 x 1.44*	6.84
Hall	1.20 x 5.58	6.69
Study	4.79 x 4.25	20.38
Bedroom 3	4.50 x 5.21*	27.37
Dress 3	1.50 x 3.76	5.62
Bath 3	1.50 x 2.55	3.81
Master bedroom	3.96 x 8.31	32.92
Master dress	1.72 x 2.40	4.11
Master bath	2.10 x 2.40	5.02

DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Roof terrace and stair access

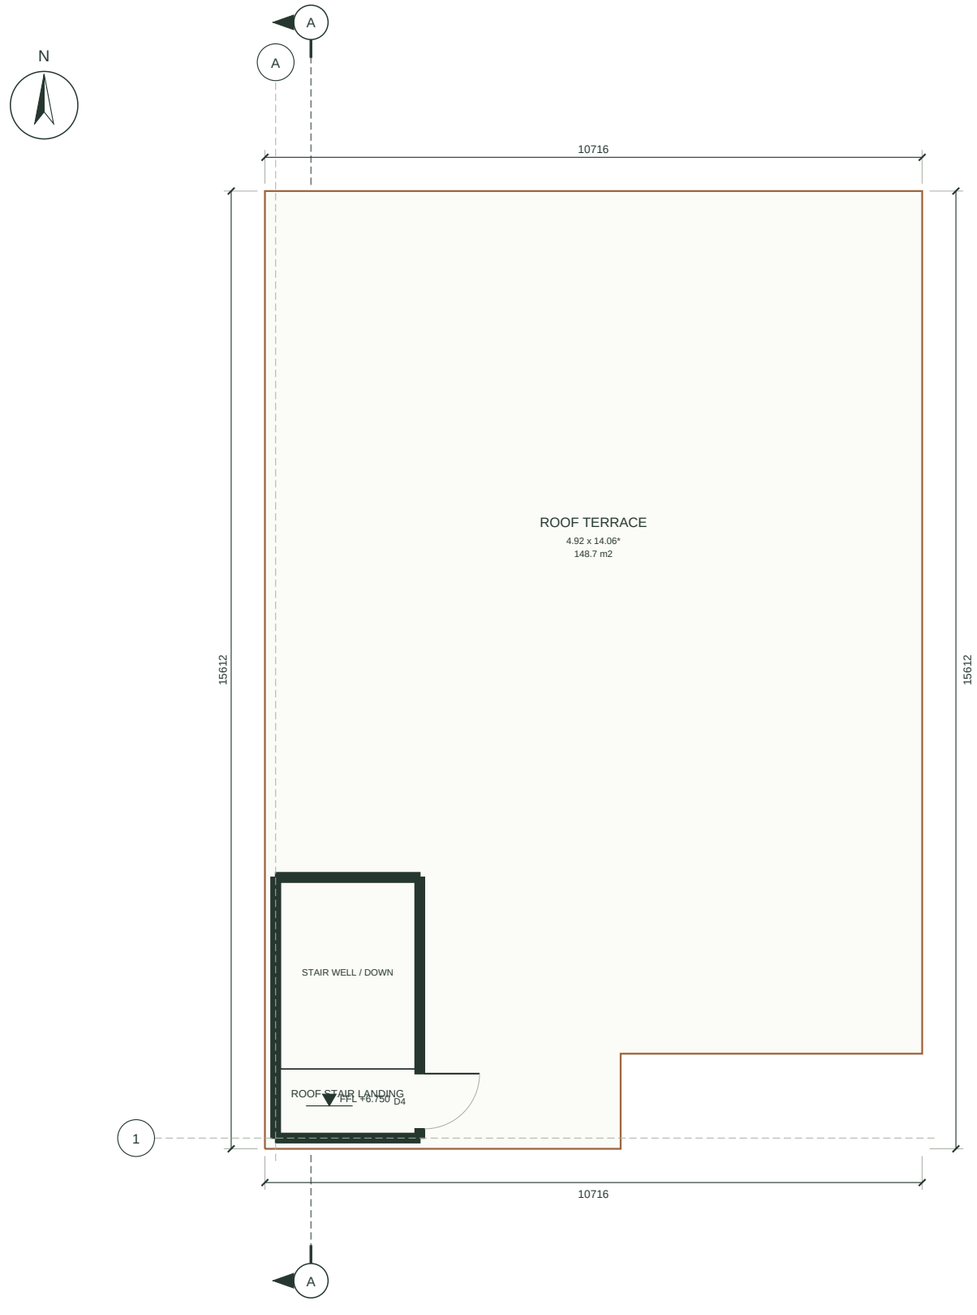

The Palm Terrace Villa

SPACE	AREA m2
Open roof terrace	148.68

DRAWING NOTES

Roof access level, not an additional occupied storey.

Use the linked stair and its landing door to reach the guarded terrace.

Roof openings and headhouse positions follow the authored stair core.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

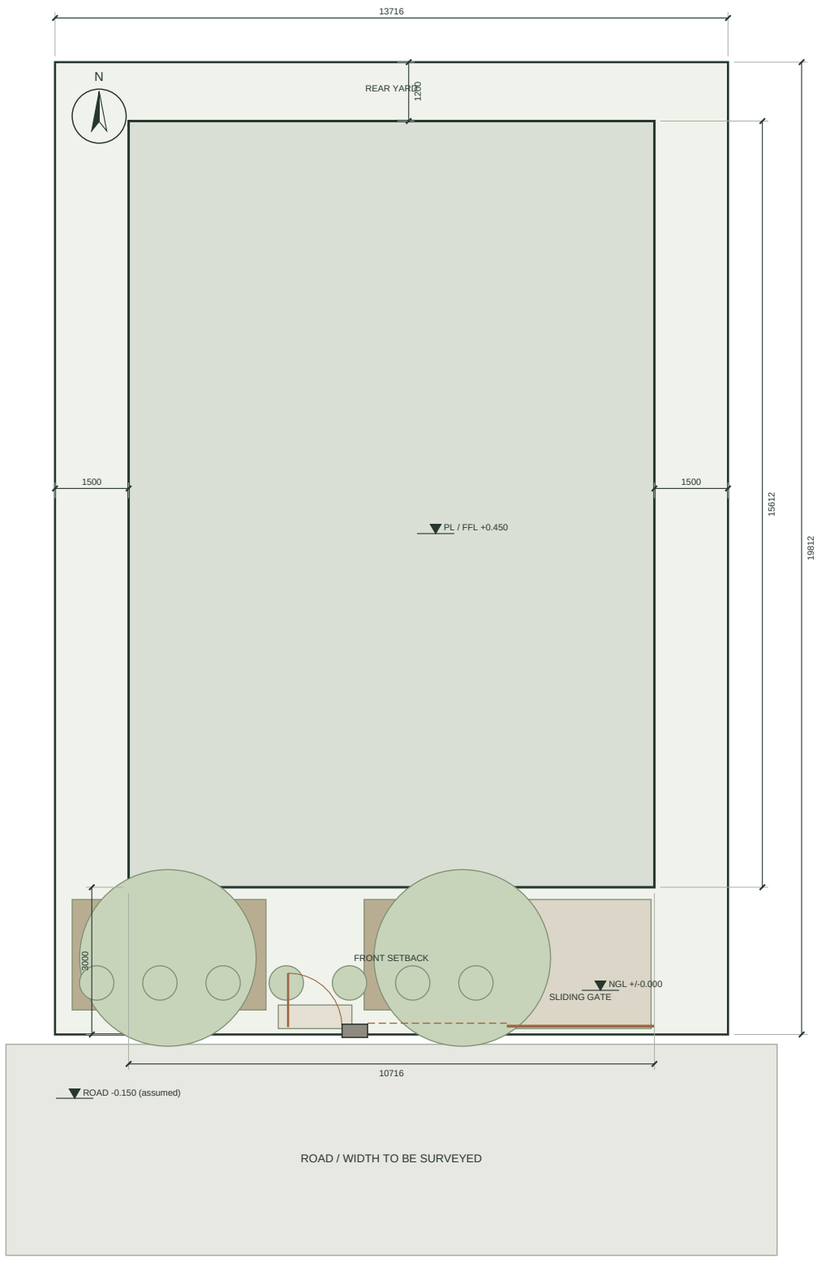

0 m 2 m 4 m

The Palm Terrace Villa

AREA STATEMENT	VALUE	UNIT
Plot	271.741	m2
Footprint	167.298	m2
Gross floors	334.596	m2
Coverage	61.57	percent
Geometric FAR	1.231	ratio

DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.


SCALE 1:125 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

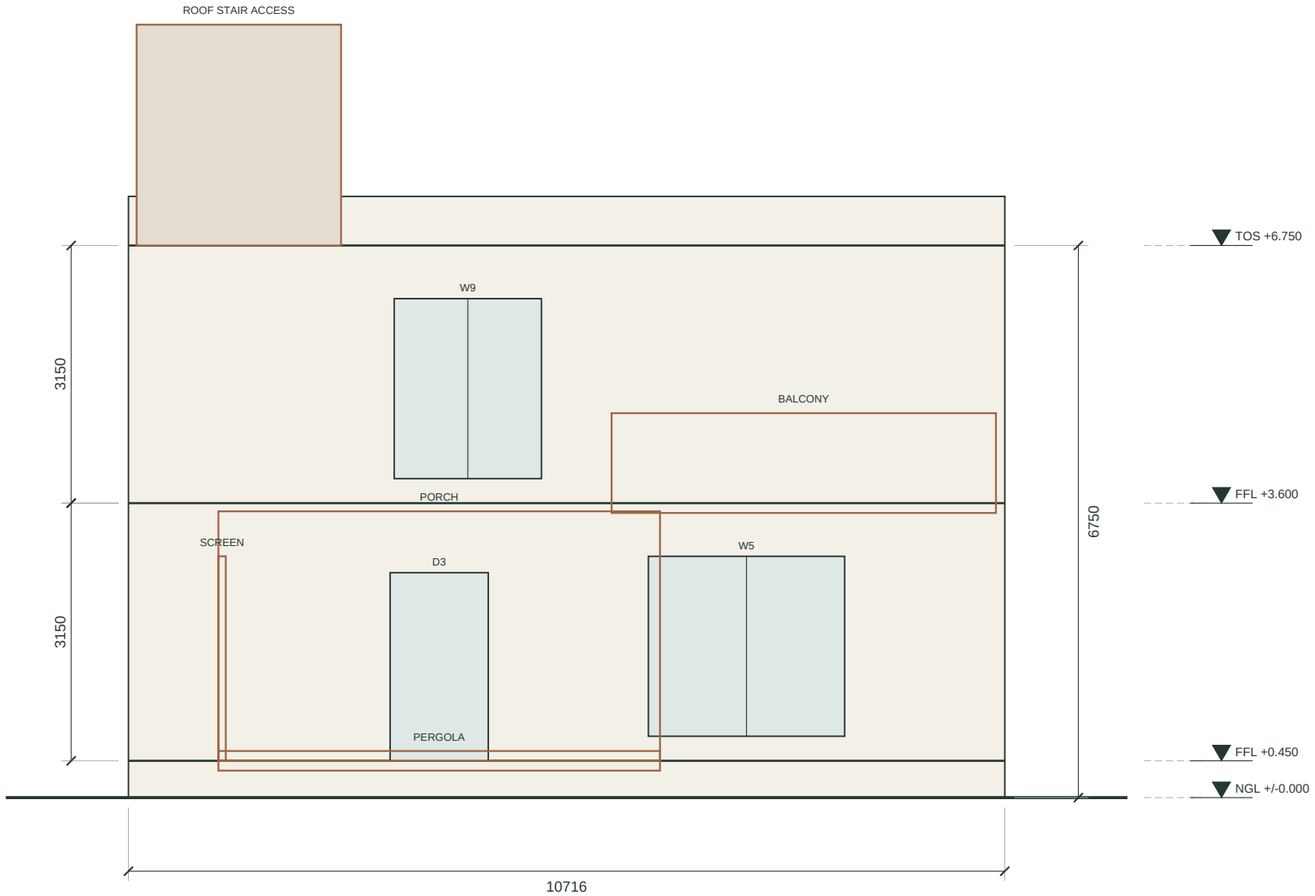

0 m 2 m 4 m

The Palm Terrace Villa

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

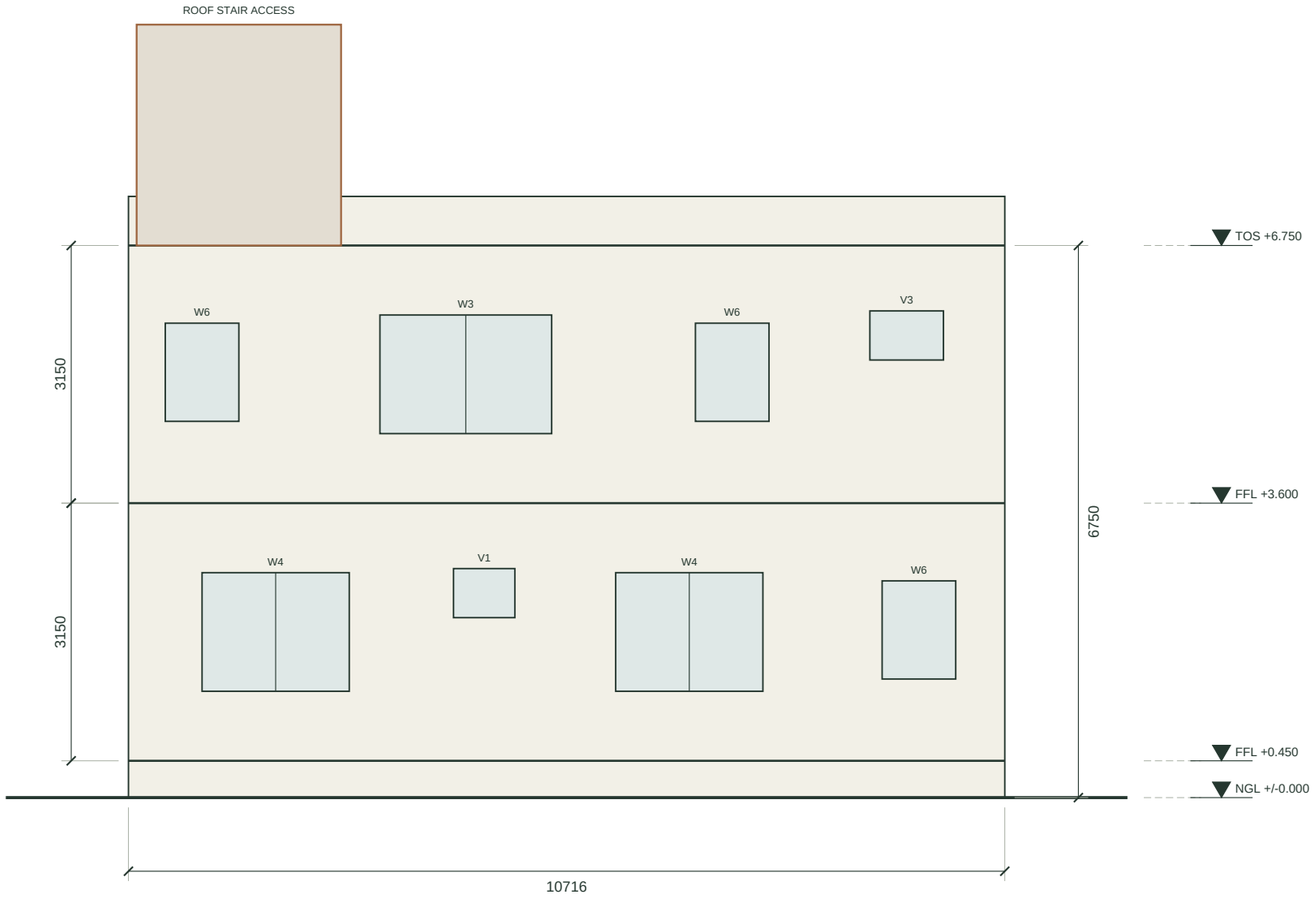

The Palm Terrace Villa

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:75 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Left elevation

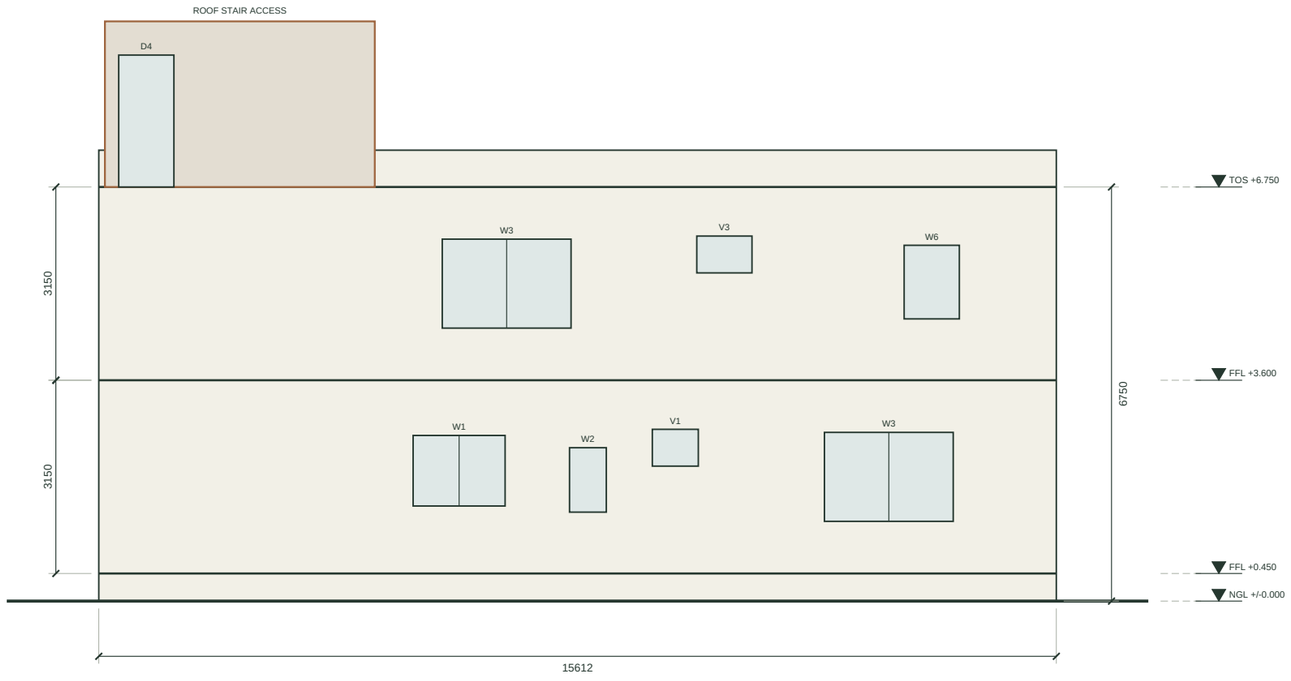

The Palm Terrace Villa

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Right elevation

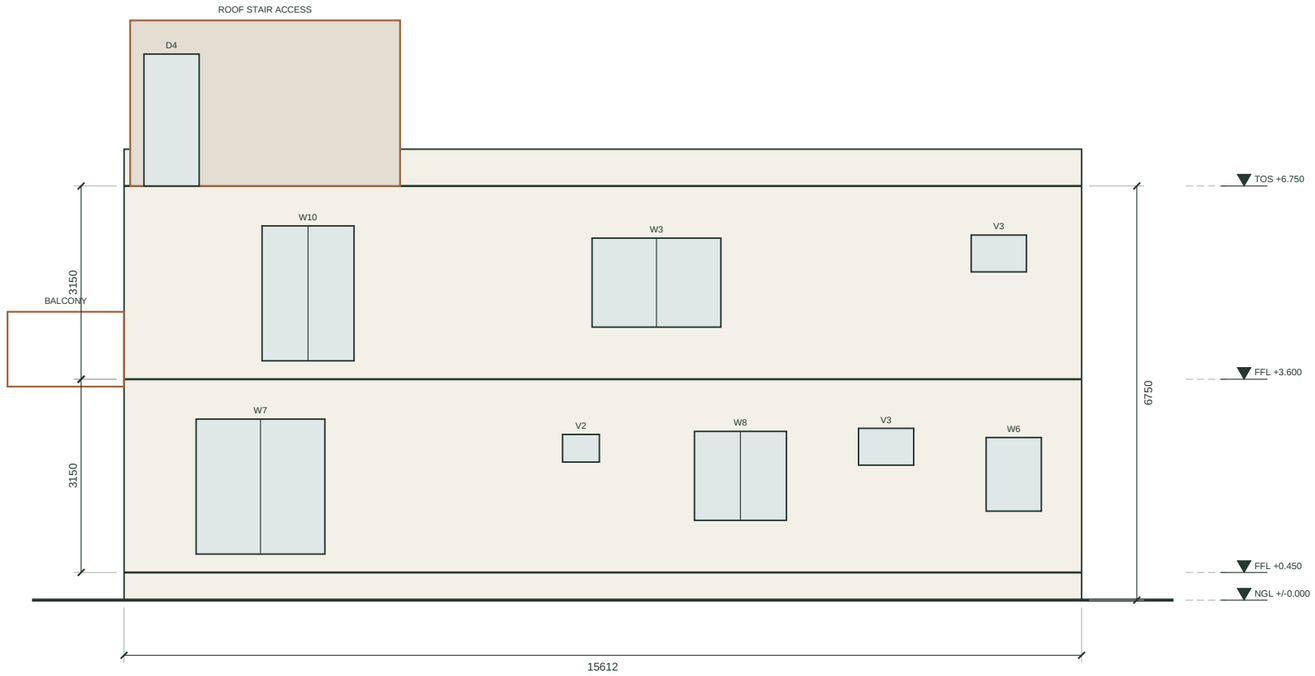

0 m 2 m 4 m

The Palm Terrace Villa

DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Section A-A / x = 0.75 m

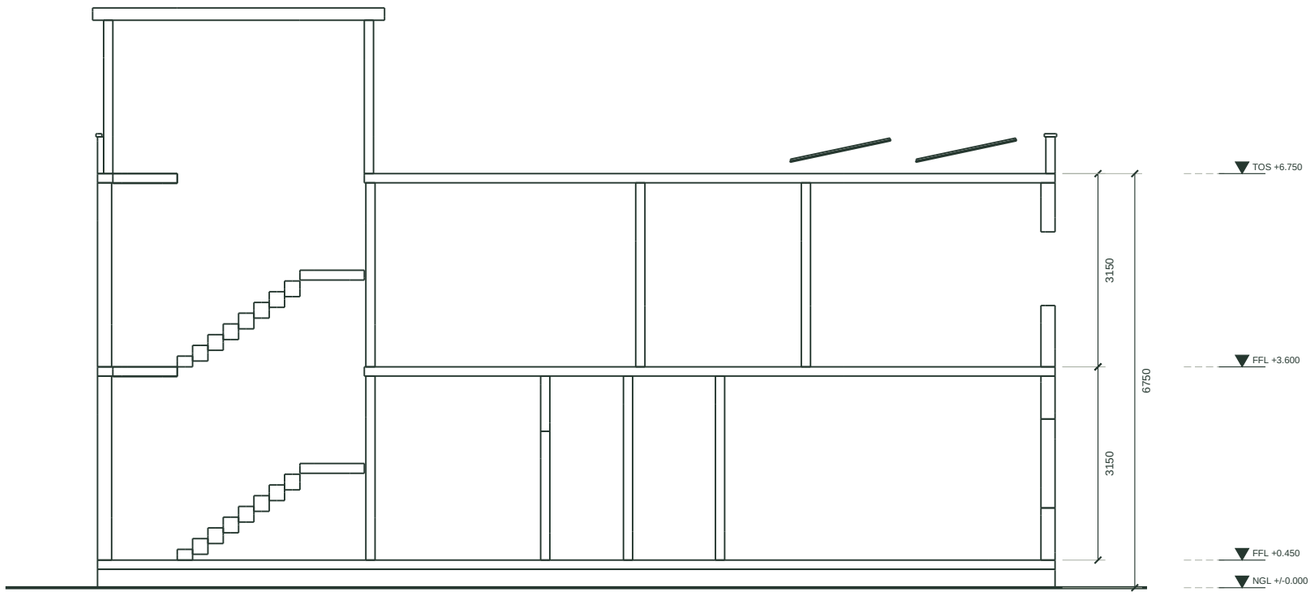

0 m 2 m 4 m

The Palm Terrace Villa

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

FLOORFORGE

A-601

Door, window and room schedules

DOOR AND WINDOW SCHEDULE

TAG	DESCRIPTION	SIZE W x H (mm)	SILL	NO.	LOCATION
D1	Flush door, water-resistant (WPC)	750 x 2100	-	7	Bath 1, Bath 2, Common bath, Store +3 more
D2	Flush door, hardwood frame	900 x 2100	-	7	Bedroom 1, Bedroom 2, Pooja, Study +2 more
D3	Main door, solid timber leaf in frame	1200 x 2300	-	1	Living
D4	Flush door, hardwood frame	900 x 2150	-	1	Roof terrace
SD1	Sliding glazed door, aluminium	2400 x 2300	-	1	Family lounge / Open terrace
O1	Cased opening, no leaf	900 x 2100	-	3	Bedroom 1 / Dress 1 +2 more
O2	Cased opening, no leaf	1500 x 2100	-	1	Dining / Kitchen
W1	Sliding window, aluminium	1500 x 1150	1100	1	Kitchen
W2	Sliding window, aluminium	600 x 1050	1000	1	Utility
W3	Sliding window, aluminium	2100 x 1450	850	4	Bedroom 2, Study, Bedroom 3, Master bedroom
W4	Sliding window, aluminium	1800 x 1450	850	2	Bedroom 2, Bedroom 1
W5	Sliding window, aluminium	2400 x 2200	300	1	Living
W6	Sliding window, aluminium	900 x 1200	1000	5	Dress 1, Dress 3, Master dress
W7	Sliding window, aluminium	2100 x 2200	300	1	Living
W8	Sliding window, aluminium	1500 x 1450	850	1	Study
W9	Sliding window, aluminium	1800 x 2200	300	1	Family lounge
W10	Sliding window, aluminium	1500 x 2200	300	1	Family lounge
V1	Ventilator, obscured glass / louvres	750 x 600	1750	2	Common bath, Bath 2
V2	Ventilator, obscured glass / louvres	600 x 450	1800	1	Store
V3	Ventilator, obscured glass / louvres	900 x 600	1750	4	Bath 1, Bath 3, Master bath

ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

SPACE	FLOOR	CLEAR SIZE (m)	CLEAR SIZE (ft-in)	AREA m2	AREA ft2
Living	Ground	7.99 x 4.14	26'2" x 13'7"	33.45	360
Kitchen	Ground	3.29 x 2.70	10'10" x 8'10"	8.90	96
Utility	Ground	3.29 x 1.20	10'10" x 3'11"	3.95	43
Dining	Ground	4.65 x 4.12	15'3" x 13'6"	19.28	208
Pooja	Ground	2.01 x 1.65	6'7" x 5'5"	3.32	36
Store	Ground	2.01 x 2.25	6'7" x 7'5"	4.52	49
Hall	Ground	1.35 x 3.98	4'5" x 13'0"	5.37	58
Common bath	Ground	3.29 x 1.35	10'10" x 4'5"	4.45	48
Bedroom 2	Ground	3.29 x 5.16	10'10" x 16'11"	16.99	183
Bath 2	Ground	1.35 x 2.61	4'5" x 8'7"	3.52	38
Study	Ground	5.31 x 2.65	17'5" x 8'8"	14.07	151
Bedroom 1	Ground	3.37 x 3.86	11'1" x 12'8"	12.98	140
Dress 1	Ground	1.79 x 1.91	5'11" x 6'3"	3.42	37
Bath 1	Ground	1.79 x 1.80	5'11" x 5'11"	3.23	35
Family lounge	First	7.99 x 2.71	26'2" x 8'11"	26.30	283
Open terrace	First	4.46 x 1.44	14'7" x 4'8"	6.84	74
Hall	First	1.20 x 5.58	3'11" x 18'3"	6.69	72
Study	First	4.79 x 4.25	15'9" x 13'11"	20.38	219
Bedroom 3	First	4.50 x 5.21	14'9" x 17'1"	27.37	295
Dress 3	First	1.50 x 3.76	4'11" x 12'4"	5.62	60
Bath 3	First	1.50 x 2.55	4'11" x 8'4"	3.81	41
Master bedroom	First	3.96 x 8.31	13'0" x 27'3"	32.92	354
Master dress	First	1.72 x 2.40	5'8" x 7'10"	4.11	44
Master bath	First	2.10 x 2.40	6'10" x 7'10"	5.02	54
Roof terrace	Roof terrace	10.72 x 14.06	35'2" x 46'2"	148.68	1600


Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Coordination axes / NOT a structural design

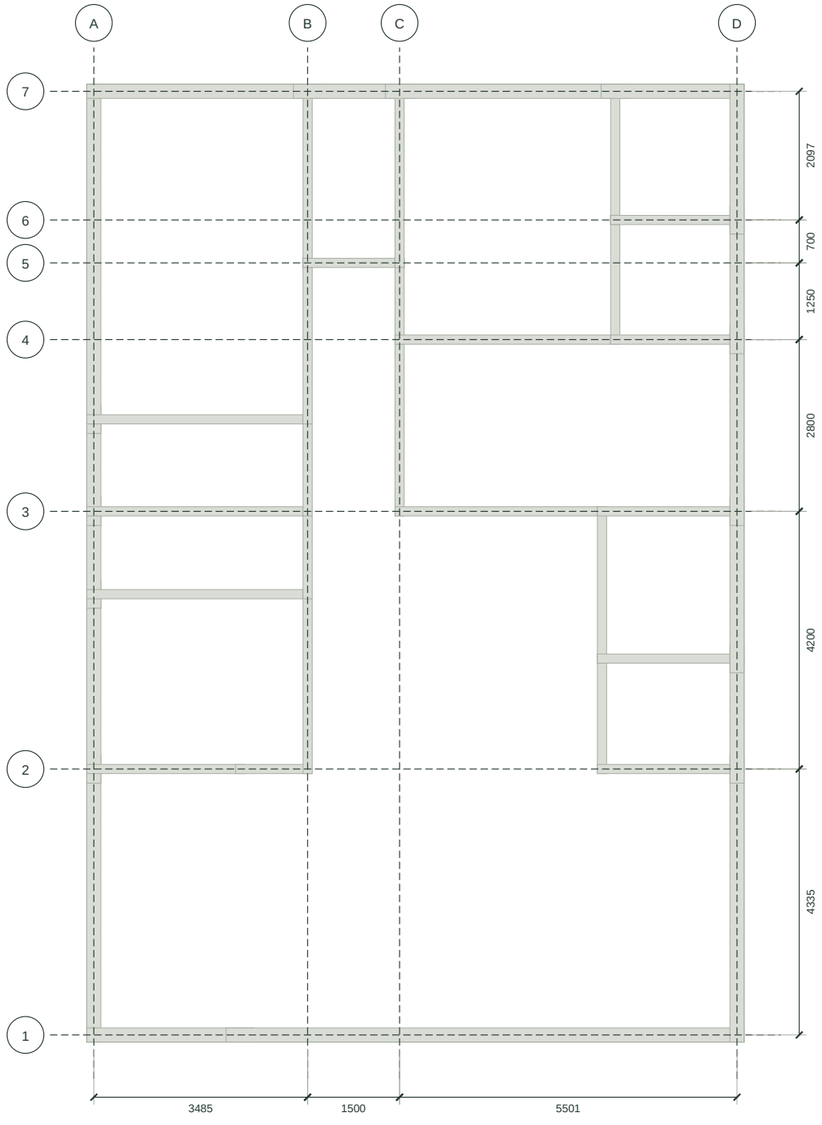

0 m 2 m 4 m

The Palm Terrace Villa

DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

FLOORFORGE / REVIEW / SCOPE

Geometry	preliminary_geometry_pass
Regulatory	NOT EVALUATED
Structure	NOT DESIGNED
Accessibility	NOT CERTIFIED

Passing geometric checks is not evidence of construction safety or statutory compliance.

Warning: Master bedroom: openings are 9.25% of the floor area; NBC-style screening asks for at least 10%.

FLOORFORGE / COST / SCENARIO

Gross floor area	3601.57 ft2
Illustrative range	INR 79.23 - 110.93 lakh
Owner budget	INR 65.0 lakh
Rates	[2000.0, 2800.0] INR/ft2

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

FLOORFORGE / SITE / SERVICES / STRUCTURE

Soil	unknown
Foundation recommendation	NOT PROVIDED: requires geotechnical design
Solar elevation	47.93 degrees
Vastu score	22 / advisory only

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

FLOORFORGE / TIMELINE / ASSUMPTIONS

Survey, soil and approvals	Week 0 + 6 weeks
Foundations and substructure	Week 6 + 5 weeks
Frame and roof	Week 11 + 12 weeks
Masonry and services	Week 19 + 7 weeks
Finishes and joinery	Week 26 + 8 weeks
Testing and handover	Week 34 + 2 weeks

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

FLOORFORGE / OPENING SCHEDULE

D1 x7	Flush door, water-resistant (WPC) / 750 x 2100 / sill 0 mm
D2 x7	Flush door, hardwood frame / 900 x 2100 / sill 0 mm
D3 x1	Main door, solid timber leaf in frame / 1200 x 2300 / sill 0 mm
D4 x1	Flush door, hardwood frame / 900 x 2150 / sill 0 mm
SD1 x1	Sliding glazed door, aluminium / 2400 x 2300 / sill 0 mm
O1 x3	Cased opening, no leaf / 900 x 2100 / sill 0 mm
O2 x1	Cased opening, no leaf / 1500 x 2100 / sill 0 mm
W1 x1	Sliding window, aluminium / 1500 x 1150 / sill 1100 mm
W2 x1	Sliding window, aluminium / 600 x 1050 / sill 1000 mm
W3 x4	Sliding window, aluminium / 2100 x 1450 / sill 850 mm
W4 x2	Sliding window, aluminium / 1800 x 1450 / sill 850 mm
W5 x1	Sliding window, aluminium / 2400 x 2200 / sill 300 mm
W6 x5	Sliding window, aluminium / 900 x 1200 / sill 1000 mm
W7 x1	Sliding window, aluminium / 2100 x 2200 / sill 300 mm
W8 x1	Sliding window, aluminium / 1500 x 1450 / sill 850 mm
W9 x1	Sliding window, aluminium / 1800 x 2200 / sill 300 mm
W10 x1	Sliding window, aluminium / 1500 x 2200 / sill 300 mm
V1 x2	Ventilator, obscured glass / louvres / 750 x 600 / sill 1750 mm
V2 x1	Ventilator, obscured glass / louvres / 600 x 450 / sill 1800 mm
V3 x4	Ventilator, obscured glass / louvres / 900 x 600 / sill 1750 mm

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION