
Ground floor plan

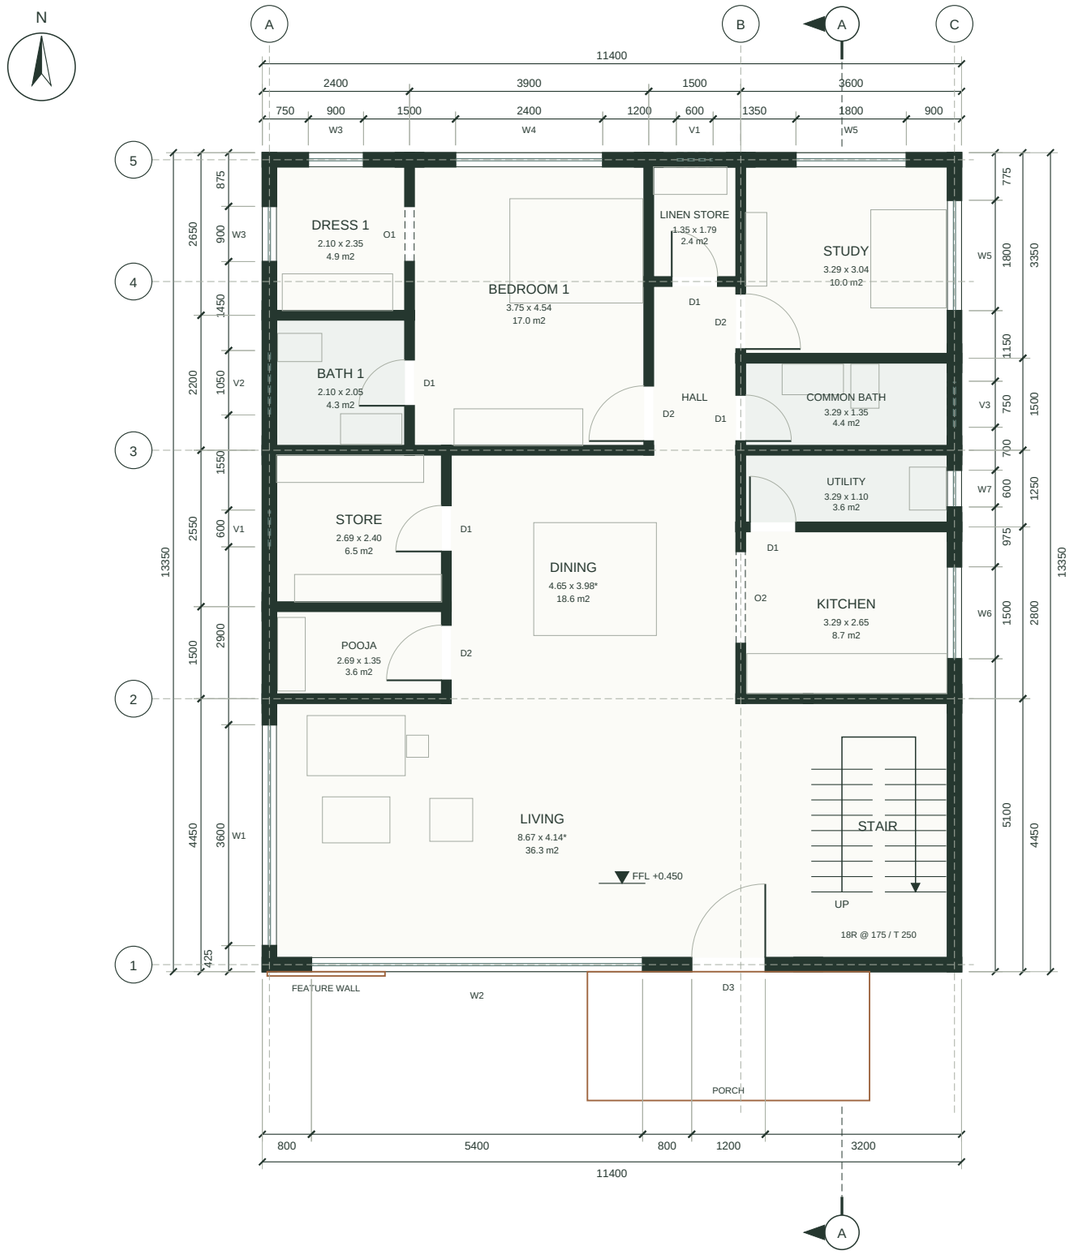


## The Verandah House

| SPACE | CLEAR SIZE m | AREA m2 |
|---|---|---|
| Living | 8.67 x 4.14* | 36.29 |
| Kitchen | 3.29 x 2.65 | 8.73 |
| Utility | 3.29 x 1.10 | 3.62 |
| Dining | 4.65 x 3.98* | 18.59 |
| Pooja | 2.69 x 1.35 | 3.64 |
| Store | 2.69 x 2.40 | 6.47 |
| Hall | 1.35 x 2.67 | 3.61 |
| Linen store | 1.35 x 1.79 | 2.42 |
| Common bath | 3.29 x 1.35 | 4.45 |
| Study | 3.29 x 3.04 | 10.03 |
| Bedroom 1 | 3.75 x 4.54 | 17.04 |
| Dress 1 | 2.10 x 2.35 | 4.91 |
| Bath 1 | 2.10 x 2.05 | 4.29 |

## DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

First floor plan

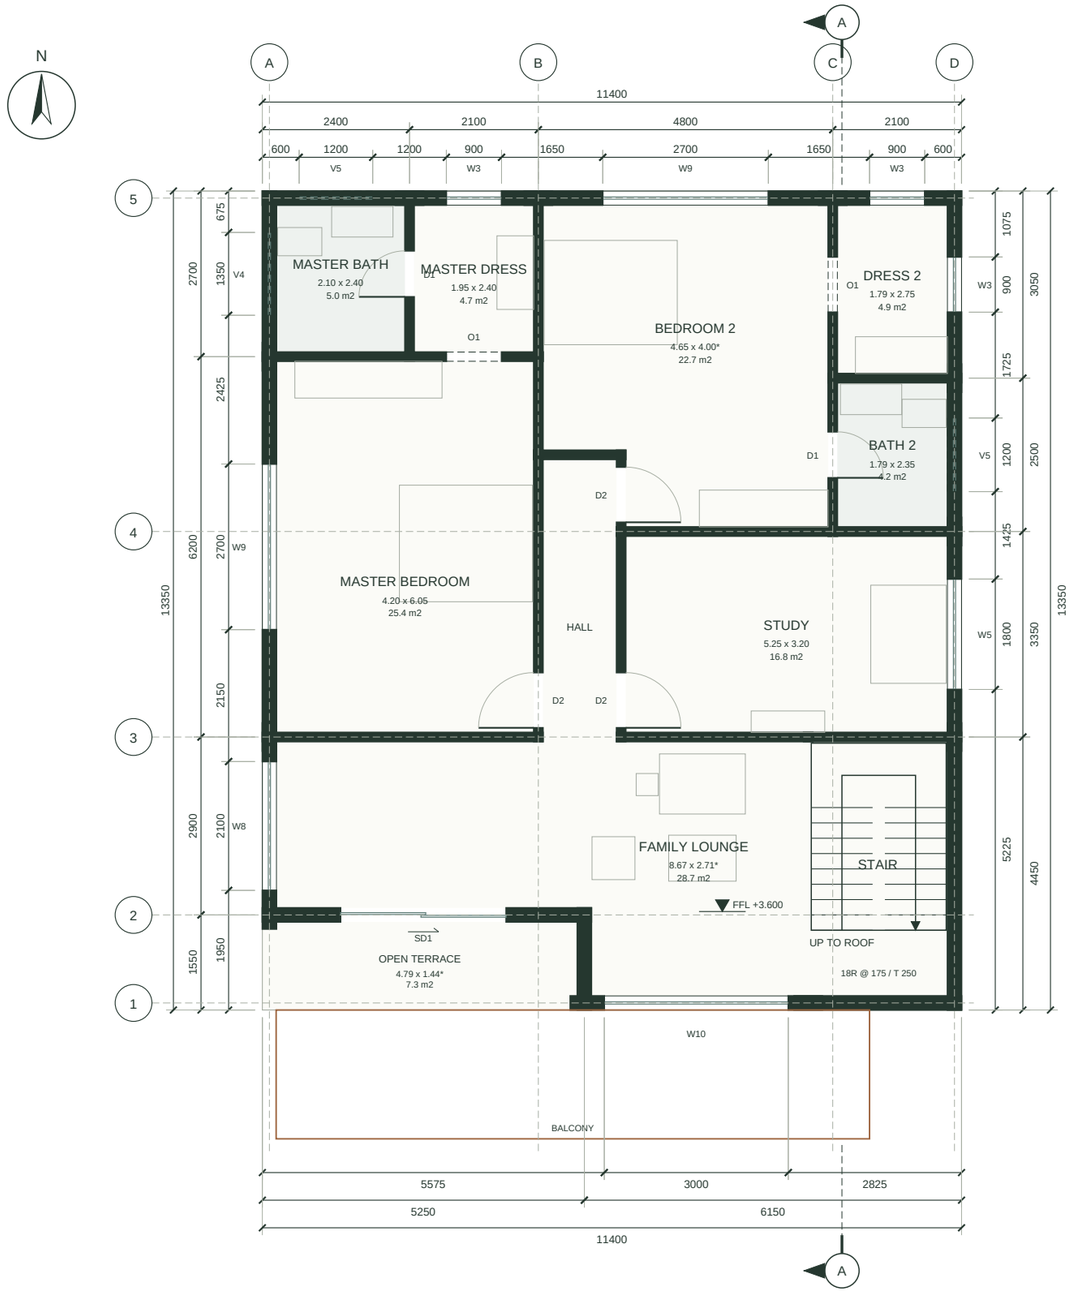


0 m 2 m 4 m

## The Verandah House

| SPACE | CLEAR SIZE m | AREA m2 |
|---|---|---|
| Family lounge | 8.67 x 2.71* | 28.66 |
| Open terrace | 4.79 x 1.44* | 7.32 |
| Hall | 1.20 x 4.53 | 5.43 |
| Study | 5.25 x 3.20 | 16.78 |
| Bedroom 2 | 4.65 x 4.00* | 22.70 |
| Dress 2 | 1.79 x 2.75 | 4.93 |
| Bath 2 | 1.79 x 2.35 | 4.22 |
| Master bedroom | 4.20 x 6.05 | 25.38 |
| Master dress | 1.95 x 2.40 | 4.67 |
| Master bath | 2.10 x 2.40 | 5.02 |

## DRAWING NOTES

All dimensions in millimetres; levels in metres above natural ground level (NGL).

Room sizes are clear sizes between finished wall faces; * marks the principal rectangle of an L-shaped room.

Dimension chains: openings, walls, overall. Tags: D door, SD sliding door, O cased opening, W window, V ventilator (see A-601).

Door leaves are drawn in the room they open into. Windows above the +1.2 m cut are dashed; furniture is schematic at true scale.

Grid bubbles are coordination axes only, not column positions. No certified IS 962 or local-code compliance is claimed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Roof terrace and stair access

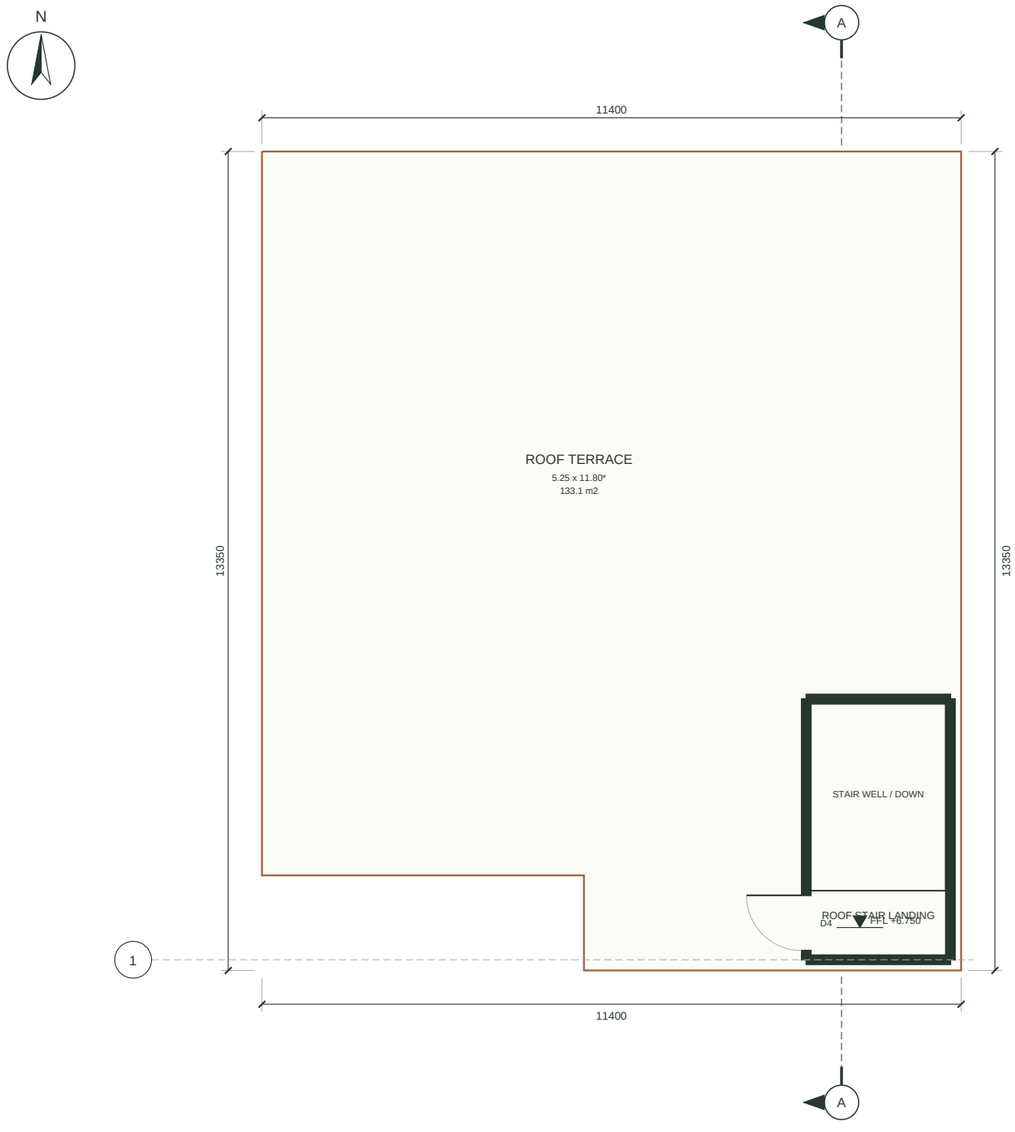


## The Verandah House

| SPACE | AREA m2 |
|---|---|
| Open roof terrace | 133.05 |

## DRAWING NOTES

Roof access level, not an additional occupied storey.

Use the linked stair and its landing door to reach the guarded terrace.

Roof openings and headhouse positions follow the authored stair core.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Site plan

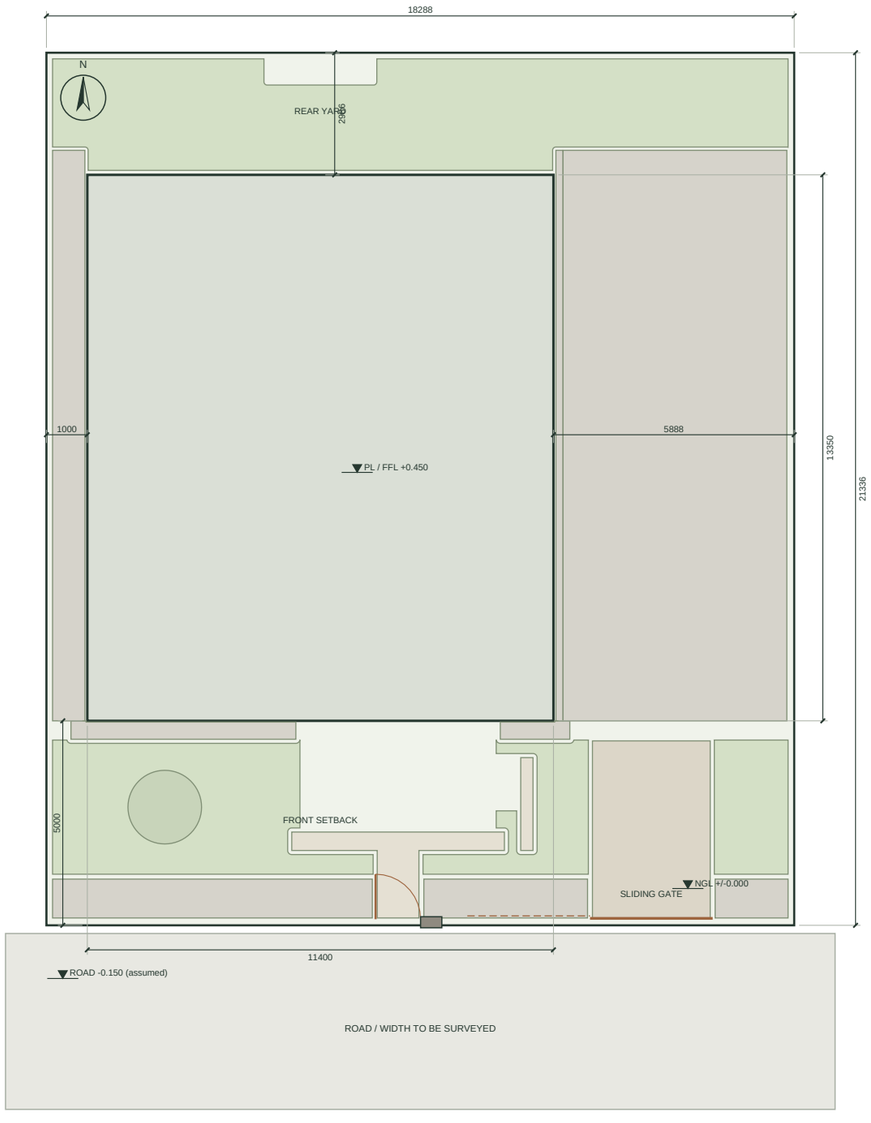


0 m 2 m 4 m

## The Verandah House

| AREA STATEMENT | VALUE | UNIT |
|---|---|---|
| Plot | 390.193 | m2 |
| Footprint | 152.19 | m2 |
| Gross floors | 304.38 | m2 |
| Coverage | 39.0 | percent |
| Geometric FAR | 0.78 | ratio |

## DRAWING NOTES

Setbacks shown are design assumptions, not verified byelaws.

Road width, property line and levels need a survey.

No surveyed drainage fall or flood datum supplied.

Default steps are not a step-free route.


SCALE 1:150 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Front elevation

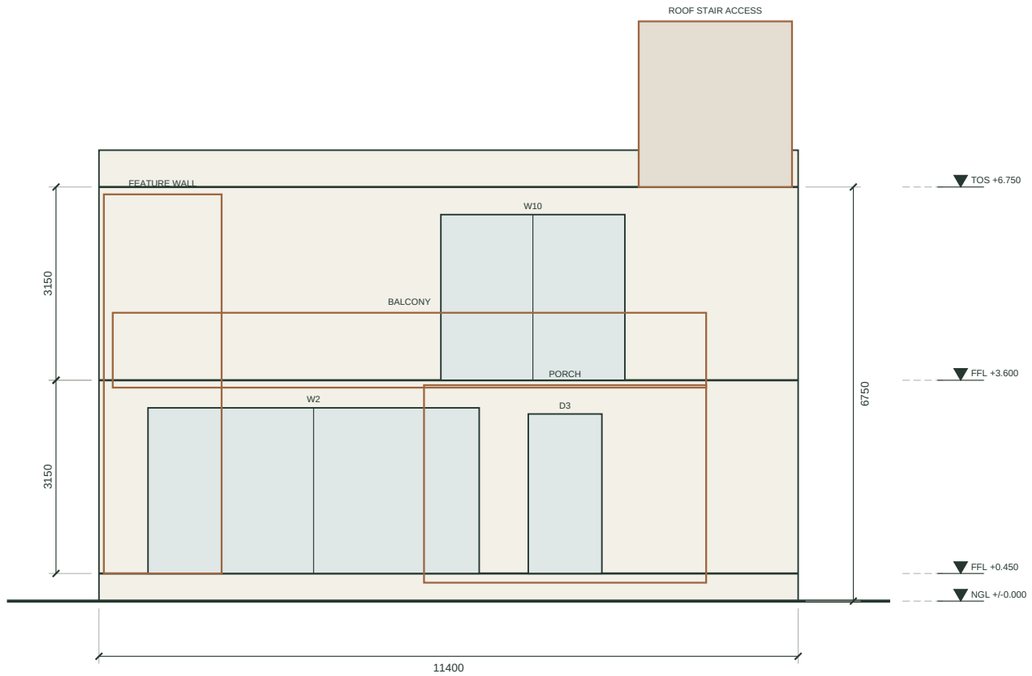


0 m 2 m 4 m

The Verandah House

## DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Rear elevation

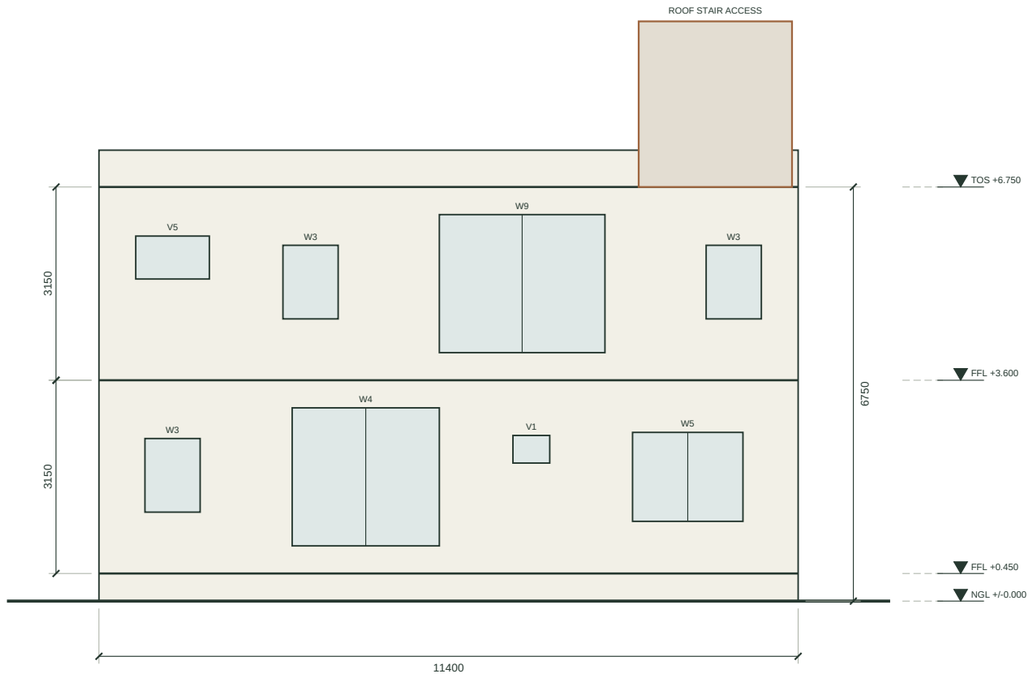


0 m 2 m 4 m

The Verandah House

## DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.


Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Left elevation

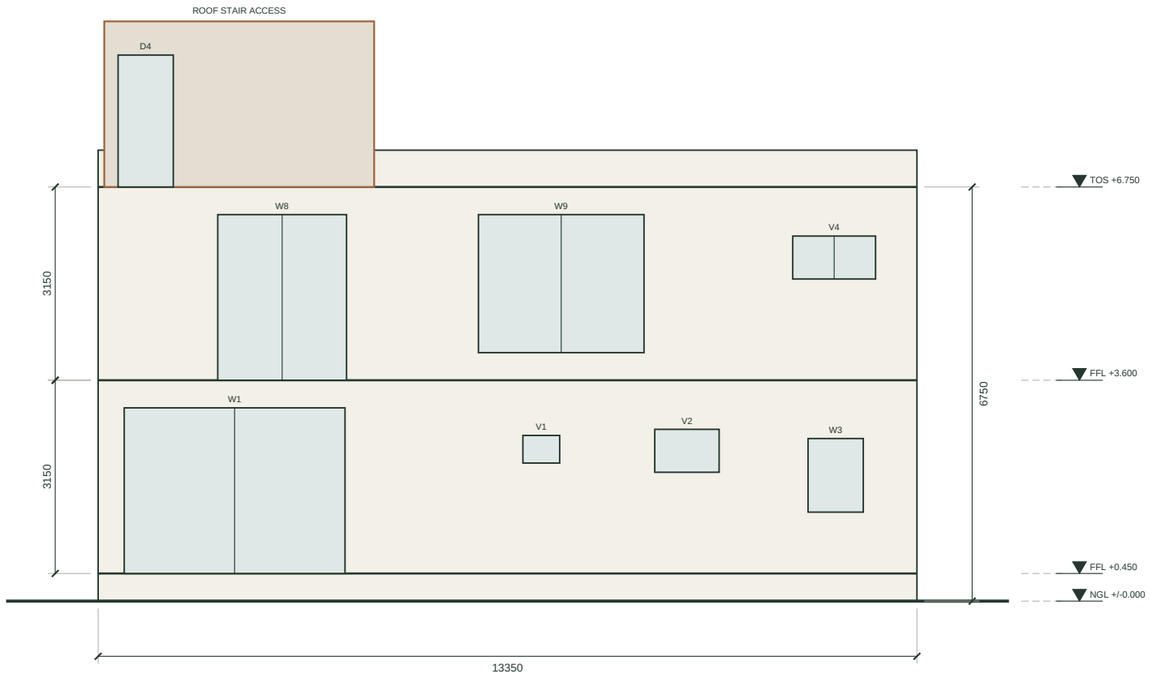


0 m 2 m 4 m

The Verandah House

## DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.

Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.


SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Right elevation

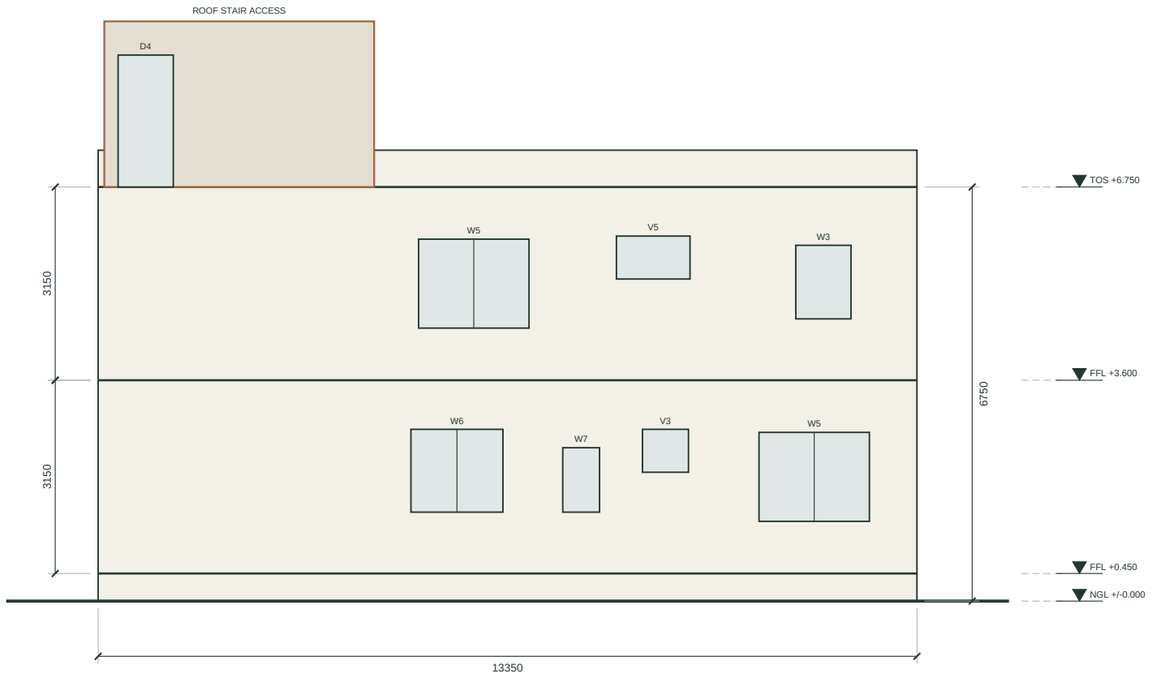


0 m 2 m 4 m

The Verandah House

## DRAWING NOTES

Wall and opening heights derive from the building model; levels in metres above NGL.

This elevation records the primary wall plane.


Decorative facade accessories are coordinated in 3D, not fully detailed here.

No cladding anchors or construction joints are designed.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Section A-A / x = 9.45 m

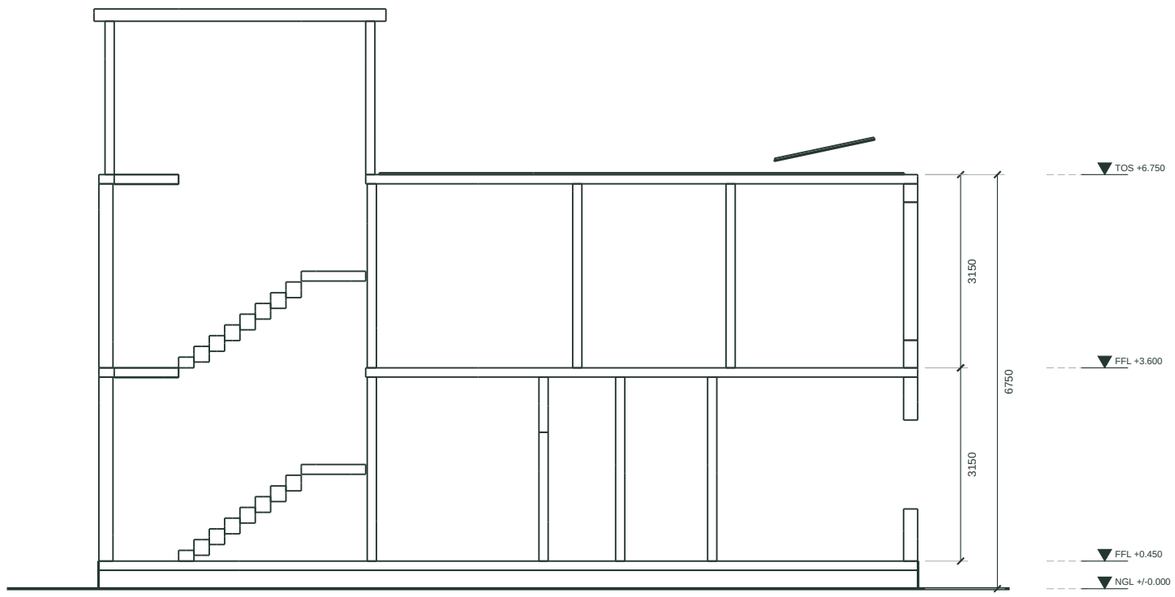


0 m 2 m 4 m

The Verandah House

DRAWING NOTES

Actual mesh-plane intersections, not a generic stair illustration.

Cut objects: walls, floor slabs, roof, stair and plinth. Levels in metres above NGL.

No reinforcement or foundation design is represented.

Stair headroom and handrails require a separate professional check.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

Door, window and room schedules

## DOOR AND WINDOW SCHEDULE

| TAG | DESCRIPTION | SIZE W x H (mm) | SILL | NO. | LOCATION |
|---|---|---|---|---|---|
| D1 | Flush door, water-resistant (WPC) | 750 x 2100 | - | 7 | Bath 1, Common bath, Linen store +4 more |
| D2 | Flush door, hardwood frame | 900 x 2100 | - | 6 | Bedroom 1, Pooja, Study, Bedroom 2 +1 more |
| D3 | Main door, solid timber leaf in frame | 1200 x 2600 | - | 1 | Living |
| D4 | Flush door, hardwood frame | 900 x 2150 | - | 1 | Roof terrace |
| SD1 | Sliding glazed door, aluminium | 2700 x 2600 | - | 1 | Family lounge / Open terrace |
| O1 | Cased opening, no leaf | 900 x 2100 | - | 3 | Bedroom 1 / Dress 1 +2 more |
| O2 | Cased opening, no leaf | 1500 x 2100 | - | 1 | Dining / Kitchen |
| W1 | Sliding window, aluminium | 3600 x 2700 | - | 1 | Living |
| W2 | Sliding window, aluminium | 5400 x 2700 | - | 1 | Living |
| W3 | Sliding window, aluminium | 900 x 1200 | 1000 | 5 | Dress 1, Master dress, Dress 2 |
| W4 | Sliding window, aluminium | 2400 x 2250 | 450 | 1 | Bedroom 1 |
| W5 | Sliding window, aluminium | 1800 x 1450 | 850 | 3 | Study |
| W6 | Sliding window, aluminium | 1500 x 1350 | 1000 | 1 | Kitchen |
| W7 | Sliding window, aluminium | 600 x 1050 | 1000 | 1 | Utility |
| W8 | Sliding window, aluminium | 2100 x 2700 | - | 1 | Family lounge |
| W9 | Sliding window, aluminium | 2700 x 2250 | 450 | 2 | Master bedroom, Bedroom 2 |
| W10 | Sliding window, aluminium | 3000 x 2700 | - | 1 | Family lounge |
| V1 | Ventilator, obscured glass / louvres | 600 x 450 | 1800 | 2 | Store, Linen store |
| V2 | Ventilator, obscured glass / louvres | 1050 x 700 | 1650 | 1 | Bath 1 |
| V3 | Ventilator, obscured glass / louvres | 750 x 700 | 1650 | 1 | Common bath |
| V4 | Ventilator, obscured glass / louvres | 1350 x 700 | 1650 | 1 | Master bath |
| V5 | Ventilator, obscured glass / louvres | 1200 x 700 | 1650 | 2 | Master bath, Bath 2 |

## ROOM SCHEDULE (CLEAR SIZE OF THE PRINCIPAL RECTANGLE)

| SPACE | FLOOR | CLEAR SIZE (m) | CLEAR SIZE (ft-in) | AREA m2 | AREA ft2 |
|---|---|---|---|---|---|
| Living | Ground | 8.67 x 4.14 | 28'5" x 13'7" | 36.29 | 391 |
| Kitchen | Ground | 3.29 x 2.65 | 10'10" x 8'8" | 8.73 | 94 |
| Utility | Ground | 3.29 x 1.10 | 10'10" x 3'7" | 3.62 | 39 |
| Dining | Ground | 4.65 x 3.98 | 15'3" x 13'0" | 18.59 | 200 |
| Pooja | Ground | 2.69 x 1.35 | 8'10" x 4'5" | 3.64 | 39 |
| Store | Ground | 2.69 x 2.40 | 8'10" x 7'10" | 6.47 | 70 |
| Hall | Ground | 1.35 x 2.67 | 4'5" x 8'9" | 3.61 | 39 |
| Linen store | Ground | 1.35 x 1.79 | 4'5" x 5'11" | 2.42 | 26 |
| Common bath | Ground | 3.29 x 1.35 | 10'10" x 4'5" | 4.45 | 48 |
| Study | Ground | 3.29 x 3.04 | 10'10" x 10'0" | 10.03 | 108 |
| Bedroom 1 | Ground | 3.75 x 4.54 | 12'4" x 14'11" | 17.04 | 183 |
| Dress 1 | Ground | 2.10 x 2.35 | 6'10" x 7'8" | 4.91 | 53 |
| Bath 1 | Ground | 2.10 x 2.05 | 6'10" x 6'9" | 4.29 | 46 |
| Family lounge | First | 8.67 x 2.71 | 28'5" x 8'11" | 28.66 | 308 |
| Open terrace | First | 4.79 x 1.44 | 15'9" x 4'8" | 7.32 | 79 |
| Hall | First | 1.20 x 4.53 | 3'11" x 14'10" | 5.43 | 58 |
| Study | First | 5.25 x 3.20 | 17'2" x 10'6" | 16.78 | 181 |
| Bedroom 2 | First | 4.65 x 4.00 | 15'3" x 13'1" | 22.70 | 244 |
| Dress 2 | First | 1.79 x 2.75 | 5'11" x 9'0" | 4.93 | 53 |
| Bath 2 | First | 1.79 x 2.35 | 5'11" x 7'9" | 4.22 | 45 |
| Master bedroom | First | 4.20 x 6.05 | 13'9" x 19'10" | 25.38 | 273 |
| Master dress | First | 1.95 x 2.40 | 6'5" x 7'10" | 4.67 | 50 |
| Master bath | First | 2.10 x 2.40 | 6'10" x 7'10" | 5.02 | 54 |
| Roof terrace | Roof terrace | 11.40 x 11.80 | 37'5" x 38'9" | 133.05 | 1432 |


Nominal structural opening sizes; frames, tolerances and clear passage widths need detailing.

Room sizes are clear dimensions of the principal rectangle between finished wall faces.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION

Survey, structure, services, byelaws and professional approval remain outstanding.

Coordination axes / NOT a structural design

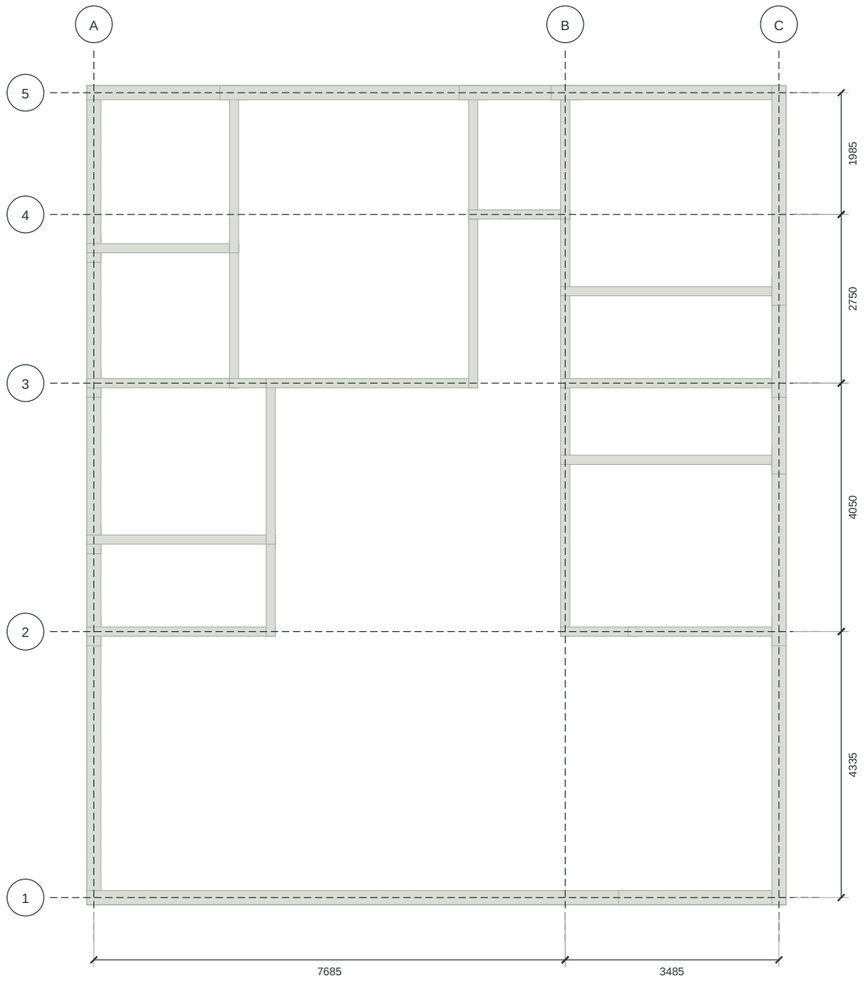


0 m 2 m 4 m

The Verandah House

## DRAWING NOTES

Axes follow the outer walls and the long interior walls; they are NOT column locations.

No column, beam, slab or footing is sized or certified.

Engineer must establish an actual load path and lateral system.

No soil-bearing capacity is inferred from a soil photograph.

SCALE 1:100 AT A3 / CUT +1200 mm

Dimensions govern; do not scale from a screen.

# FLOORFORGE / REVIEW / SCOPE

| | |
|---|---|
| Geometry | preliminary_geometry_pass |
| Regulatory | NOT EVALUATED |
| Structure | NOT DESIGNED |
| Accessibility | NOT CERTIFIED |

Passing geometric checks is not evidence of construction safety or statutory compliance.

# FLOORFORGE / COST / SCENARIO

| | |
|---|---|
| Gross floor area | 3276.32 ft2 |
| Illustrative range | INR 72.08 - 100.91 lakh |
| Owner budget | INR 65 lakh |
| Rates | [2000, 2800] INR/ft2 |

Illustrative user-editable gross-plan-envelope rates, including open terrace cells. NOT a quote, tender, BOQ or market survey.

Excluded: land, approvals and professional fees, tax treatment, abnormal foundations, lifts, loose furniture, external services

No reinforcement quantities or cement bag counts are invented from floor area.

# FLOORFORGE / SITE / SERVICES / STRUCTURE

| | |
|---|---|
| Soil | unknown |
| Foundation recommendation | NOT PROVIDED: requires geotechnical design |
| Solar elevation | 47.93 degrees |
| Vastu score | 19 / advisory only |

A soil name or photograph cannot establish bearing capacity, swelling or an appropriate foundation.

Cluster wet areas; a plumbing designer must size and route stacks, vents and gradients.

No electrical cable sizing, protection coordination or circuit approval.

No medical gas, life-support power or ICU services design.

Preference heuristic from supplied brief, not a safety or scientific rating. Strict requests are flagged, not guaranteed.

Solar method: NOAA-style closed-form solar study; no atmospheric refraction

# FLOORFORGE / TIMELINE / ASSUMPTIONS

| | |
|---|---|
| Survey, soil and approvals | Week 0 + 6 weeks |
| Foundations and substructure | Week 6 + 5 weeks |
| Frame and roof | Week 11 + 12 weeks |
| Masonry and services | Week 19 + 7 weeks |
| Finishes and joinery | Week 26 + 8 weeks |
| Testing and handover | Week 34 + 2 weeks |

Illustrative overlapping phases, not a contractual or local construction schedule.

No government review period or supply lead time has been verified.

# FLOORFORGE / OPENING SCHEDULE

| | |
|---|---|
| D1 x7 | Flush door, water-resistant (WPC) / 750 x 2100 / sill 0 mm |
| D2 x6 | Flush door, hardwood frame / 900 x 2100 / sill 0 mm |
| D3 x1 | Main door, solid timber leaf in frame / 1200 x 2600 / sill 0 mm |
| D4 x1 | Flush door, hardwood frame / 900 x 2150 / sill 0 mm |
| SD1 x1 | Sliding glazed door, aluminium / 2700 x 2600 / sill 0 mm |
| O1 x3 | Cased opening, no leaf / 900 x 2100 / sill 0 mm |
| O2 x1 | Cased opening, no leaf / 1500 x 2100 / sill 0 mm |
| W1 x1 | Sliding window, aluminium / 3600 x 2700 / sill 0 mm |
| W2 x1 | Sliding window, aluminium / 5400 x 2700 / sill 0 mm |
| W3 x5 | Sliding window, aluminium / 900 x 1200 / sill 1000 mm |
| W4 x1 | Sliding window, aluminium / 2400 x 2250 / sill 450 mm |
| W5 x3 | Sliding window, aluminium / 1800 x 1450 / sill 850 mm |
| W6 x1 | Sliding window, aluminium / 1500 x 1350 / sill 1000 mm |
| W7 x1 | Sliding window, aluminium / 600 x 1050 / sill 1000 mm |
| W8 x1 | Sliding window, aluminium / 2100 x 2700 / sill 0 mm |
| W9 x2 | Sliding window, aluminium / 2700 x 2250 / sill 450 mm |
| W10 x1 | Sliding window, aluminium / 3000 x 2700 / sill 0 mm |
| V1 x2 | Ventilator, obscured glass / louvres / 600 x 450 / sill 1800 mm |
| V2 x1 | Ventilator, obscured glass / louvres / 1050 x 700 / sill 1650 mm |
| V3 x1 | Ventilator, obscured glass / louvres / 750 x 700 / sill 1650 mm |
| V4 x1 | Ventilator, obscured glass / louvres / 1350 x 700 / sill 1650 mm |
| V5 x2 | Ventilator, obscured glass / louvres / 1200 x 700 / sill 1650 mm |

Nominal wall opening dimensions. Frames, tolerances and clear passage require detailing.

PRELIMINARY - ENGINEER TO REVIEW - NOT FOR CONSTRUCTION